Moluce

Lighting Producer

Professional Super-excellent Commercial LED Lighting Manufacturer

2026 Ver.

Moluce

Lighting Producer

ShenZhen Moluce Lighting Co.,ltd

Add: #F building ,xinhui industry area ,tangtou 3rd industry park ,shiyan ,shenzhen ,China ,518108

Tel: +86-755-86062259 Fax:+86-755-86062219

E-mail:info@kwtled.com Whatapp :+86-134-24327320

Moluce Lighting(S) Pte Ltd

Add:320 Serangoon Road,#12-03 Centrium Square, Singapore218108

Warehouse:3012 Bedok Industrial Park E#03-2056 Singapore489978

Mobile:+6586008601

Email:ben@moluce.com/info@moluceledsg.com

www.moluce.com www.kwtled.com

NO QUALITY CONTROL AND CREDIT

NO BRIGHT FUTURE

BRAND CULTURE

Enterprise Mission

Design and manufacture perfect LED lamps
to improve human being's environment

Enterprise Forecast

To be a leading LED commercial lighting enterprise
satisfying customers' demand in market orientation

Core Value

Customer first, sincerity, responsibitity and
innovation

Enterprise Spirit

Confidence, teamwork, responsibility and tolerance

Business Philosophy

Honesty, pratice and efficiency

Strategy Core

Quality First, Innovation and Breakthrough

Customer Service Philosophy

To be customers' reliable partner








LIGHTING

is one part of the smart home

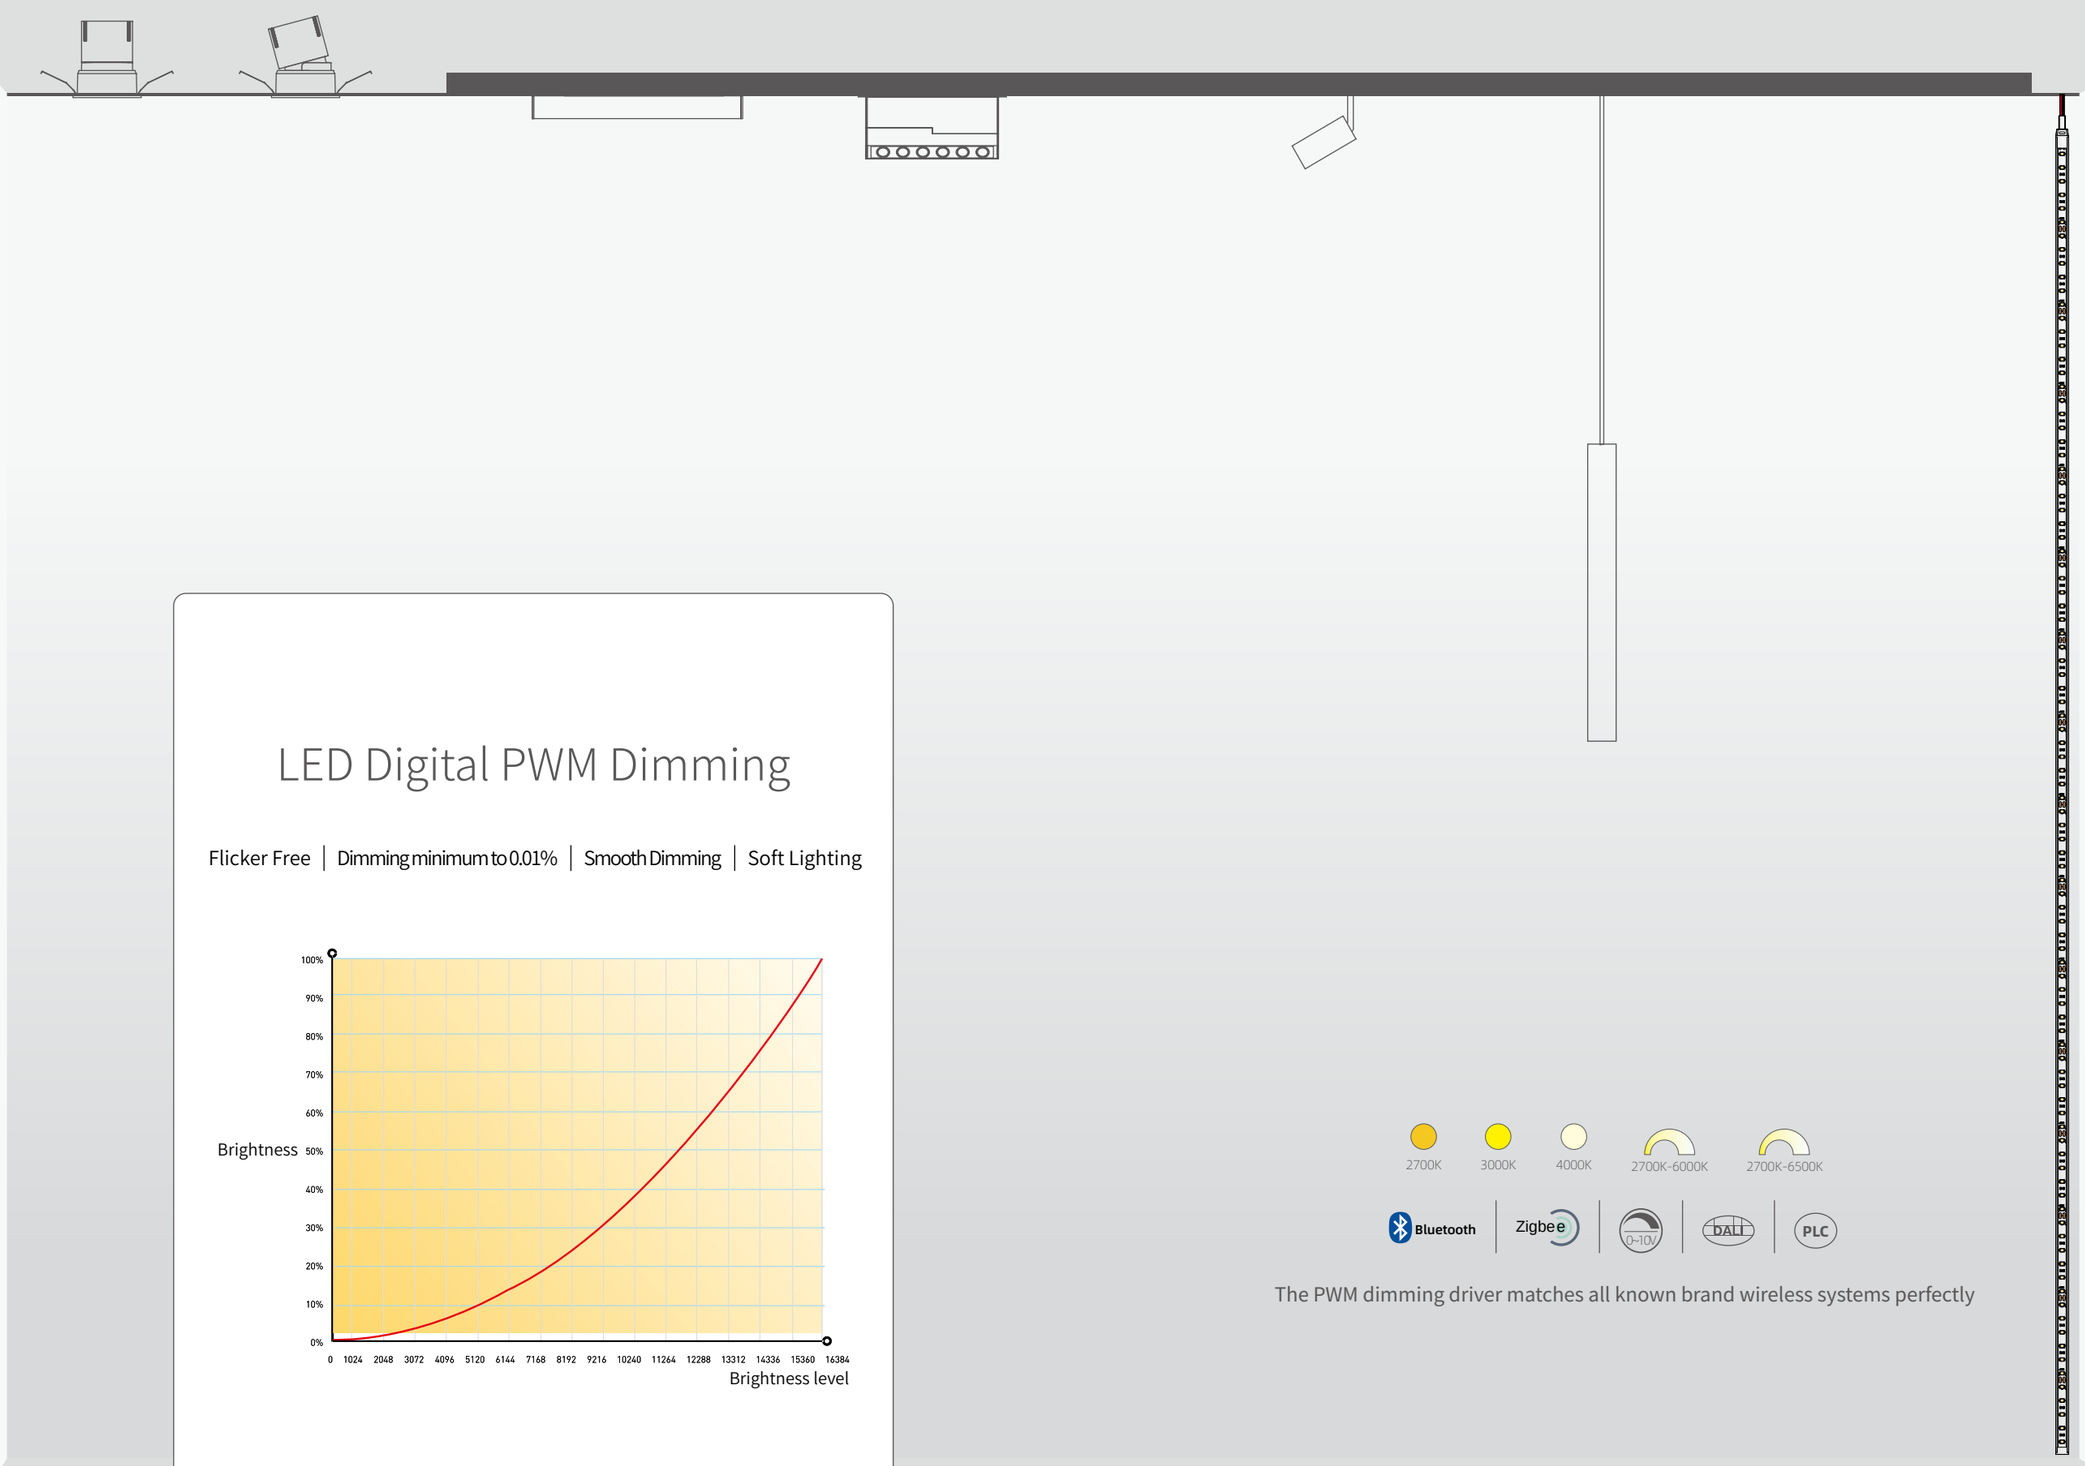

LED Digital PWM Dimming

Flicker Free | Dimming minimum to 0.01% | Smooth Dimming | Soft Lighting

2700K 3000K 4000K 2700K-6000K 2700K-6500K

Bluetooth | Zigbee | 0-10V | DALI | PLC


The PWM dimming driver matches all known brand wireless systems perfectly

DEEPLY ANTI GLARE

The both Optical lens and reflectors are designed by KWT ,
They help to achieve smooth and soft lighting , and deeply anti-glare .

Luminaire cut-off at 40°




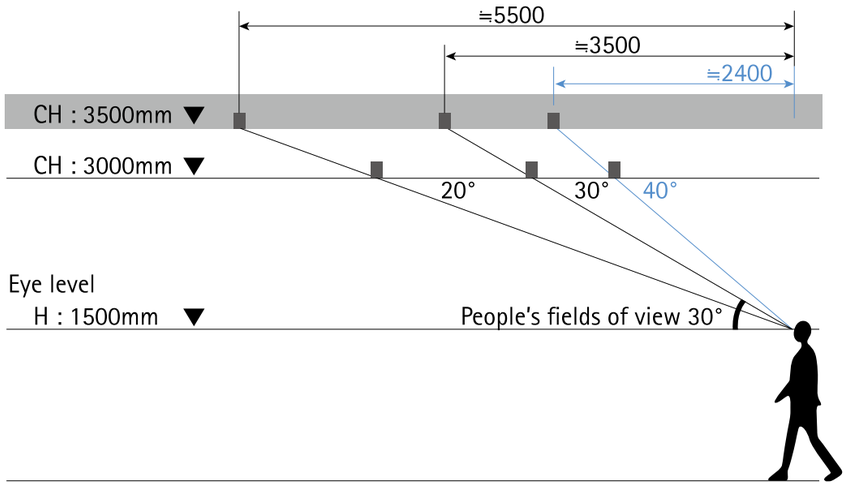

LONG LIFE- SPAN


After mock testing in the special enviroment , we get the result of the light life-span over
40,000 hours

The relationship between LED life time and temperature

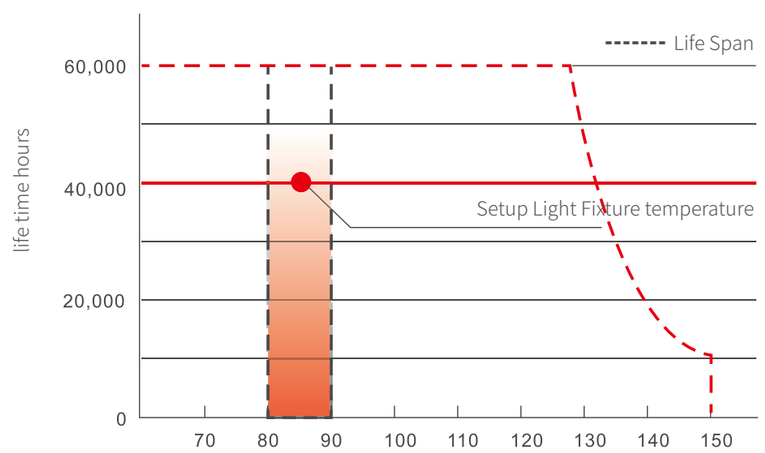

Brightness maintenance rate


High brightness maintenance rate , ensure the high lumens of light fixure under life-span

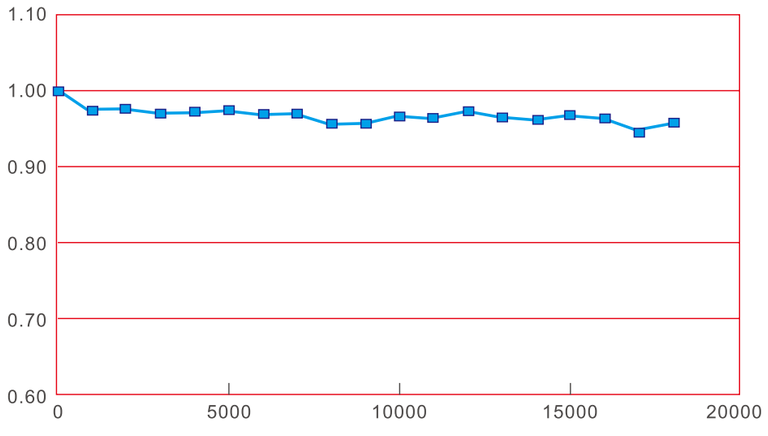

HEAT DISSIPATION

How long the light fixture's life-span ,it depend on the performance of heat dissipatation . We found a best solution to improve the heat dissipated away faster after mock testing , So the brightness reduction less 6% after 40000 hours .

Mock testing the light fixture works how long hours under highest temperature

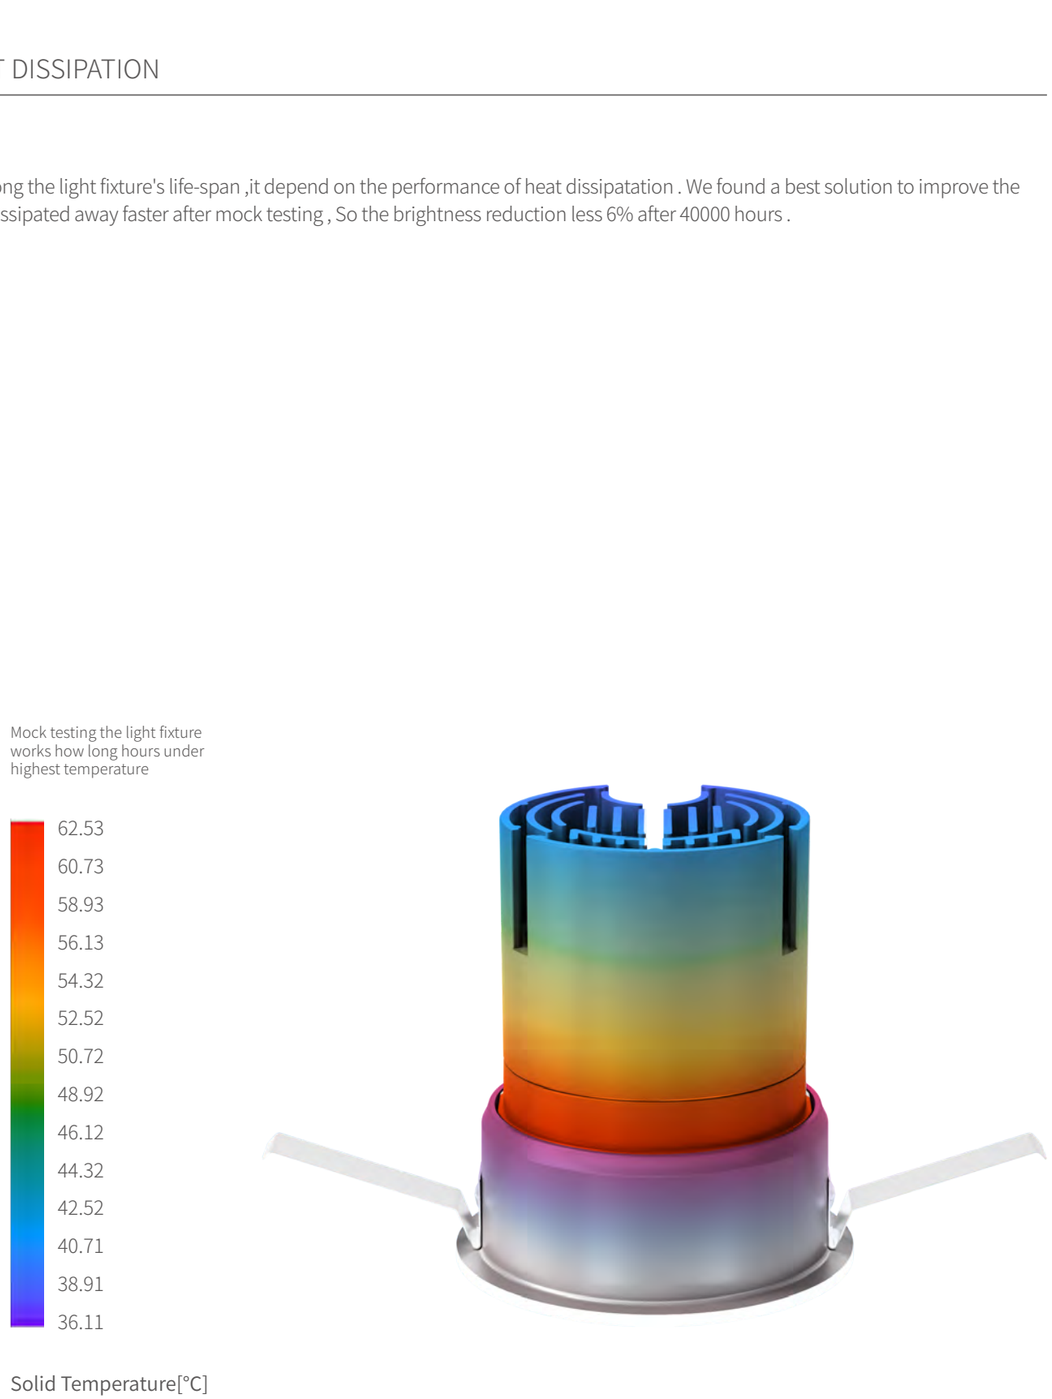


Solid Temperature[°C]


SOLUTION OF FLICKER FREE DRIVER


The driver frenquency flicker causes people feel uncomfortable , such as eyes' tired ,headach , have a break down etc .So the flicker free driver is the most important for lighting


Frenquency Flicker

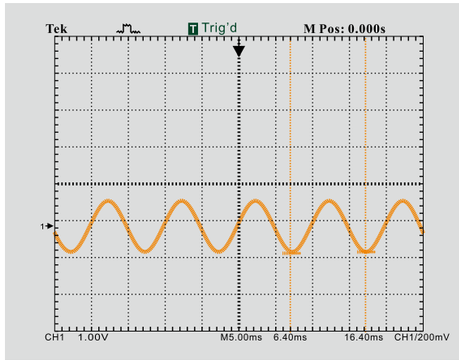

Flicker Free

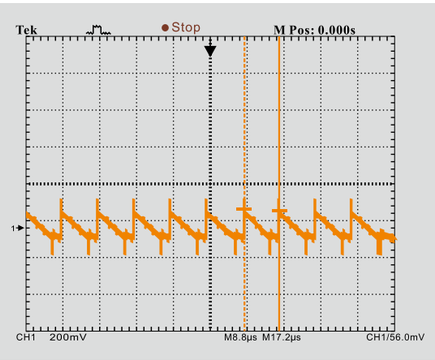

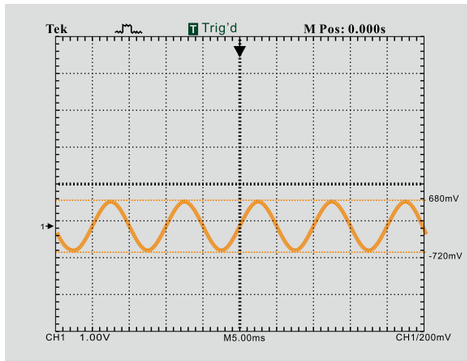

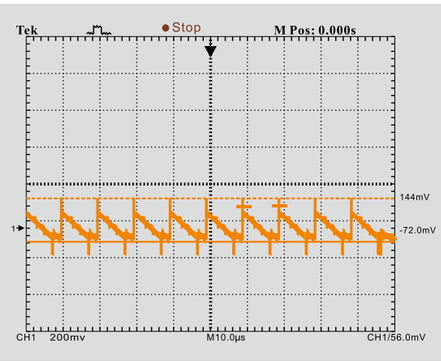


COLOR RENDERING INDEX

A color rendering index (CRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with a natural or standard light source. Light sources with a high CRI are desirable in color-critical applications such as neonatal care and art restoration.

Color rendering, as defined by the International Commission on Illumination (CIE),
is the effect of an illuminant on the color appearance of objects
by conscious or subconscious comparison with their color appearance under a reference or standard illuminant



Scale CRI

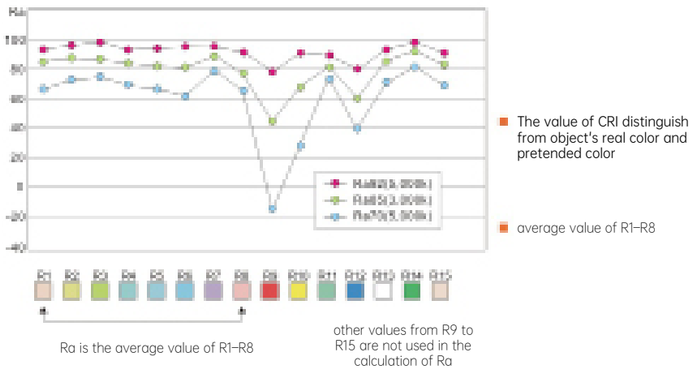

LIGHTING TERMINOLOGY


Terminogy	Interpretation
Luminous Flux	Luminous flux is a measure of the power of visible light produced by a light source or light fitting. It is measured in lumens (lm).
Luminous Efficacy	It is the ratio of luminous flux to power, measured in lumens per watt (lm/w) in the International System of Units (SI)
Illuminance	the action of supplying or brightening with light or the resulting state.
Colour Temperature	Color temperature is a way to describe the light appearance provided by a light bulb. It is measured in degrees of Kelvin (K) on a scale from 1,000 to 10,000. Typically, Kelvin temperatures for commercial and residential lighting applications fall somewhere on a scale from 2000K to 6500K.
Junction Temperature	the junction temperature, which is short for transistor junction temperature (semiconductor), is the maximum operating temperature of the actual semiconductor in use in the electronic device. During operation, it is higher than the temperature of the part's exterior and the case temperature

CONTENT

WYNDHAM RECESSED DOWNLIGHT SERIES P06-P35



HDM MINI RECESSED DONLIGHT SERIES P36-P45

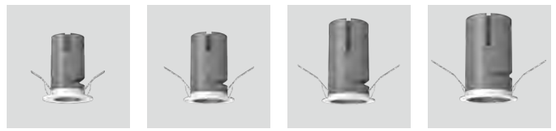

POKEMON RECESSED DOWNLIGHT SERIES P46-P71



BULGARI RECESSED DOWNLIGHT SERIES P72-P135



DLC RECESSED DOWNLIGHT SERIES P136-P151




DLD RECESSED DOWNLIGHT SERIES P152-P163



DLE RCESSED DOWNLIGHT SERIES P164-P165




DLG RECESSED DOWNLIGHT SERIES P166-P167



SURFACE MOUNTED DOWNLIGHT SERIES P168-179



PENDANT LAMP SERIES P180-P197

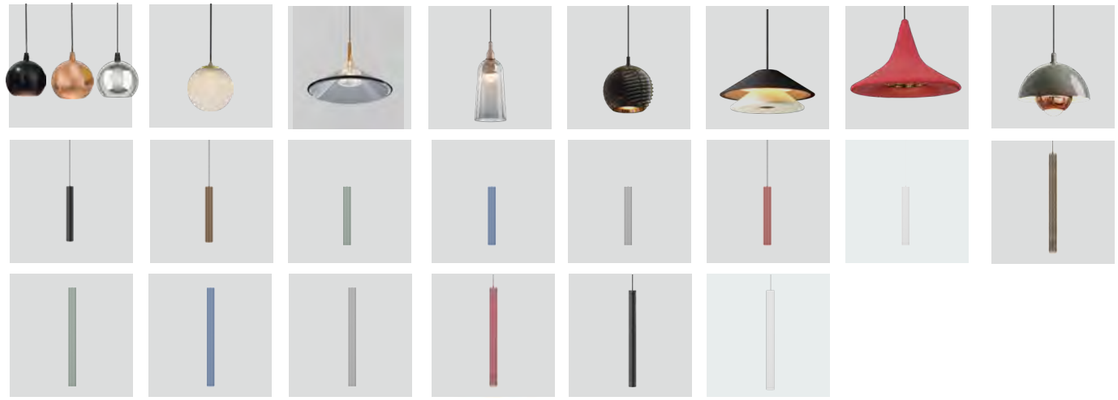

AR111 & GRILLE LIGHT SERIES P198-P205



LED TRACK LIGHT SERIES P206-P227



RC RECESSED SPOTLIGHT SERIES P228-P233




RM SURFACE MOUNTED SPOTLIGHT SERIES P234-P236




PULL OUT SPOTLIGHT SERIES P240-P255



MAGNETIC SYSTEM V3.0 P256-P287

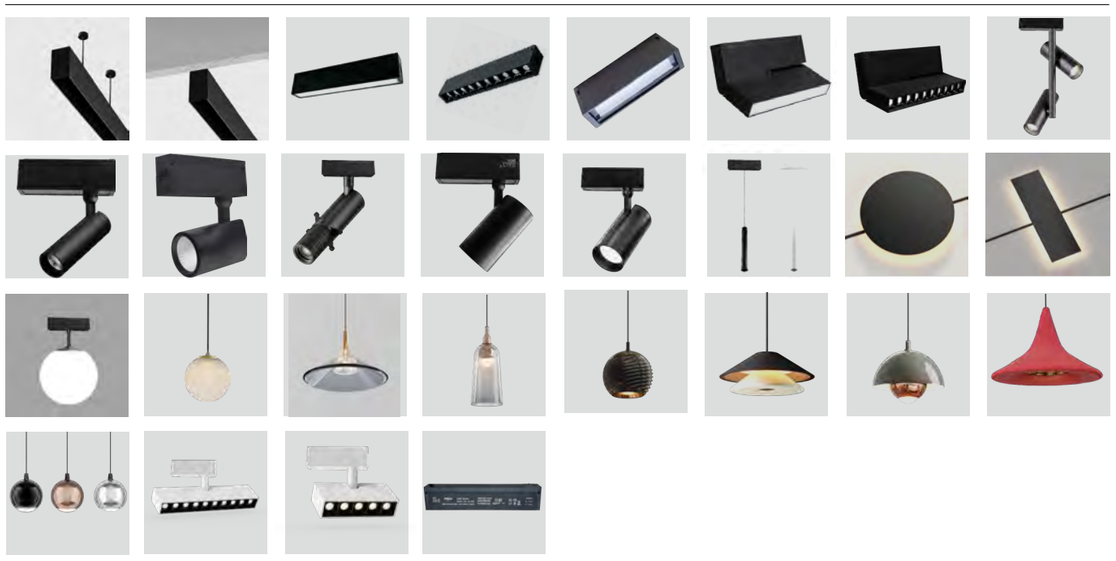


MAGNETIC SYSTEM V4.0 P288-P323

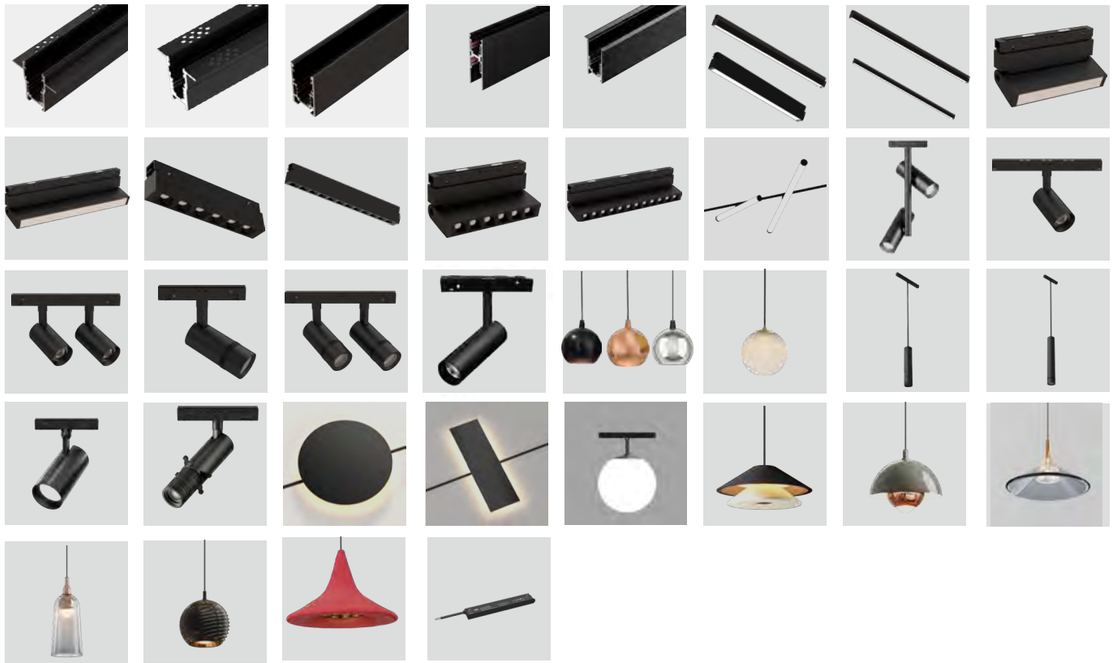

CURVE MAGNETIC SYSTEM V6.0 P324-P335



V7.0 Ultra Slim Track System P336-P359

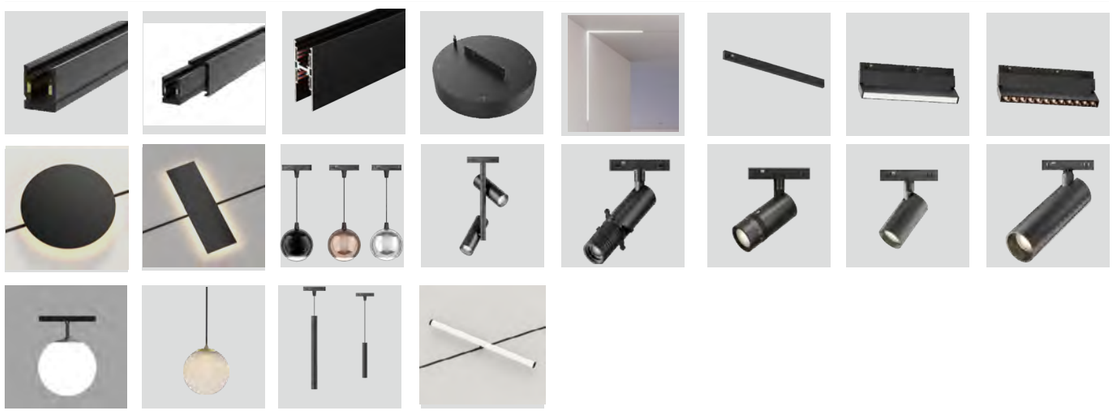


ARMANI RECESSED LINEAR SERIES P360-P363



LED FLEXIBLE STRIP SERIES P364-P373



LINEAR PROFILE SERIES P374-P411

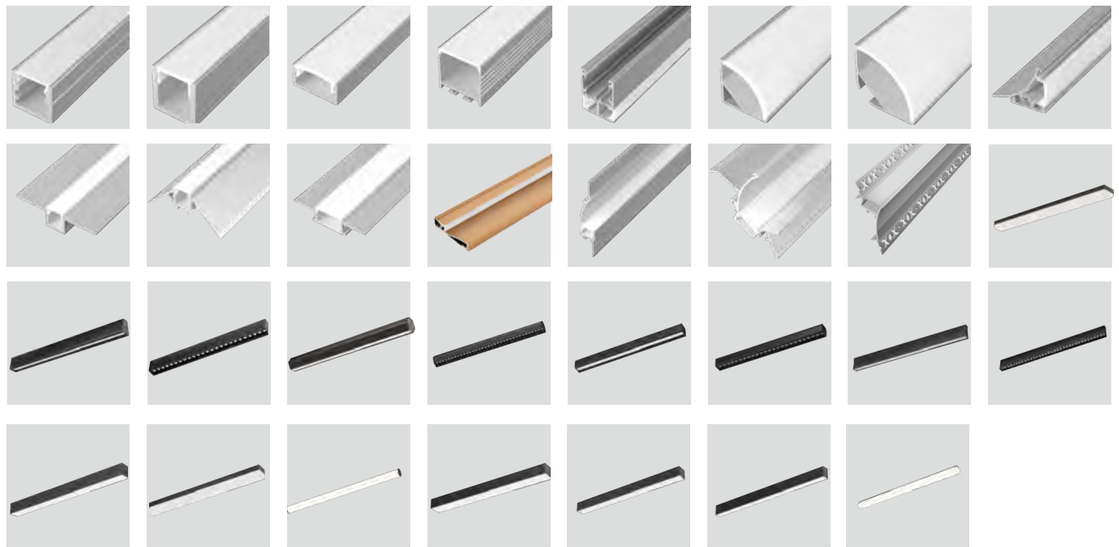

MAGIC WAND FLOOR LAMP P412-P417



CLASSROOM LIGHT, PANEL LIGHT, HIGHBAY AND STADIUM LIGHT SERIES P418-P423




WALL LIGHT P424-P435



ADJUSTABLE INGROUND LIGHT P436-437



INGROUND LIGHT P438-P449

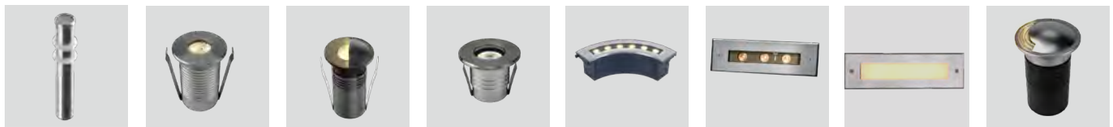

LANDSCAPE SPOTLIGHT P450-P467



POOL LIGHT P468-P487



WALL WASHER LINEAR LIGHT P488-P495



WATERPROOF CEILING MOUNT LIGHT P496-P501



AMBIENT LAMP P502-P509




FLOOD LIGHT AND STREET LIGHT P510-P513



SUNFLOWER SOLAR LIGHT P514-517




Moluce
Lighting Producer

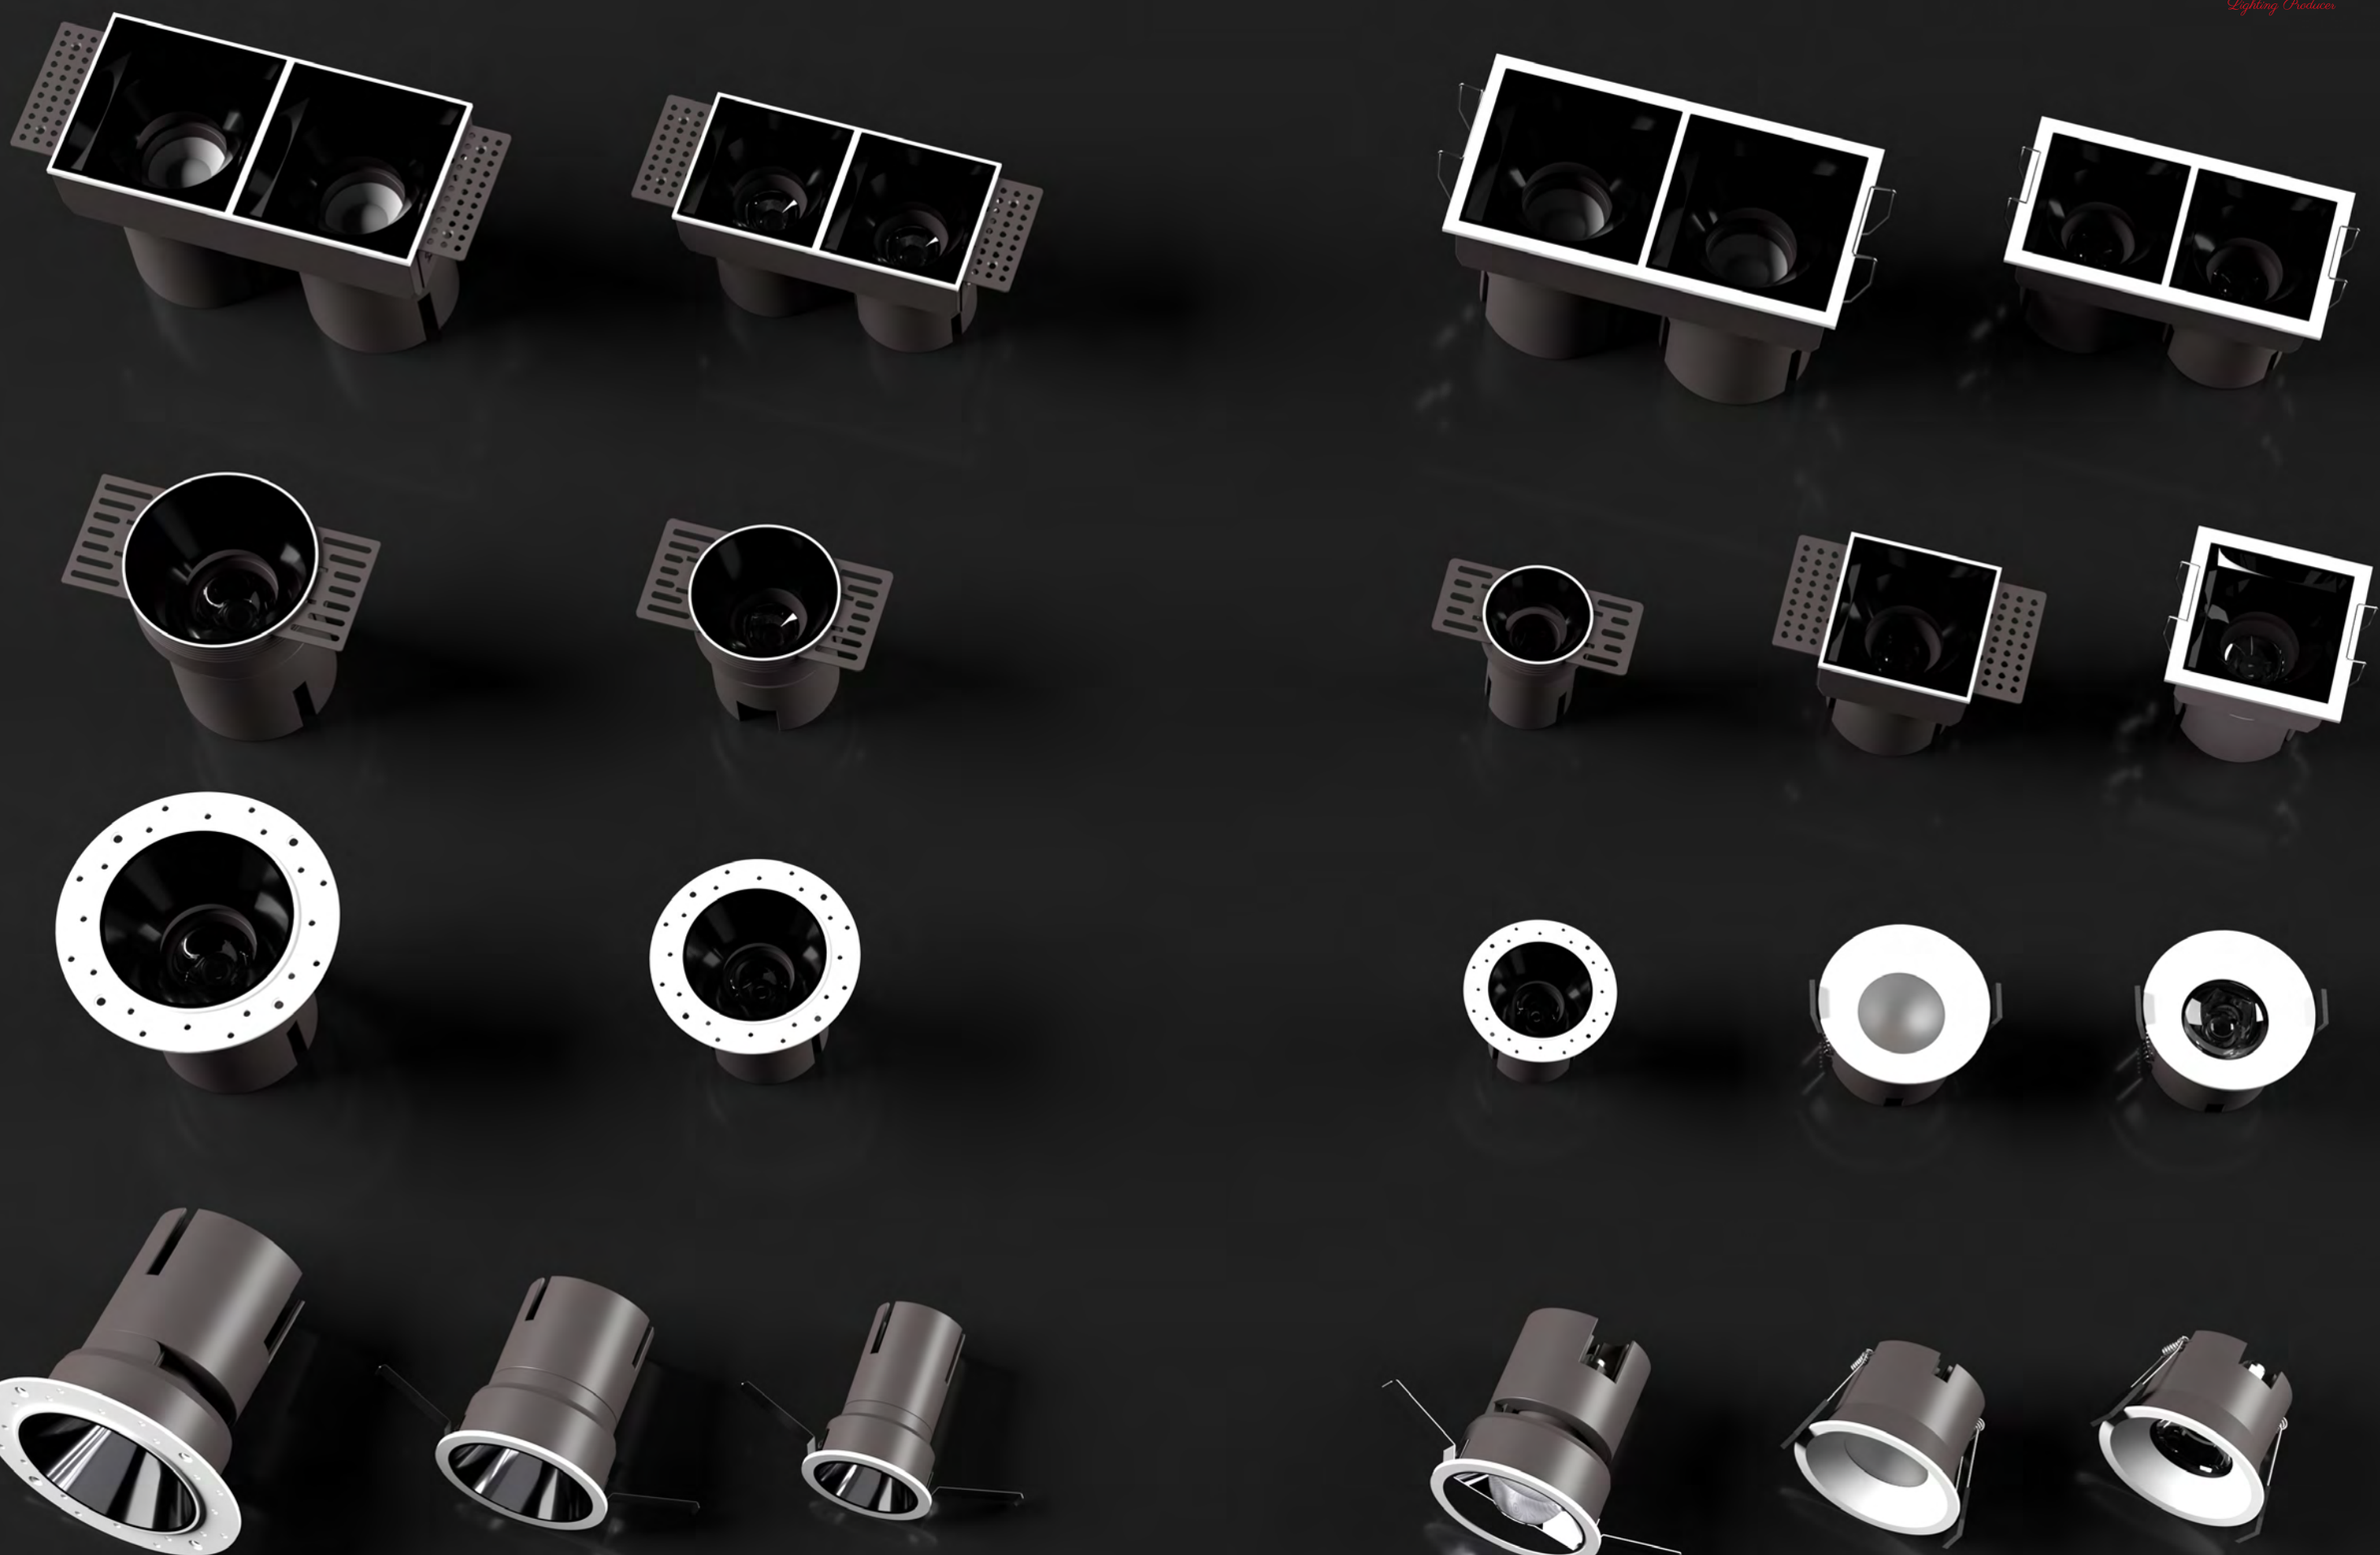

HDL DEEPLY ANTI-GLARE






UGR＜11
Autonomous anti-glare
Patented optical design

- Indoor application
- Deep anti dizziness
- Accurate light control
- Flicker free
- High light efficiency
- High CRI
- IP 20/54 protection grade
- fireproof
- long life
- Anti-Glare
- Low Light decay
- Perfect heat dissipation
- different sizes
- Multiple light distribution



MODULAR DESIGN
multiple Funcation and effects

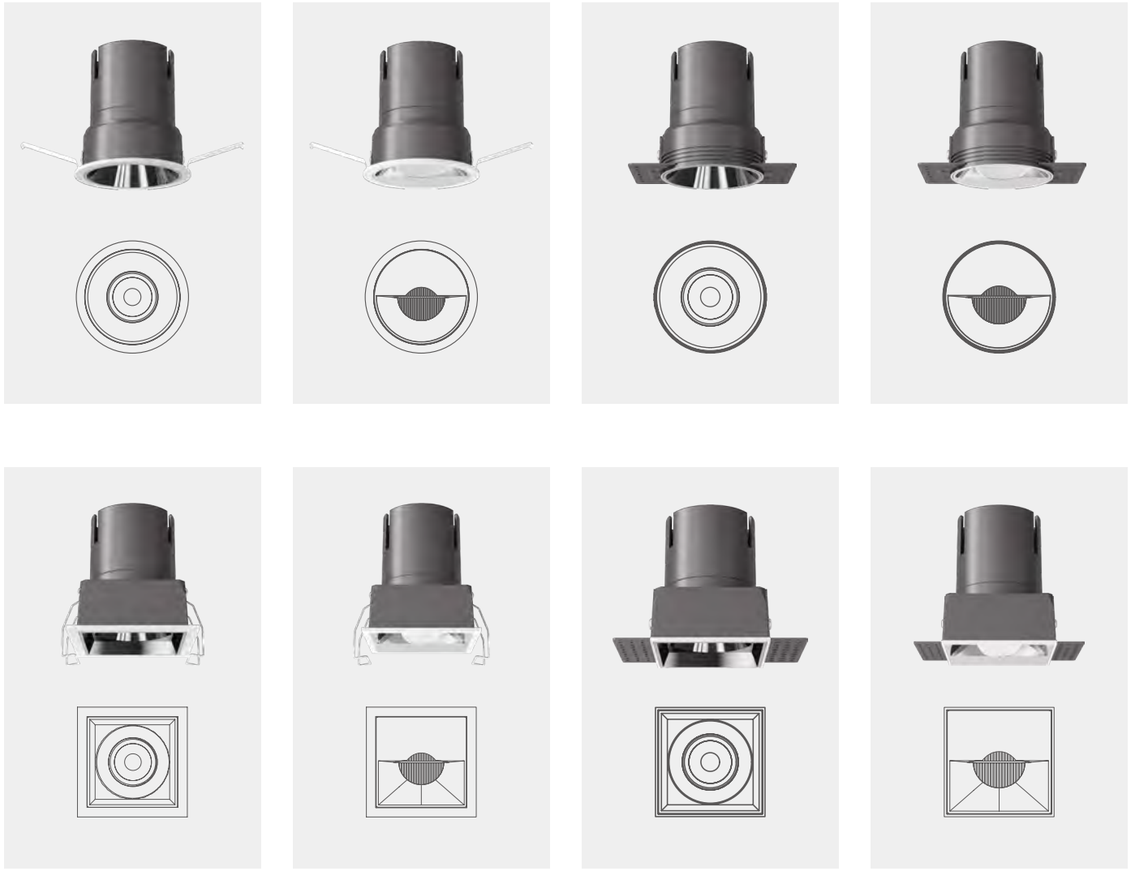




Dazzling black | Deep space black | Moonlight Silver | Linen silver | Ivory white | Metallic gold



Direct Lighting | Adjustable Fixture | Wall Washer Lighting

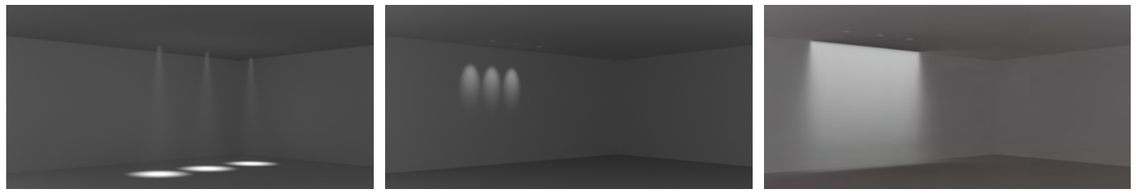




circular wall wash cover | Square wall wash cover | honeycomb | Soft light optical diffuser


WYNDHAM RECESSED
DOWNLIGHT SERIES



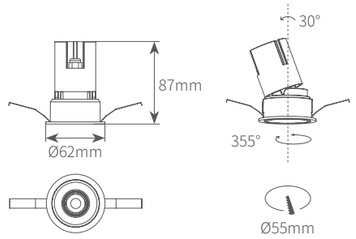

HDL5507

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	7W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2108
2	86	527
3	130	234
4	173	131

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	54	1563
2	109	390
3	163	173
4	218	97

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	80	1007
2	160	251
3	240	112
4	321	63

50° 4000K




H(m)	D(cm)	Em(lux/klm)
1	102	589
2	203	147
3	305	65
4	407	37

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Ivory white


Optional Accessories



honeycomb · Soft light optical diffuser







HDL5507-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	7W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2108
2	86	527
3	130	234
4	173	131

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	54	1563
2	109	390
3	163	173
4	218	97

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	80	1007
2	160	251
3	240	112
4	321	63

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	102	589
2	203	147
3	305	65
4	407	37

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Ivory white

Optional Accessories




honeycomb · Soft light optical diffuser







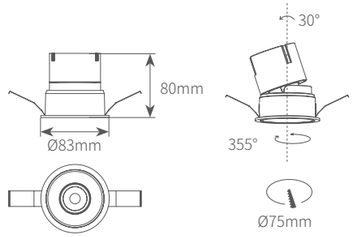

HDL7508

UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	8W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	32	3577
2	63	894
3	95	397
4	126	223

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	1961
2	90	490
3	135	217
4	180	122

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	1246
2	127	312
3	190	138
4	253	78

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	106	585
2	212	146
3	318	65
4	424	37

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





HDL7508-TR

UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	8W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	32	3577
2	63	894
3	95	397
4	126	223

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	1961
2	90	490
3	135	217
4	180	122

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	1246
2	127	312
3	190	138
4	253	78

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	106	585
2	212	146
3	318	65
4	424	37

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



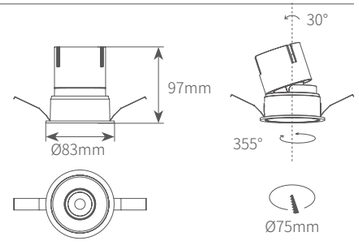

HDL7512

UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	4789
2	63	1197
3	95	532
4	126	299

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	2452
2	91	613
3	136	272
4	179	153

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	2190
2	126	547
3	189	243
4	251	137

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	98	1092
2	197	273
3	295	121
4	394	68

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





HDL7512-TR

UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	4789
2	63	1197
3	95	532
4	126	299

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	2452
2	91	613
3	136	272
4	179	153

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	2190
2	126	547
3	189	243
4	251	137

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	98	1092
2	197	273
3	295	121
4	394	68

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





HDLS7512

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	33	5018
2	65	1254
3	98	557
4	131	313

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	2850
2	89	712
3	134	317
4	179	178

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	64	1634
2	128	408
3	192	182
4	256	102

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	108	751
2	216	188
3	324	83
4	432	47

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





HDLS7512-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	33	5018
2	65	1254
3	98	557
4	131	313

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	2850
2	89	712
3	134	317
4	179	178

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	64	1634
2	128	408
3	192	182
4	256	102

50° 4000K



H(m)	D(cm)	Em(lux/klm)
1	108	751
2	216	188
3	324	83
4	432	47

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



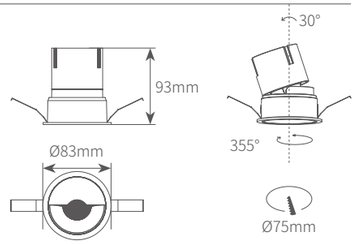

HDL7512-W

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K




H(m)	D(cm)	Em(lux/klm)
1	60	590
2	120	147
3	179	66
4	239	37

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	60	677
2	120	169
3	179	75
4	239	42





HDL7512-TR-W

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K



H(m)	D(cm)	Em(lux/klm)
1	60	590
2	120	147
3	179	66
4	239	37

35°-70° 4000K




H(m)	D(cm)	Em(lux/klm)
1	60	677
2	120	169
3	179	75
4	239	42

Optional Accessories







HDLS7512-W

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K




H(m)	D(cm)	Em(lux/klm)
1	60	497
2	120	124
3	179	55
4	239	31

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	60	528
2	120	131
3	179	58
4	239	32





HDLS7512-TR-W

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	12W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K




H(m)	D(cm)	Em(lux/klm)
1	60	497
2	120	124
3	179	55
4	239	31

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	60	528
2	120	131
3	179	58
4	239	32



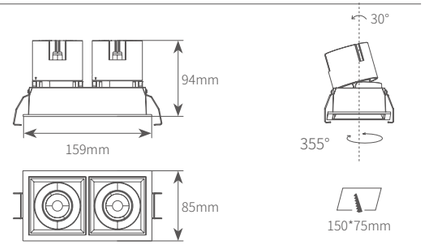

HDLS15075

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W*2
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	33	5018
2	65	1254
3	98	557
4	131	313

25° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	45	2850
2	89	712
3	134	317
4	179	178

35° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	64	1634
2	128	408
3	192	182
4	256	102

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	108	751
2	216	188
3	324	83
4	432	47

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





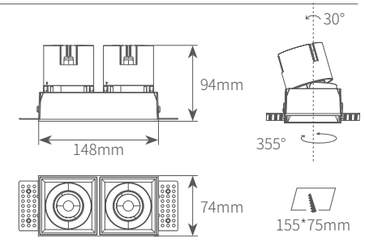

HDLS15075-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W*2
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	33	5018
2	65	1254
3	98	557
4	131	313

25° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	45	2850
2	89	712
3	134	317
4	179	178

35° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	64	1634
2	128	408
3	192	182
4	256	102

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	108	751
2	216	188
3	324	83
4	432	47

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





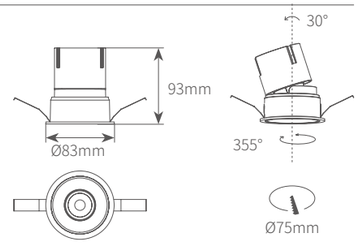

HDL7512-RGB-CW

Color Effect



UGR < 11 · Flicker free · IP20 · DMX · Zigbee

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	cw/ww >60lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

16° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	4789
2	63	1197
3	95	532
4	126	299

25° 3000K




H(m)	D(cm)	Em(lux/klm)
1	45	2452
2	91	613
3	136	272
4	179	153

35° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	2190
2	126	547
3	189	243
4	251	137

50° 4000K




H(m)	D(cm)	Em(lux/klm)
1	98	1092
2	197	273
3	295	121
4	394	68

Optional anti glare cover color







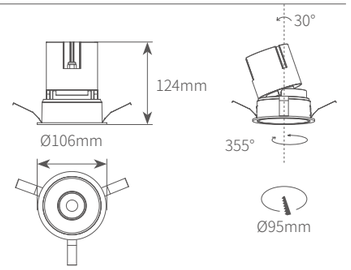

HDL9520

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

20° 3000K




H(m)	D(cm)	Em(lux/klm)
1	37	9331
2	74	2332
3	111	1036
4	148	583

40° 4000K




H(m)	D(cm)	Em(lux/klm)
1	75	2608
2	149	652
3	224	290
4	299	163

30° 3000K



H(m)	D(cm)	Em(lux/klm)
1	53	5253
2	106	1313
3	159	583
4	213	328

60° 4000K



H(m)	D(cm)	Em(lux/klm)
1	100	399
2	200	427
3	299	190
4	399	107

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







HDL9520-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

20° 3000K




H(m)	D(cm)	Em(lux/klm)
1	37	9331
2	74	2332
3	111	1036
4	148	583

40° 4000K




H(m)	D(cm)	Em(lux/klm)
1	75	2608
2	149	652
3	224	290
4	299	163

30° 3000K



H(m)	D(cm)	Em(lux/klm)
1	53	5253
2	106	1313
3	159	583
4	213	328

60° 4000K



H(m)	D(cm)	Em(lux/klm)
1	100	399
2	200	427
3	299	190
4	399	107

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser





HDL9520-W

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞60Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K



H(m)	D(cm)	Em(lux/klm)
1	73	838
2	147	209
3	220	93
4	293	52

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	66	982
2	132	245
3	198	109
4	264	61

Optional anti glare cover color



Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories




honeycomb

Soft light optical diffuser







HDL9520-TR-W

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞60Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K



H(m)	D(cm)	Em(lux/klm)
1	73	838
2	147	209
3	220	93
4	293	52

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	66	982
2	132	245
3	198	109
4	264	61

Optional anti glare cover color



Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white

Optional Accessories




honeycomb

Soft light optical diffuser





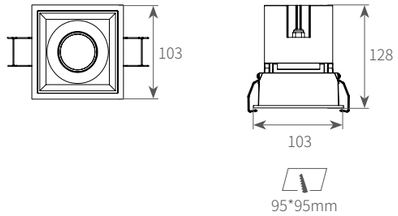

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDLS9520

Product information


Power	20W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K



H(m)	D(cm)	Em(lux/klm)
1	73	838
2	147	209
3	220	93
4	293	52

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	66	982
2	132	245
3	198	109
4	264	61

Optional anti glare cover color



Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white


Optional Accessories



honeycomb

Soft light optical diffuser



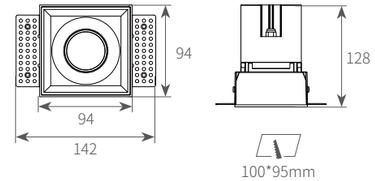

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDLS9520-TR

Product information


Power	20W
Beam angle	wall washer
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35°-70° 3000K



H(m)	D(cm)	Em(lux/klm)
1	73	838
2	147	209
3	220	93
4	293	52

35°-70° 4000K



H(m)	D(cm)	Em(lux/klm)
1	66	982
2	132	245
3	198	109
4	264	61

Optional anti glare cover color



Dazzling black / Deep space black / Moonlight Silver / Linen silver / Ivory white


Optional Accessories



honeycomb

Soft light optical diffuser





HDLS19095

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20W*2
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

20° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	37	9331
2	74	2332
3	111	1036
4	148	583

40° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	75	2584
2	149	646
3	224	287
4	299	161

30° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	53	5253
2	106	1313
3	159	583
4	213	328

60° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	100	1774
2	200	443
3	299	197
4	399	110

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



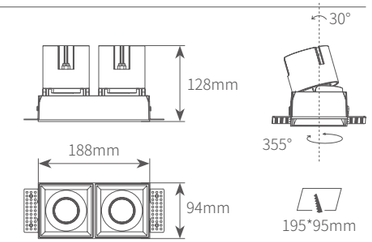

HDLS19095-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20W*2
Beam angle	20°/30°/40°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

20° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	37	9331
2	74	2332
3	111	1036
4	148	583

40° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	75	2584
2	149	646
3	224	287
4	299	161

30° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	53	5253
2	106	1313
3	159	583
4	213	328

60° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	100	1774
2	200	443
3	299	197
4	399	110

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories




honeycomb · Soft light optical diffuser











HDL7512FR


Product information


Power	12W
Beam angle	80°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed










HDL7512FL

Product information


Power	12W
Beam angle	16°/25°/35°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

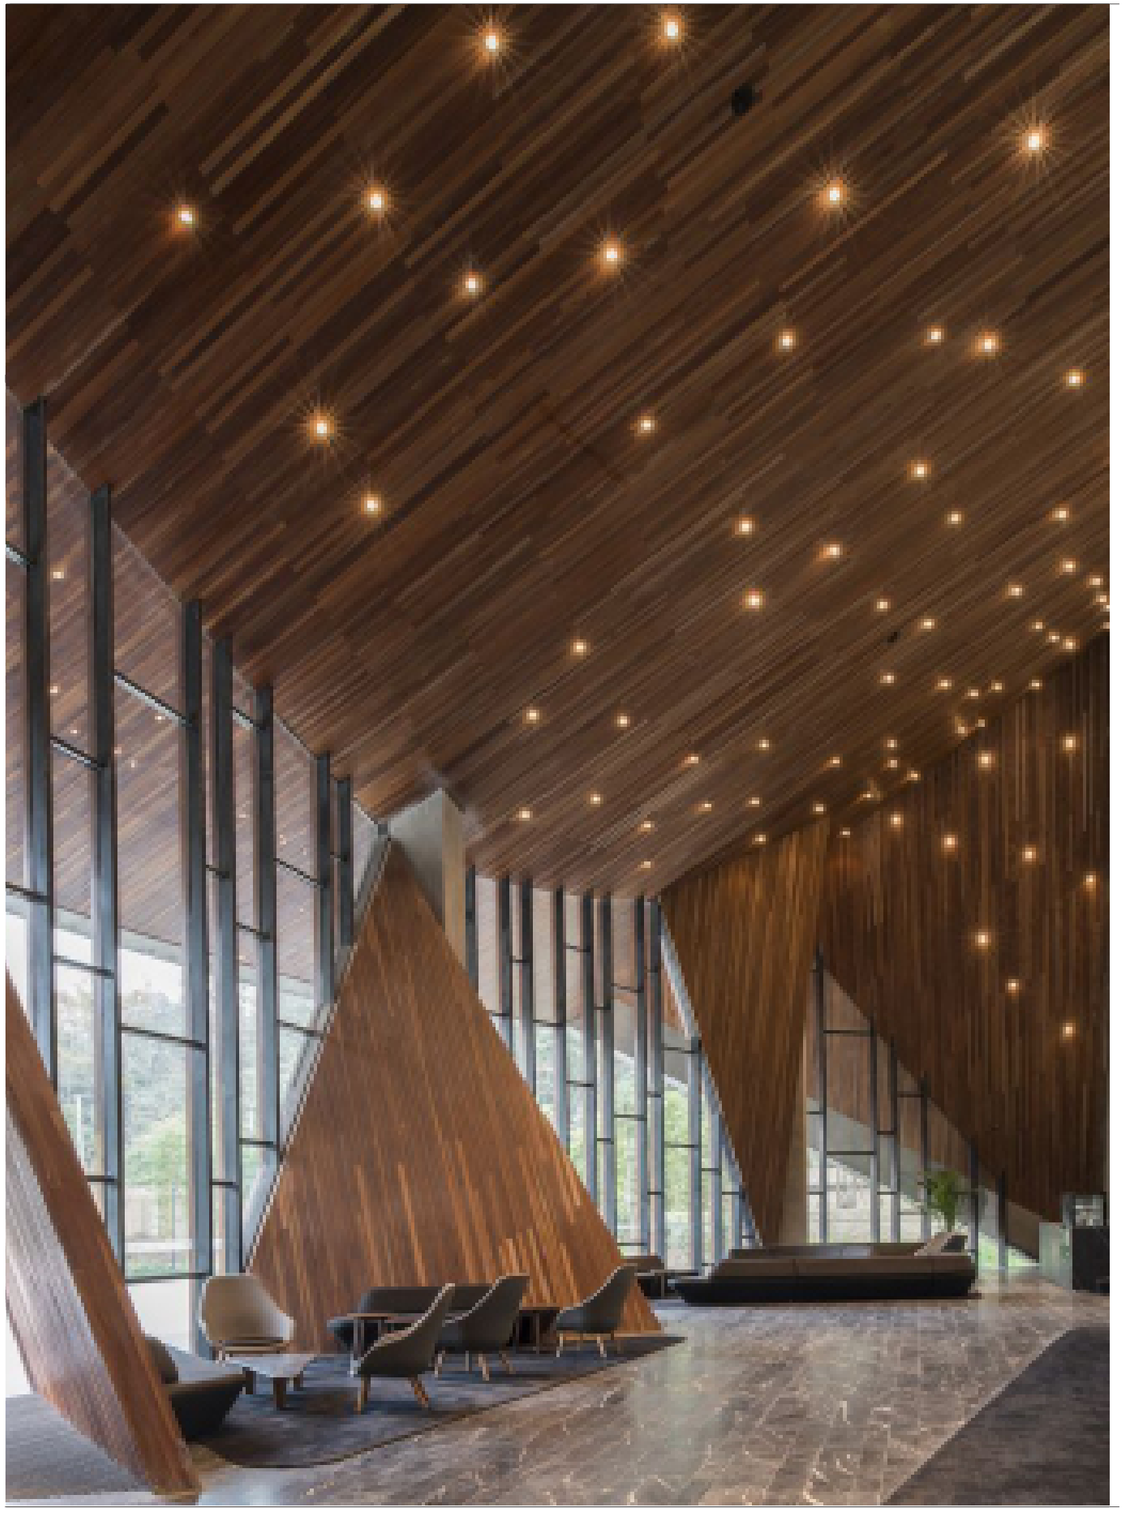


HDM
Deep Anti-Glare



UGR<11




Ø30mm Ø40mm Ø50mm Ø60mm

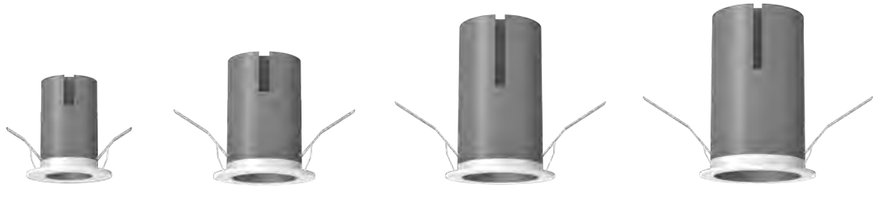

Ø30mm Ø40mm Ø50mm Ø60mm





HDM3007G

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	1W/3W/4W/5W/7W
Beam angle	24°/36°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	35	589
2	70	147
3	106	65
4	141	37

36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	229
2	117	57
3	175	25
4	234	14





HDM4010G

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	23	1266
2	46	316
3	69	141
4	91	7

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	24	1659
2	47	415
3	71	184
4	95	104

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	27	1166
2	54	291
3	81	130
4	109	73

24° 4000K



H(m)	D(cm)	Em(lux/klm)
1	30	983
2	60	246
3	89	109
4	119	61



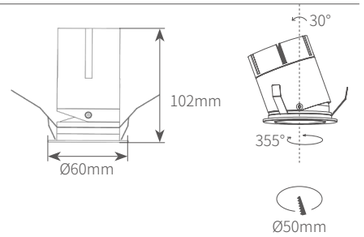

HDM5012G

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	4789
2	63	1197
3	95	532
4	526	299

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	45	2452
2	91	613
3	136	272
4	179	153

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	63	2190
2	126	547
3	189	243
4	951	137



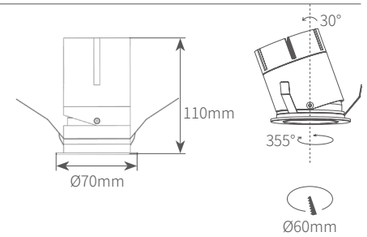

HDM6018G

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	15W/18W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3661
2	61	915
3	92	407
4	123	228

36° 4000K




H(m)	D(cm)	Em(lux/klm)
1	63	1438
2	125	359
3	188	160
4	251	90

24° 3000K



H(m)	D(cm)	Em(lux/klm)
1	39	2713
2	79	678
3	118	301
4	157	170





UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDM30F

Product information


Power	1W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	18	1503
2	37	376
3	55	167
4	73	94

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	35	589
2	70	147
3	106	65
4	141	37

36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	229
2	117	57
3	175	25
4	234	14





UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDM40F

Product information


Power	3W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	23	1266
2	46	316
3	69	141
4	91	7

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	24	1659
2	47	415
3	71	184
4	95	104

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	27	1166
2	54	291
3	81	130
4	109	73

24° 4000K



H(m)	D(cm)	Em(lux/klm)
1	30	983
2	60	246
3	89	109
4	119	61



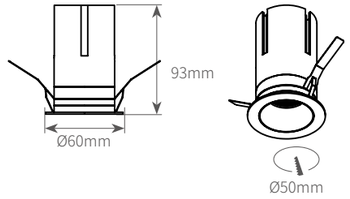

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDM50F

Product information


Power	5W
Beam angle	35°/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

35° 3000K




H(m)	D(cm)	Em(lux/klm)
1	56	1115
2	112	279
3	168	124
4	225	70

35° 4000K




H(m)	D(cm)	Em(lux/klm)
1	55	1180
2	111	295
3	166	131
4	221	73

45° 3000K




H(m)	D(cm)	Em(lux/klm)
1	84	488
2	169	122
3	253	54
4	338	31

45° 4000K



H(m)	D(cm)	Em(lux/klm)
1	86	510
2	171	127
3	257	57
4	342	32



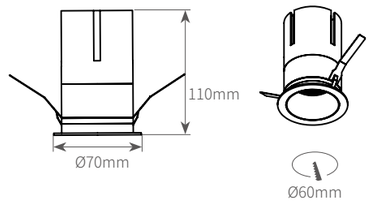

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

HDM60F

Product information


Power	7W
Beam angle	15°/24°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞80Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3661
2	61	915
3	92	407
4	123	228

36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	63	1438
2	125	359
3	188	160
4	251	90

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	39	2713
2	79	678
3	118	301
4	157	170

POKEMON RECESSED DOWNLIGHT SERIES







BDLH5510

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLH5510-TR

UGR<11 · Flicker free · IP20/IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLH7520

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20 W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLH7520-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	20 W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BDLH9530

Product information


Power	30 W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color



Dazzling black | Deep space black | Moonlight Silver | Linen silver | Ivory white | Metallic gold


Optional Accessories



honeycomb | Soft light optical diffuser

CE LVD GB





UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BDLH9530-TR

Product information


Power	30 W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color



Dazzling black | Deep space black | Moonlight Silver | Linen silver | Ivory white | Metallic gold


Optional Accessories



honeycomb | Soft light optical diffuser

CE LVD GB





UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BDLSH5510

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BDLSH5510-TR

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLSH7520

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLSH7520-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLSH9530

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser







BDLSH9530-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser







60*125mm

BDLSH1255520

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB · F





58*120mm

BDLSH1255520-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB · F







BDLSH1305520

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser







BDLSH1305520-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLSH1657540

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLSH1657540-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser









BDLSH1807540

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser









BDLSH1807540-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	46	10355
2	92	2045
3	139	845
4	185	648

36° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	65	5921
2	130	2631
3	195	483
4	260	370

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BDLSH2109560

Product information


Power	2*30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color



Dazzling black | Deep space black | Moonlight Silver | Linen silver | Ivory white | Metallic gold


Optional Accessories



honeycomb | Soft light optical diffuser

CE LVD GB





UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BDLSH2109560-TR

Product information


Power	2*30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color



Dazzling black | Deep space black | Moonlight Silver | Linen silver | Ivory white | Metallic gold


Optional Accessories



honeycomb | Soft light optical diffuser

CE LVD GB





112*223mm

BDLSH2259560

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser





112*223mm

BDLSH2259560-TR

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

24° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	46	12031
2	92	2376
3	139	1083
4	185	752

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories

honeycomb · Soft light optical diffuser

BULGARI RECESSED DOWNLIGHT SERIES





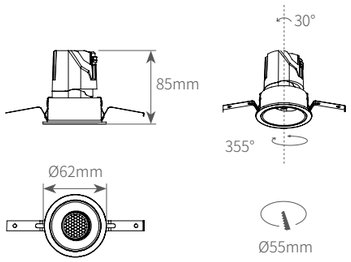

BDL5510

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL5510-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLS5510

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS5510-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	10W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





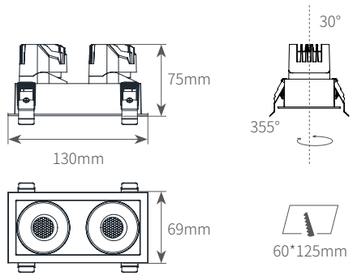

BDL1105520

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL1105520-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



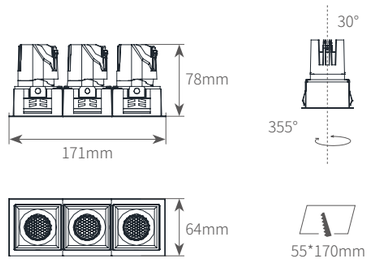

BDL1655530

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



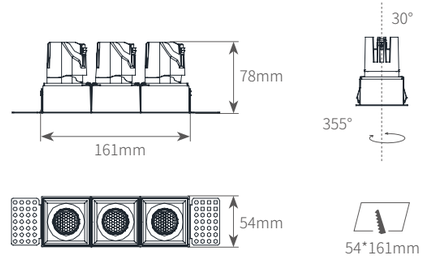

BDL1655530-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL11011040

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



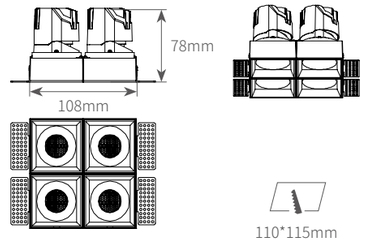

BDL11011040-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*10W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 7W




H(m)	D(cm)	Em(lux/klm)
1	36	1618
2	72	405
3	108	180
4	145	101

24° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	46	1319
2	92	330
3	139	147
4	185	82

36° 3000K 7W



H(m)	D(cm)	Em(lux/klm)
1	65	889
2	130	222
3	195	99
4	259	56

50° 4000K 7W



H(m)	D(cm)	Em(lux/klm)
1	85	647
2	171	162
3	256	72
4	341	40

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL7512

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7512-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL7512C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser

CE · LVD · GB





BDL7512D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser

CE · LVD · GB





BDL7512-TR-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser







BDL7512-TR-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58


Optional anti glare cover color

Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser





BDLS7512

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7512-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLS7512-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7512-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7512-E

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7512-TR-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLS7512-TR-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7512-TR-E

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	12W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7520

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7520-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL7520-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7520-TR-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7520C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser







BDL7520D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser







BDL7520-TR-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL7520-TR-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7520-TR-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7520-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7520-TR-C

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser

CE · LVD · GB





BDLS7520-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520-E

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520-D

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K · 1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee · 0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS7520-E

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K · 1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee · 0-10V · DALI · PLC

Product information


Power	20W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





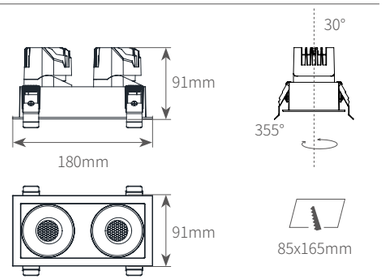

BDLS1507540

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS1507540-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





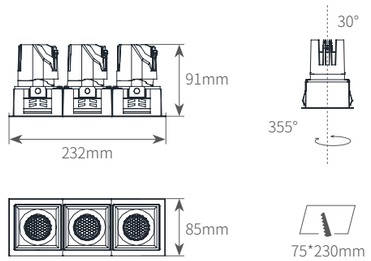

BDLS2257560

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





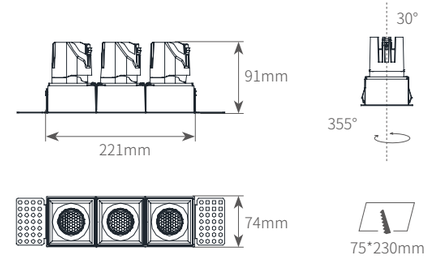

BDLS2257560-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS15015080

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





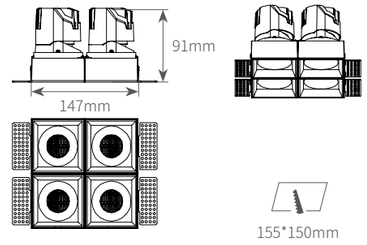

BDLS15015080-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*20W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞90Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	36	2607
2	72	652
3	108	290
4	145	163

24° 4000K 12W




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

50° 4000K 12W



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	379	58

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL9530

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL9530-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLS9530

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS9530-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/25°/35°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDL9535-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	35W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDL9535-TR-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	35W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser





BDLS9535-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS9535-TR-A

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	30W
Beam angle	15°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



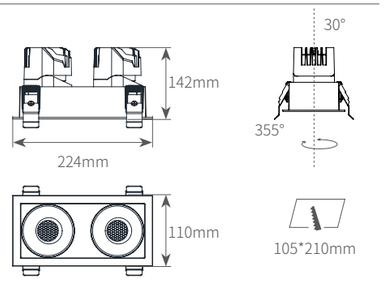

BDLS1909560

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS1909560-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	2*30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color




Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories



honeycomb · Soft light optical diffuser



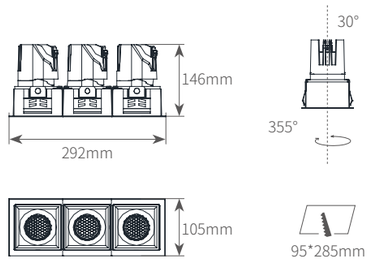

BDLS2859590

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser





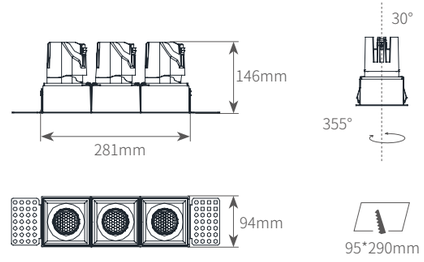

BDLS2859590-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	3*30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128

Optional anti glare cover color



Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold


Optional Accessories



honeycomb · Soft light optical diffuser







BDLS19191120

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*30W
Beam angle	18°/25°/36°/50°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128


Optional anti glare cover color

Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser



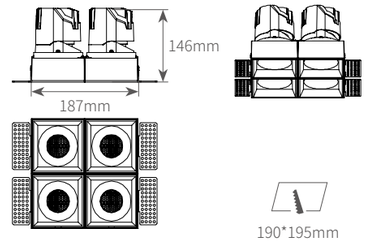

BDLS19191120-TR

UGR<11 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	4*30W
Beam angle	15°/24°/38°/60°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90/97
Finish color	Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	38	6461
2	76	1615
3	114	718
4	153	404

24° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	52	5033
2	103	1258
3	155	559
4	207	315

36° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	70	2989
2	140	747
3	209	332
4	279	187

50° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	93	2049
2	186	512
3	279	228
4	372	128


Optional anti glare cover color


Dazzling black · Deep space black · Moonlight Silver · Linen silver · Ivory white · Metallic gold

Optional Accessories

honeycomb · Soft light optical diffuser


DLC RECESSED DOWNLIGHT
SERIES





UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC02007

Product information


Power	7W
Beam angle	24°/36°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞95Lm/W
CRI	Ra＞90
Finish color	white/black

Product performation

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturtion	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	die-casting aluminum
Installation	Recessed


Light distribution parameters

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	54	1563
2	109	390
3	163	173
4	218	97

36° 4000K **20W**




H(m)	D(cm)	Em(lux/klm)
1	55	4507
2	113	1126
3	169	501
4	226	282

55° 4000K



H(m)	D(cm)	Em(lux/klm)
1	102	589
2	203	147
3	305	65
4	407	37





UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC02512

Product information


Power	12W
Beam angle	24°/36°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞95Lm/W
CRI	Ra＞90
Finish color	white/black

Mode Product performation

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturtion	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	die-casting aluminum
Installation	Recessed


Light distribution parameters

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	46	2214
2	92	554
3	139	246
4	186	138

36° 3000K




H(m)	D(cm)	Em(lux/klm)
1	61	1699
2	122	425
3	182	189
4	243	106

55° 4000K



H(m)	D(cm)	Em(lux/klm)
1	95	934
2	190	233
3	284	104
4	279	58







UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC035

Product information

Power	15/20W
Beam angle	24°/36°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞95Lm/W
CRI	Ra＞90
Finish color	white/black

Product performation


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturtion	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	die-casting aluminum
Installation	Recessed

Mode

DLC03515A-930XY DLC03515A-940XY	15W
DLC03520A-930XY DLC03520A-940XY	20W


Light distribution parameters

24° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	54	1563
2	109	390
3	163	173
4	218	97

36° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	75	2608
2	149	652
3	224	290
4	299	163

55° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	100	399
2	200	427
3	299	190
4	399	107



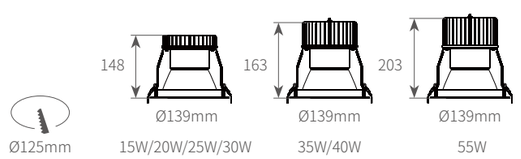

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC04-A

Product information


Power	15/20/25/30/35/40/55W
Beam angle	30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0415A-930XY DLC0415A-940XY	15W
DLC0420A-930XY DLC0420A-940XY	20W
DLC0425A-930XY DLC0425A-940XY	25W
DLC0430A-930XY DLC0430A-940XY	30W
DLC0435A-930XY DLC0435A-940XY	35W
DLC0440A-930XY DLC0440A-940XY	40W
DLC0455A-930XY DLC0455A-940XY	55W


Light distribution parameters

30° 3000K 15W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	55	3590
2	111	897
3	166	398
4	221	224

30° 3000K 20W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	55	4507
2	113	1126
3	169	501
4	226	282

30° 3000K 25W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	56	5301
2	113	1325
3	169	589
4	225	331

30° 3000K 30W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	55	6687
2	110	1671
3	165	743
4	221	417

30° 3000K 35W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	61	6935
2	122	1733
3	183	770
4	244	433

30° 3000K 40W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	61	7706
2	122	1926
3	183	856
4	244	481

30° 3000K 55W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	60	11612
2	119	2903
3	179	1290
4	239	725



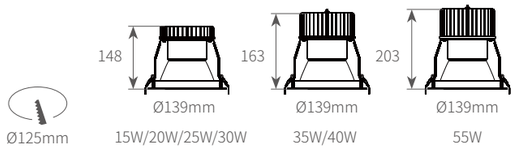

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC04-B

Product information


Power	15/20/25/30/35/40/55W
Beam angle	15°/24°/36°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0415B-930XY	15W	DLC0430B-930XY	30W	DLC0455B-930XY	55W
DLC0415B-940XY		DLC0430B-940XY		DLC0455B-940XY	
DLC0420B-930XY	20W	DLC0435B-930XY	35W		
DLC0420B-940XY		DLC0435B-940XY			
DLC0425B-930XY	25W	DLC0440B-930XY	40W		
DLC0425B-940XY		DLC0440B-940XY			


Light distribution parameters

24° 3000K 15W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	38	6172
2	77	1543
3	115	683
4	154	385

24° 3000K 20W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	38	8568
2	76	2142
3	113	952
4	151	535

24° 3000K 25W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	38	11385
2	77	2846
3	115	1265
4	153	711

24° 3000K 30W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	38	11950
2	76	2987
3	113	1327
4	151	746

24° 3000K 35W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	44	11653
2	88	2913
3	132	1294
4	176	728

24° 3000K 40W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	44	13198
2	88	3299
3	133	1466
4	177	824

24° 3000K 55W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	43	19724
2	86	4931
3	129	2191
4	171	1232



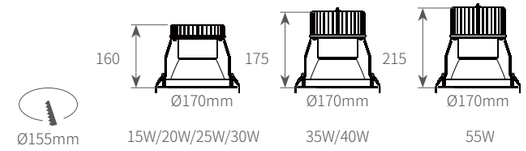

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC05-A

Product information


Power	15/20/25/30/35/40/55W
Beam angle	45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0515A-930XY	15W	DLC0530A-930XY	30W	DLC0555A-930XY	55W
DLC0515A-940XY		DLC0530A-940XY		DLC0555A-940XY	
DLC0520A-930XY	20W	DLC0535A-930XY	35W		
DLC0520A-940XY		DLC0535A-940XY			
DLC0525A-930XY	25W	DLC0540A-930XY	40W		
DLC0525A-940XY		DLC0540A-940XY			


Light distribution parameters

55° 3000K 15W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	78	2444
2	157	611
3	235	271
4	314	152

55° 3000K 20W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	79	3271
2	158	817
3	237	363
4	316	204

55° 3000K 25W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	79	3744
2	158	936
3	237	416
4	316	234

55° 3000K 30W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	79	3744
2	158	936
3	237	416
4	316	234

55° 3000K 35W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	82	5046
2	165	1261
3	247	560
4	329	315

55° 3000K 40W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	82	5710
2	165	1427
3	247	634
4	329	356

55° 3000K 55W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	82	7941
2	165	1985
3	247	882
4	329	496



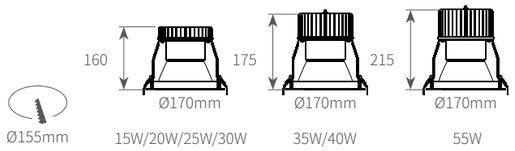

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC05-B

Product information


Power	15/20/25/30/35/40/55W
Beam angle	15°/24°/36°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞110Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0515B-930XY DLC0515B-940XY	15W	DLC0530B-930XY DLC0530B-940XY	30W	DLC0555B-930XY DLC0555B-940XY	55W
DLC0520B-930XY DLC0520B-940XY	20W	DLC0535B-930XY DLC0535B-940XY	35W		
DLC0525B-930XY DLC0525B-940XY	25W	DLC0540B-930XY DLC0540B-940XY	40W		


Light distribution parameters

55° 3000K 15W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	105	2157
2	209	539
3	314	239
4	418	134

55° 3000K 20W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	101	2996
2	201	749
3	302	332
4	402	187

55° 3000K 25W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	103	3694
2	207	923
3	310	410
4	414	230

55° 3000K 30W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	101	4021
2	201	1005
3	302	446
4	403	251

55° 3000K 35W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	100	5041
2	199	1260
3	299	560
4	398	315

55° 3000K 40W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	100	5543
2	199	1385
3	299	615
4	399	346

55° 3000K 55W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	100	5041
2	199	1260
3	299	560
4	398	315



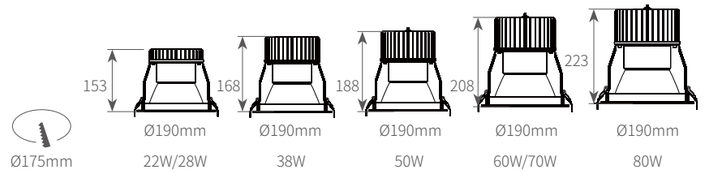

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

DLC06-A

Product information


Power	22W/28W/38W/50W/60W/70W/80W
Beam angle	30°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0622A-930XY DLC0622A-930XY	22W	DLC0650A-930XY DLC0650A-930XY	50W	DLC0680A-930XY DLC0680A-930XY	80W
DLC0628A-930XY DLC0628A-930XY	28W	DLC0660A-930XY DLC0660A-930XY	60W		
DLC0638A-930XY DLC0638A-930XY	38W	DLC0670A-930XY DLC0670A-930XY	70W		


Light distribution parameters

30° 3000K 22W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	46	5200
2	93	1300
3	139	570
4	185	320

30° 3000K 28W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	48	7460
2	95	1860
3	143	820
4	190	460

30° 3000K 38W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	50	9610
2	101	2400
3	151	1060
4	201	600

30° 3000K 50W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	51	12660
2	101	3160
3	152	1400
4	202	790

30° 3000K 60W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	51	14560
2	101	3640
3	152	1610
4	203	910

30° 3000K 70W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	52	13280
2	104	3320
3	157	830
4	209	530

30° 3000K 80W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	52	14550
2	104	3630
3	157	1010
4	209	660



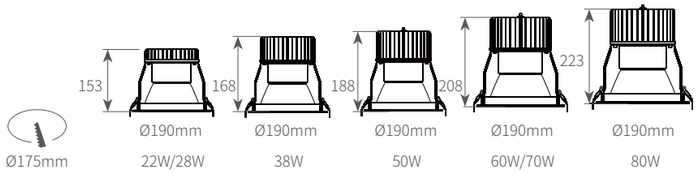

DLC06-B

UGR<17 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	22W/28W/38W/50W/60W/70W/80W
Beam angle	25°/32°/45°/50°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	>110Lm/W
CRI	Ra>90
Finish color	white/black

Mode

DLC0622B-930XY DLC0622B-940XY	22W	DLC0650B-930XY DLC0650B-940XY	50W	DLC0680B-930XY DLC0680B-930XY	80W
DLC0628B-930XY DLC0628B-940XY	28W	DLC0660B-930XY DLC0660B-940XY	60W		
DLC0638B-930XY DLC0638B-940XY	38W	DLC0670B-930XY DLC0670B-940XY	70W		


Light distribution parameters

50° 3000K 22W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	102	2640
2	203	660
3	305	290
4	407	160

50° 3000K 28W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	113	2850
2	226	710
3	339	310
4	452	170

50° 3000K 38W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	114	3840
2	228	960
3	341	420
4	455	240

50° 3000K 50W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	114	5060
2	228	1260
3	341	560
4	455	310

50° 3000K 60W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	114	5810
2	228	1450
3	341	640
4	455	360

50° 3000K 70W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	114	5340
2	227	1330
3	341	590
4	455	330

50° 3000K 80W CRI>80



H(m)	D(cm)	Em(lux/klm)
1	114	6984
2	227	1746
3	341	776
4	455	456



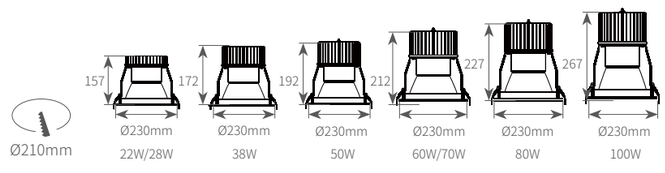

DLC08-A

UGR<17 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	>110Lm/W
CRI	Ra>90
Finish color	white/black

Mode

DLC0822A-930XY DLC0822A-940XY	22W	DLC0850A-930XY DLC0850A-940XY	50W	DLC0880A-930XY DLC0880A-940XY	80W
DLC0828A-930XY DLC0828A-940XY	28W	DLC0860A-930XY DLC0860A-940XY	60W	DLC08100A-930XY DLC08100A-940XY	100W
DLC0838A-930XY DLC0838A-940XY	38W	DLC0870A-930XY DLC0870A-940XY	70W		


Light distribution parameters

45° 3000K 22W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	80	2510
2	160	620
3	240	270
4	320	150

45° 3000K 28W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	80	3420
2	160	850
3	240	380
4	320	210

45° 3000K 38W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	81	4510
2	162	1120
3	242	500
4	323	280

45° 3000K 50W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	80	5880
2	161	1470
3	241	650
4	322	360

45° 3000K 60W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	80	6780
2	161	1690
3	241	750
4	321	420

45° 3000K 70W CRI>80




H(m)	D(cm)	Em(lux/klm)
1	80	7130
2	161	1780
3	241	790
4	322	440

45° 3000K 80W CRI>80



H(m)	D(cm)	Em(lux/klm)
1	80	10280
2	161	2570
3	241	1142
4	322	685



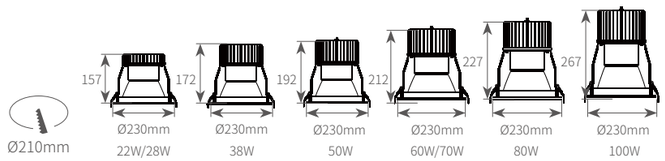

DLC08-B

UGR<17 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information

Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/36°/45°/55°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC0822B-930XY	22W	DLC0850B-930XY	50W	DLC0880B-930XY	80W
DLC0822B-940XY		DLC0850B-940XY		DLC0880B-940XY	
DLC0828B-930XY	28W	DLC0860B-930XY	60W	DLC08100B-930XY	100W
DLC0828B-940XY		DLC0860B-940XY		DLC08100B-940XY	
DLC0838B-930XY	38W	DLC0870B-930XY	70W		
DLC0838B-940XY		DLC0870B-940XY			

Light distribution parameters

55° 3000K 22W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	135	1990
2	269	490
3	404	220
4	538	120

55° 3000K 28W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	136	2410
2	271	600
3	407	260
4	543	150

55° 3000K 38W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	133	3530
2	267	880
3	400	390
4	534	220

55° 3000K 50W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	136	4440
2	271	1110
3	407	490
4	543	270

55° 3000K 60W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	136	5050
2	271	1260
3	407	560
4	543	310


55° 3000K 70W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	135	5590
2	270	1390
3	406	620
4	542	340

55° 3000K 80W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	135	6120
2	270	1510
3	406	640
4	542	350



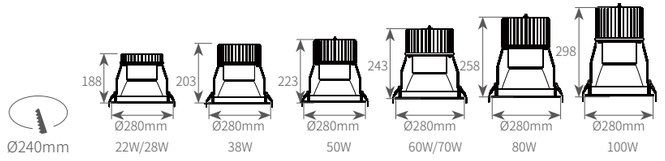

DLC10-A

UGR<17 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information

Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC1022A-930XY	22W	DLC1050A-930XY	50W	DLC1080A-930XY	80W
DLC1022A-940XY		DLC1050A-940XY		DLC1080A-940XY	
DLC1028A-930XY	28W	DLC1060A-930XY	60W	DLC10100A-930XY	100W
DLC1028A-940XY		DLC1060A-940XY		DLC10100A-940XY	
DLC1038A-930XY	38W	DLC1070A-930XY	70W		
DLC1038A-940XY		DLC1070A-940XY			

Light distribution parameters

36° 3000K 22W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	3380
2	134	840
3	201	370
4	268	210

36° 3000K 28W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	4290
2	133	1070
3	200	470
4	267	260

36° 3000K 38W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	5660
2	134	1410
3	201	620
4	267	350

36° 3000K 50W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	7790
2	134	1940
3	201	860
4	268	480

36° 3000K 60W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	9050
2	134	2260
3	201	1000
4	269	560


36° 3000K 70W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	9620
2	134	2400
3	201	1060
4	268	600

36° 3000K 80W CRI＞80

H(m)	D(cm)	Em(lux/klm)
1	67	10820
2	134	2610
3	201	1170
4	268	660



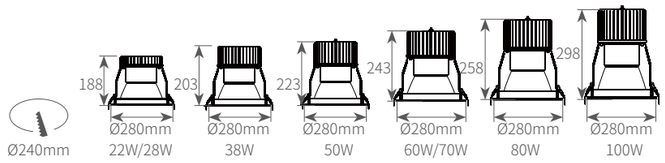

DLC10-B

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/32°/40°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC1022B-930XY	22W	DLC1050B-930XY	50W	DLC1080B-930XY	80W
DLC1022B-940XY		DLC1050B-940XY		DLC1080B-940XY	
DLC1028B-930XY	28W	DLC1060B-930XY	60W	DLC10100B-930XY	100W
DLC1028B-940XY		DLC1060B-940XY		DLC10100B-940XY	
DLC1038B-930XY	38W	DLC1070B-930XY	70W		
DLC1038B-940XY		DLC1070B-940XY			


Light distribution parameters

40° 3000K 22W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	75	3490
2	150	870
3	225	380
4	300	210

40° 3000K 28W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	72	4610
2	143	1150
3	215	510
4	287	280

40° 3000K 38W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	71	6370
2	141	1590
3	212	700
4	283	390

40° 3000K 50W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	71	8490
2	142	2120
3	213	940
4	284	530

40° 3000K 60W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	71	9540
2	142	2380
3	213	1060
4	284	590

40° 3000K 70W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	78	9070
2	157	2260
3	235	1000
4	313	560

40° 3000K 80W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	78	9370
2	157	2260
3	235	1000
4	313	560


40° 3000K 100W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	78	11676
2	157	2712
3	235	1200
4	313	672





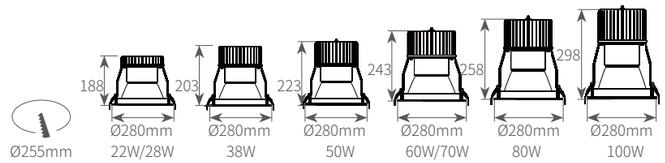

DLC10-D

UGR<17 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	22W/28W/38W/50W/60W/70W/80W/100W
Beam angle	25°/45°/80°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞110Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

DLC1022D-930XY	22W	DLC1050D-930XY	50W	DLC1080D-930XY	80W
DLC1022D-940XY		DLC1050D-940XY		DLC1080D-940XY	
DLC1028D-930XY	28W	DLC1060D-930XY	60W	DLC10100D-930XY	100W
DLC1028D-940XY		DLC1060D-940XY		DLC10100D-940XY	
DLC1038D-930XY	38W	DLC1070D-930XY	70W		
DLC1038D-940XY		DLC1070D-940XY			


Light distribution parameters

45° 3000K 22W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	88	2690
2	175	730
3	263	320
4	351	180

45° 3000K 28W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	84	3740
2	168	960
3	253	410
4	337	230

45° 3000K 38W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	92	4720
2	183	1180
3	275	520
4	367	290

45° 3000K 50W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	90	6380
2	181	1590
3	271	700
4	362	390

45° 3000K 60W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	90	7260
2	181	1810
3	271	800
4	362	450

45° 3000K 70W CRI＞80




H(m)	D(cm)	Em(lux/klm)
1	102	7730
2	204	1930
3	305	850
4	407	480

45° 3000K 80W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	102	7730
2	204	1930
3	305	850
4	407	480


45° 3000K 100W CRI＞80



H(m)	D(cm)	Em(lux/klm)
1	102	9662
2	204	2412
3	305	1020
4	407	600

DLD RECESSED DOWNLIGHT SERIES





DLD04-A

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0~10V
DALI
PLC


Product information

Power	16W/20W/25W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0416A-930XY	16W
DLD0416A-940XY	
DLD0420A-930XY	20W
DLD0420A-940XY	
DLD0425A-930XY	25W
DLD0425A-940XY	


Light distribution parameters



16W 87°3000K CRI>80




20W 87°3000K CRI>80



25W 87°3000K CRI>80





DLD04-B

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0~10V
DALI
PLC


Product information

Power	16W/20W/25W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0416B-930XY	16W
DLD0416B-940XY	
DLD0420B-930XY	20W
DLD0420B-940XY	
DLD0425B-930XY	25W
DLD0425B-940XY	


Light distribution parameters



16W 84°3000K CRI>80




20W 84°3000K CRI>80



25W 84°3000K CRI>80





15W/20W/25W

DLD04-C

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	15W/20W/25W
Beam angle	27°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0415C-930XY	15W
DLD0415C-940XY	
DLD0420C-930XY	20W
DLD0420C-940XY	
DLD0425C-930XY	25W
DLD0425C-940XY	


Light distribution parameters



15W 27°3000K CRI>80




20W 27°3000K CRI>80



25W 27°3000K CRI>80





18W/25W/32W

DLD06-A

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	18W/25W/32W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0618A-930XY	18W
DLD0618A-940XY	
DLD0625A-930XY	25W
DLD0625A-940XY	
DLD0632A-930XY	32W
DLD0632A-940XY	


Light distribution parameters



18W 87°3000K CRI>80




25W 87°3000K CRI>80



32W 87°3000K CRI>80





18W/25W/32W

DLD06-B

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	18W/25W/32W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0618B-930XY	18W
DLD0618B-940XY	
DLD0625B-930XY	25W
DLD0625B-940XY	
DLD0632B-930XY	32W
DLD0632B-940XY	


Light distribution parameters



18W 84°3000K CRI>80




25W 84°3000K CRI>80



32W 84°3000K CRI>80





25W/35W

DLD06-C

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	25W/35W
Beam angle	27°/45°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0625C-930XY	25W
DLD0625C-940XY	
DLD0635C-930XY	35W
DLD0635C-940XY	

Light distribution parameters




25W 45°3000K CRI>80



35W 45°3000K CRI>80





25W/32W/45W

DLD08-A

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	25W/32W/45W
Beam angle	87°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0825A-930XY	25W
DLD0825A-940XY	
DLD0832A-930XY	32W
DLD0832A-940XY	
DLD0845A-930XY	45W
DLD0845A-940XY	


Light distribution parameters



25W 87°3000K CRI>80




32W 87°3000K CRI>80



45W 87°3000K CRI>80





25W/32W/45W

DLD08-B

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	25W/32W/45W
Beam angle	84°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0825B-930XY	25W
DLD0825B-940XY	
DLD0832B-930XY	32W
DLD0832B-940XY	
DLD0845B-930XY	45W
DLD0845B-940XY	


Light distribution parameters



25W 84°3000K CRI>80




32W 84°3000K CRI>80



45W 84°3000K CRI>80





25W/35W/50W/55W

DLD08-C

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	25W/35W/50W/55W
Beam angle	27°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLD0825C-930XY	25W	DLD0850C-930XY	50W
DLD0825C-940XY		DLD0850C-940XY	
DLD0835C-930XY	35W	DLD0855C-930XY	55W
DLD0835C-940XY		DLD0855C-940XY	


Light distribution parameters




25W 27°3000K CRI>80



35W 27°3000K CRI>80




50W 27°3000K CRI>80



55W 27°3000K CRI>80





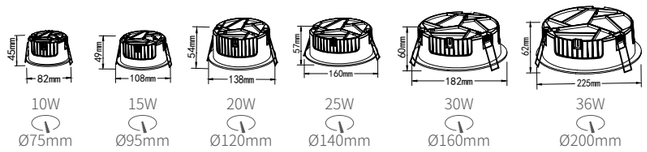

10W Ø75mm | 15W Ø95mm | 20W Ø120mm | 25W Ø140mm | 30W Ø160mm | 36W Ø200mm

DLE07510/09515/12020/14025/16030/20036

Product information

Power	10W/15W/20W/25W/30W/36W
Beam angle	50°/60° 60°/75° 60°/80° 60°/80° 60°/85° 60°/95°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee


0-10V DALI PLC

Mode

DLE07510-930XY	10W	DLE14025-930XY	25W
DLE07510-940XY		DLE14025-940XY	
DLE09515-930XY	15W	DLE16030-930XY	30W
DLE09515-940XY		DLE16030-940XY	
DLE12020-930XY	20W	DLE20036-930XY	36W
DLE12020-940XY		DLE20036-940XY	


Light distribution parameters

50° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	103	874
2	207	220
3	310	100
4	413	55

60° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	110	1510
2	220	377
3	330	168
4	440	95

60° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	113	1768
2	225	443
3	338	197
4	450	110

60° 4000K 25W




H(m)	D(cm)	Em(lux/klm)
1	175	1770
2	350	443
3	525	197
4	701	111

85° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	183	2141
2	367	536
3	550	238
4	733	134

85° 4000K 36W




H(m)	D(cm)	Em(lux/klm)
1	208	2570
2	415	643
3	623	286
4	830	161








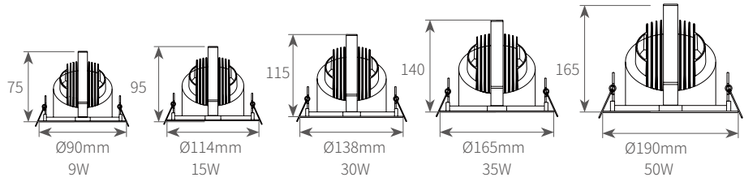



Ø75/100/130/155/175mm

DLG




Product information

Power	9W/15W/30W/35W/50W
Beam angle	15°/24°/38°/45°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞110Lm/W
CRI	Ra＞90
Finish color	white/black


Mode

DLG7509-C930XY	9W	DLG13030-C930XY	30W
DLG7509-C940XY		DLG13030-C940XY	
DLG10015-C930XY	15W	DLG155-C930XY	35W
DLG10015-C940XY		DLG155-C940XY	
		DLG17550	50W


Light distribution parameters




9W 24°3000K CRI>80

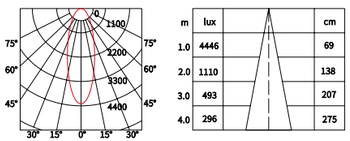

15W 24°3000K CRI>80

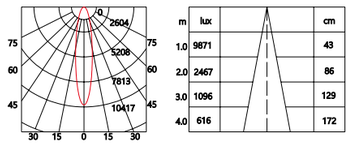


30W 24°3000K CRI>80



40W 24°3000K CRI>80


SURFACE MOUNTED
DOWNLIGHT SERIES



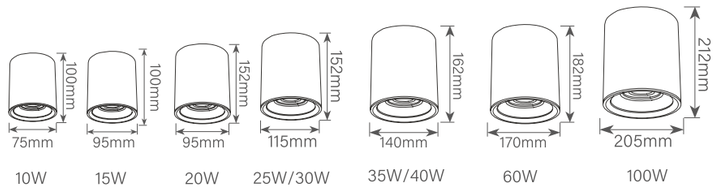

SMR7510/9515/9520/11530/14050/17060/205100

UGR < 19 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI


Product information

Power	10W/15W/20W/25W/30W/35W/40W/60W/100W
Beam angle	20°/40°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black
IP	65

Mode


SMR7510	10W/15W
SMR7515	
SMR9515	15W/20W
SMR9520	
SMR11525	25W/30W
SMR11530	
SMR14035	35W/40W
SMR14040	
SMR17060	60W
SMR0205100	100W

Light distribution parameters

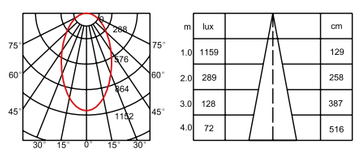


m	lux	cm
1.0	1159	129
2.0	289	258
3.0	128	387
4.0	72	516

15W 70°3000K CRI>80

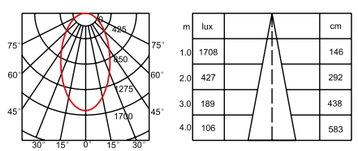

m	lux	cm
1.0	1708	146
2.0	427	292
3.0	189	438
4.0	106	583

25W 70°3000K CRI>80

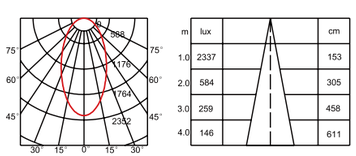


m	lux	cm
1.0	2337	153
2.0	584	305
3.0	259	458
4.0	146	611

35W 70°3000K CRI>80







UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

GMR72/GMR90/GMR111

Product information


Power	10W/15W/20W/25W
Beam angle	15°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black

Mode

SMR0210-C930	10W
SMR0210-C940	
SMR0315-C940	15W
SMR0315-C930	
SMR0420-C940	20W
SMR0420-C930	
SMR0525-C940	25W
SMR0525-C930	


Light distribution parameters

Light distribution parameters

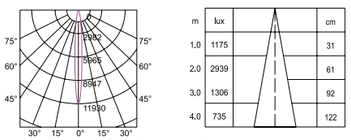


m	lux	cm
1,0	1175	31
2,0	2939	61
3,0	1306	92
4,0	735	122

15W Beam Angle=15°

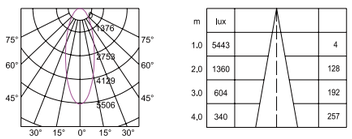

m	lux	cm
1.0	5443	4
2,0	1360	128
3.0	604	192
4,0	340	257


15W Beam Angle=36°

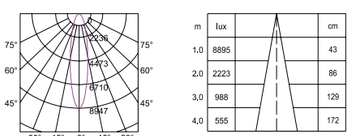

m	lux	cm
1.0	8895	43
2,0	2223	86
3,0	988	129
4,0	555	172

15W Beam Angle=24°





UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC


GMS72/GMS90/GMS111

Product information

Power	10W/15W/20W/25W
Beam angle	15°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black


SMR0210-C930	10W
SMR0210-C940	
SMR0315-C940	15W
SMR0315-C930	
SMR0420-C940	20W
SMR0420-C930	
SMR0525-C940	25W
SMR0525-C930	

Light distribution parameters

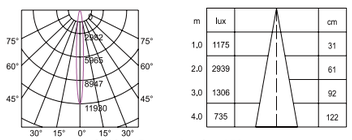


m	lux	cm
1.0	1175	31
2.0	2939	61
3,0	1306	92
4.0	735	122

15W Beam Angle=15°

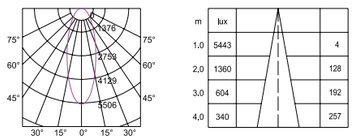

m	lux	cm
1.0	5443	4
2,0	1360	128
3.0	604	192
4,0	340	257

15W Beam Angle=36°

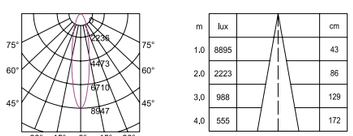


m	lux	cm
1.0	8895	43
2.0	2223	86
3,0	988	129
4,0	555	172

15W Beam Angle=24°





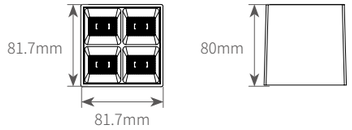

BLD0415

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	15W
Beam angle	12°/23°/38°/50°/24°*77°/38*77°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

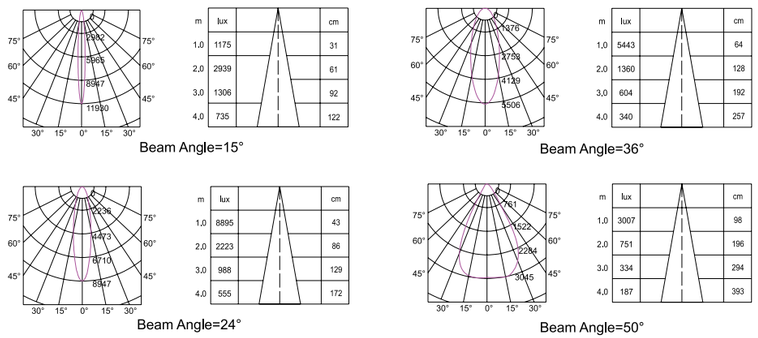



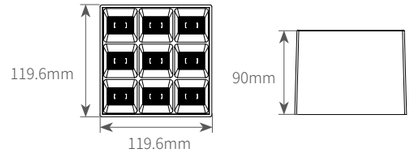

BLD0936

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	36W
Beam angle	12°/23°/38°/50°/24°*77°/38*77°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted

Light distribution parameters

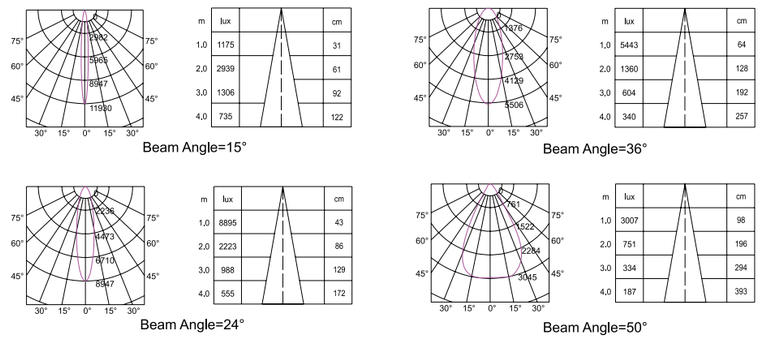





BLD0510/BLD1020/BLD1530

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	10W/20W/30W
Beam angle	15°/30°/45°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters




Beam Angle=15°



Beam Angle=36°




Beam Angle=24°

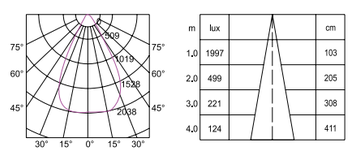

Beam Angle=50°







Pearl Chandelier
RP8005

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	**5W**
Beam angle	75°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	rose gold / Pearl black/Chrome

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

75° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17


75° 4000K



H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18





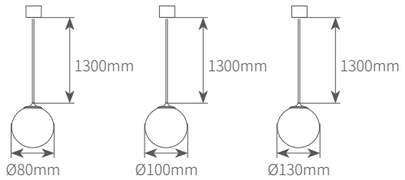

Meteorite Pendant Bulb
RP8002/RP1004/RP13006

Flicker free

IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	**2W/4W/6W**
Beam angle	220°
Input voltage	AC220-240V
Input frequency	50/60hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Cloud white

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Glass
Installation	Surface Mounted


Light distribution parameters

220° 3000K



H(m)	D(cm)	Em(lux/klm)
1	NA	82
2	NA	21
3	NA	9
4	NA	5

220° 4000K




H(m)	D(cm)	Em(lux/klm)
1	NA	85
2	NA	21
3	NA	9
4	NA	5







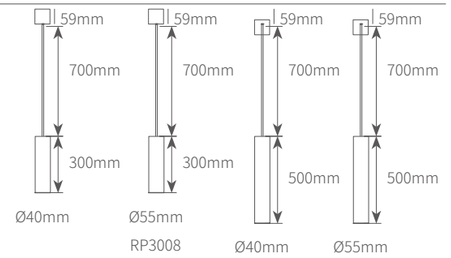

Cylinder Pendant Lamp
RP553008/RP555015/RP403008/RP405015

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee


0~10V · DALI · PLC

Product information

Power	**8W/15W**
Beam angle	15°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60hz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	White/black/brown/grey/green/red/blue


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted




Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	36	3173
2	72	793
3	108	353
4	144	198

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	39	4029
2	77	1007
3	116	448
4	193	252

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	46	2478
2	92	590
3	138	275
4	184	155

30° 4000K




H(m)	D(cm)	Em(lux/klm)
1	45	3151
2	90	788
3	135	350
4	180	197

36° 3000K




H(m)	D(cm)	Em(lux/klm)
1	65	1475
2	129	368
3	194	164
4	258	92

36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	61	1942
2	123	486
3	184	216
4	245	121



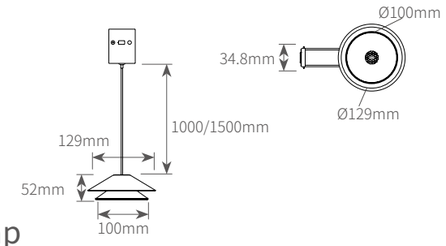

Lumina Pendant Lamp
RP1005

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**5W**
Beam angle	24°
Input voltage	AC220-240V
Input frequency	50-60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Red/white/black/brown/grey

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color







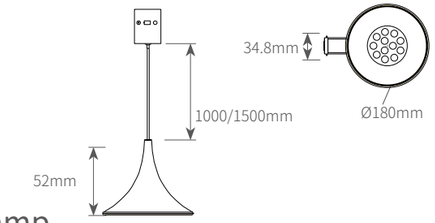

Crimson Pendant Lamp
RP1806

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**6W**
Beam angle	15°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Red/brown/marbled white/marbled black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

24° 4000K 15W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Color







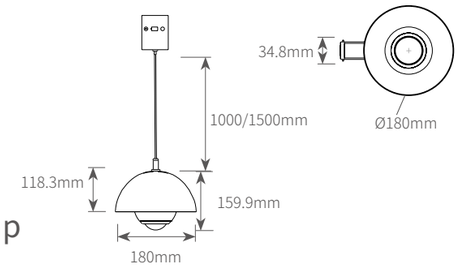

Ember Pendant Lamp
RP1807

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**7W**
Beam angle	36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	White/grey

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color







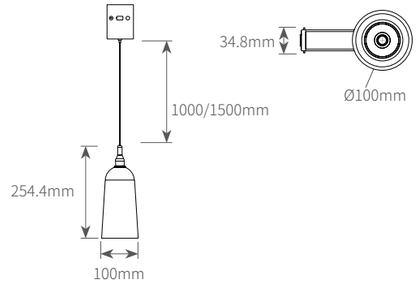

Eos Pendant Lamp
RP6505

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**5W**
Beam angle	24°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Grey/brown

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color







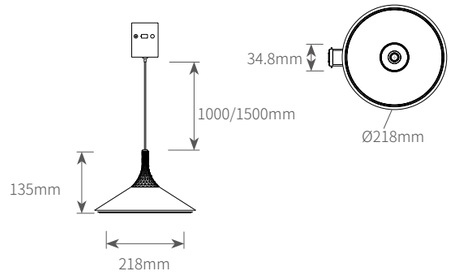

Aura Pendant Lamp
RP21805

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**5W**
Beam angle	24°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Grey/brown

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color







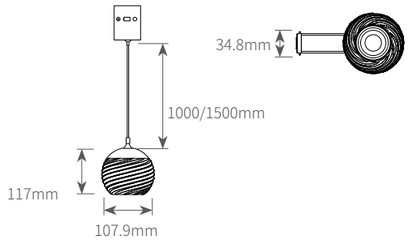

Neo Pendant Lamp
RP1106

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**6W**
Beam angle	15°-60°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	28	1594
2	57	398
3	85	177
4	114	100

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	61	655
2	123	164
3	184	73
4	246	41

60° 3000K




H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17





AR111 & GRILLE LIGHT SERIES





AR111-A

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC/DC 12V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	Silver


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf⩾92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	G53


Light distribution parameters



10W 30°3000K CRI>90




12W 30°3000K CRI>90



16W 30°3000K CRI>90





AR111-B

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	Silver


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf⩾92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters



10W 30°3000K CRI>90




12W 30°3000K CRI>90



16W 30°3000K CRI>90



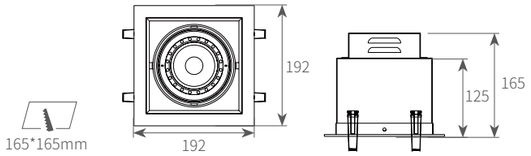

AR02-1

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC


Product information

Power	10W/12W/16W
Beam angle	15°/30°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters



10W 30°3000K CRI>90




12W 30°3000K CRI>90



16W 30°3000K CRI>90



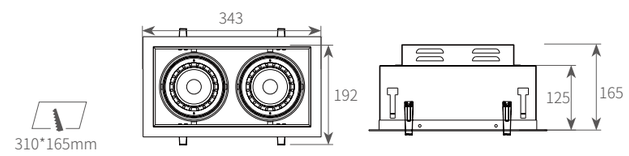

AR02-2

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC


Product information

Power	10W*2/12W*2/16W*2
Beam angle	15°/30°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters



2*10W 30°3000K CRI>90

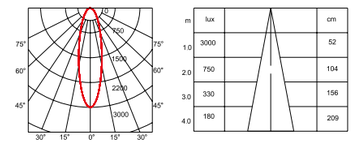


2*12W 30°3000K CRI>90



2*16W 30°3000K CRI>90



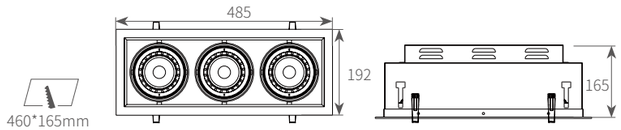

AR02-3

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC


Product information

Power	10W*3/12W*3/16W*3
Beam angle	15°/30°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters



3*10W 30°3000K CRI>90




3*12W 30°3000K CRI>90



3*16W 30°3000K CRI>90



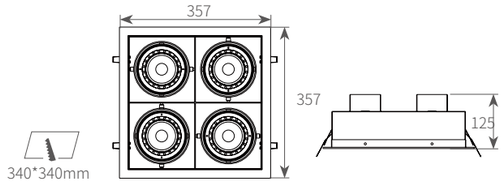

AR02-4

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC


Product information

Power	10W*4/12W*4/16W*4
Beam angle	15°/30°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120Lm/W
CRI	Ra＞90
Finish color	white/black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters



10W*4 30°3000K CRI>90




12W*4 30°3000K CRI>90



16W*4 30°3000K CRI>90


LED TRACK
LIGHT SERIES



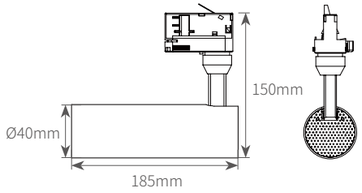

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

RT4005

Product information

Power	**5W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

36° 3000K 8W

H(m)	D(cm)	Em(lux/klm)
1	72	1075
2	144	268
3	216	119
4	288	67

36° 3000K 12W


H(m)	D(cm)	Em(lux/klm)
1	70	1669
2	141	417
3	211	185
4	282	104

36° 3000K 15W

H(m)	D(cm)	Em(lux/klm)
1	71	1900
2	141	475
3	212	211
4	282	118





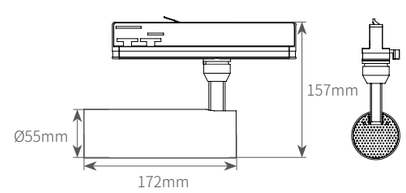

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

RT55-BL

Product information

Power	**8W/12W/15W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

36° 3000K 8W

H(m)	D(cm)	Em(lux/klm)
1	72	1075
2	144	268
3	216	119
4	288	67

36° 3000K 12W


H(m)	D(cm)	Em(lux/klm)
1	70	1669
2	141	417
3	211	185
4	282	104

36° 3000K 15W

H(m)	D(cm)	Em(lux/klm)
1	71	1900
2	141	475
3	212	211
4	282	118





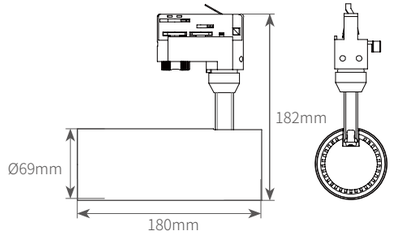

RT69-AL/RT69-AD

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**20W/25W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1220
2	145	300
3	217	130
4	290	70

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	72	2010
2	144	500
3	216	220
4	288	120


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	72	2450
2	144	610
3	216	270
4	288	150





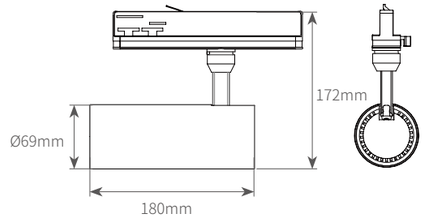

RT69-BL/RT69-BD

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**20W/25W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1220
2	145	300
3	217	130
4	290	70

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	72	2010
2	144	500
3	216	220
4	288	120


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	72	2450
2	144	610
3	216	270
4	288	150





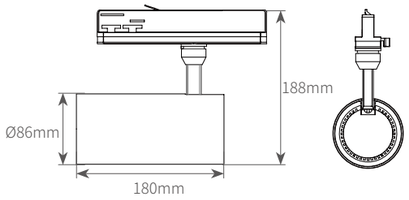

RT86-BL/RT86-BD

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**30W/35W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	37	12776
2	75	3194
3	112	1420
4	149	799

24° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	51	8440
2	103	2110
3	154	938
4	206	528


36° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	75	5267
2	150	1317
3	224	585





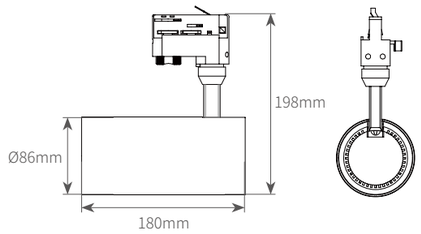

RT86-AL/RT86-AD

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**30W/35W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	37	12776
2	75	3194
3	112	1420
4	149	799

24° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	51	8440
2	103	2110
3	154	938
4	206	528


36° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	75	5267
2	150	1317
3	224	585
4	299	329







RT95

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	**30W/35W/40W**
Beam angle	15°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters




m	lux	cm
1.0	8047	52
2.0	2011	104
3.0	894	156
4.0	536	208

30W 24°3000K CRI＞80

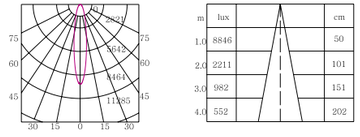

m	lux	cm
1.0	8846	50
2.0	2211	101
3.0	982	151
4.0	552	202

35W 24°3000K CRI＞80




m	lux	cm
1.0	17246	50
2.0	4311	101
3.0	1916	151
4.0	1077	202

40W 24°3000K CRI＞80



Anti-glare accessoires

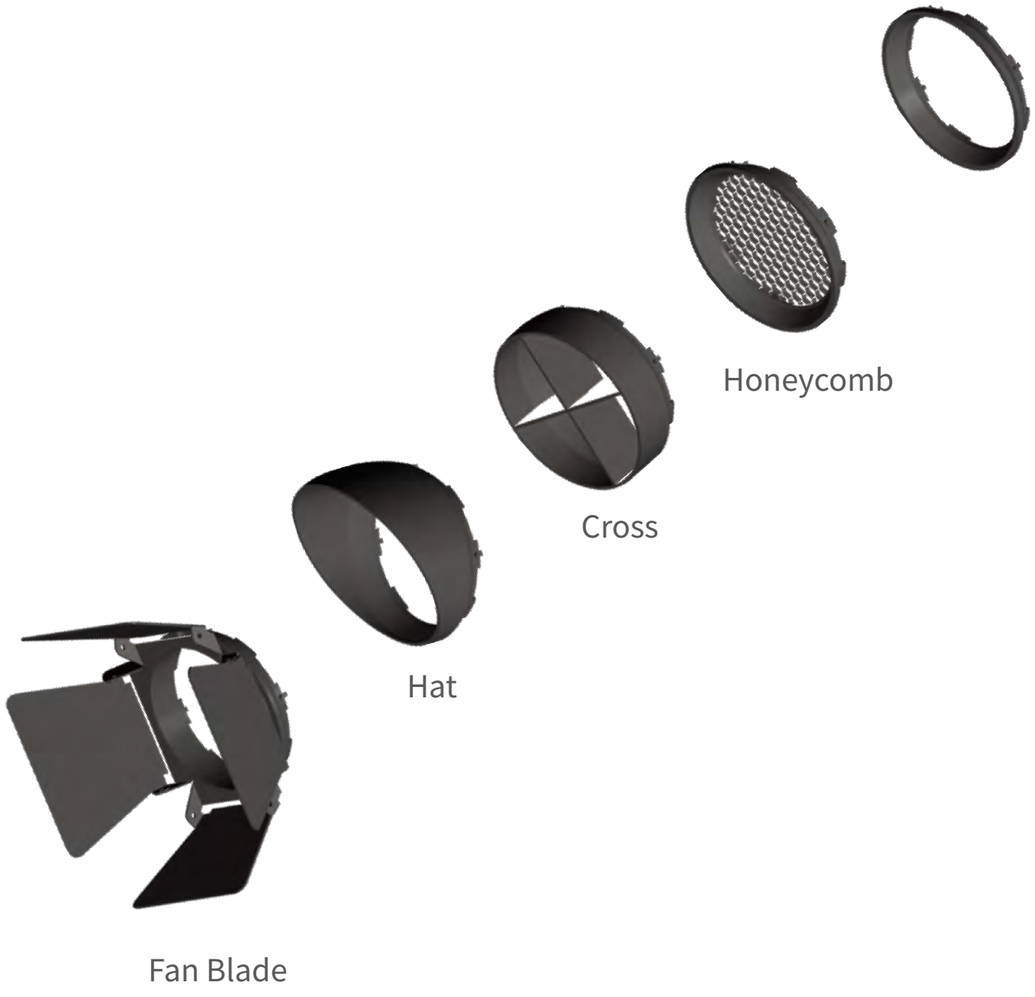


Honeycomb

Cross

Hat

Fan Blade





RT105-A

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	**30W/35W/45W/56W**
Beam angle	12°/24°/40°/60°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

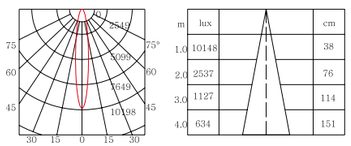


30W 24°3000K CRI＞90



35W 24°3000K CRI＞90

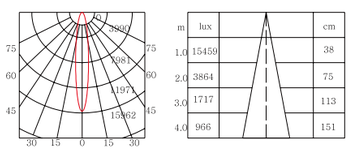


45W 24°3000K CRI＞90



56W 40°3000K CRI＞90



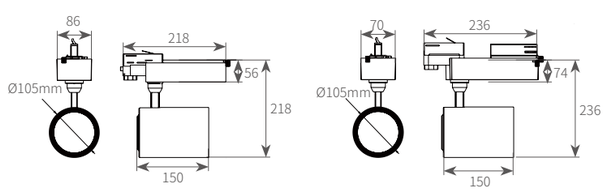

RT105-B

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


Product information

Power	**30W/35W/45W/56W**
Beam angle	12°/24°/40°/60°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




30W 24°3000K CRI＞90

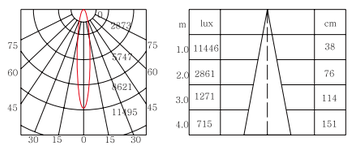

35W 24°3000K CRI＞90

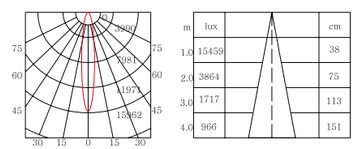


45W 24°3000K CRI＞90



56W 40°3000K CRI＞90



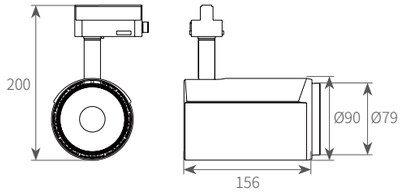

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

RT90


Product information

Power	**20W/25W/30W/35W**
Beam angle	12°/24°/36°/60°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




20W 36°3000K CRI>90

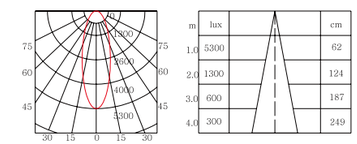

25W 36°3000K CRI>90




30W 36°3000K CRI>90

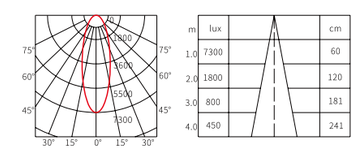

35W 36°3000K CRI>90





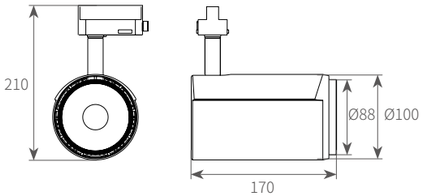

UGR < 19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

RT100


Product information

Power	**40W/45W**
Beam angle	15°/24°/36°/60°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

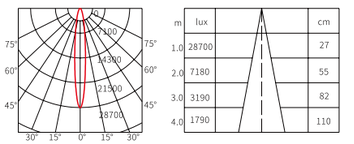


40W 15°3000K CRI>90

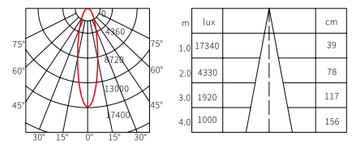

40W 24°3000K CRI>90

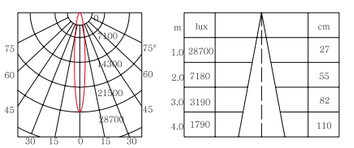

45W 15°3000K CRI>90

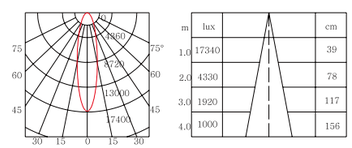


45W 24°3000K CRI>90




10°
55°
10°
25°
35°
55°





RZ55

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information

Power	**8W/12W/15W**
Beam angle	10°~55°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞90lm/W
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15° 3000K 15W

H(m)	D(cm)	Em(lux/klm)
1	47	4327
2	94	1082
3	140	481
4	187	271

55° 3000K 15W

H(m)	D(cm)	Em(lux/klm)
1	224	1133
2	248	284
3	372	126
4	496	71


15° 4000K 15W

H(m)	D(cm)	Em(lux/klm)
1	41	5260
2	82	1315
3	123	585
4	164	329

55° 4000K 15W

H(m)	D(cm)	Em(lux/klm)
1	118	1255
2	237	314
3	355	140
4	473	79





RZ65

UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information

Power	**15W/20W**
Beam angle	10°~55°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15° 3000K 20W

H(m)	D(cm)	Em(lux/klm)
1	37	10798
2	74	2700
3	111	1200
4	147	675

55° 3000K 15W

H(m)	D(cm)	Em(lux/klm)
1	103	2298
2	206	575
3	309	255
4	413	143


15° 4000K 20W

H(m)	D(cm)	Em(lux/klm)
1	37	11433
2	74	2858
3	112	1270
4	149	715

55° 4000K 15W

H(m)	D(cm)	Em(lux/klm)
1	103	2475
2	206	619
3	309	275
4	412	155





UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

RZ75

Product information


Power	**25W/30W**
Beam angle	10°~55°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	46	4327
2	91	1082
3	137	481
4	182	271

55° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	105	3019
2	210	755
3	315	336
4	451	189

15° 4000K 30W




H(m)	D(cm)	Em(lux/klm)
1	46	11224
2	92	2806
3	139	1247
4	185	701

55° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	106	3150
2	211	787
3	317	350
4	423	197





UGR<11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

RZ85

Product information


Power	**30W/35W**
Beam angle	10°~55°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 35 W




H(m)	D(cm)	Em(lux/klm)
1	40	14620
2	80	3655
3	120	1624
4	160	913

55° 3000K 15W




H(m)	D(cm)	Em(lux/klm)
1	118	2776
2	237	694
3	355	308
4	473	174

15° 4000K 35W




H(m)	D(cm)	Em(lux/klm)
1	40	14570
2	80	3643
3	120	1619
4	160	911

55° 4000K 15W



H(m)	D(cm)	Em(lux/klm)
1	115	2865
2	251	716
3	346	318
4	461	180





RZ95

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**35W/40W**
Beam angle	10°~55°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 40W




H(m)	D(cm)	Em(lux/klm)
1	31	25461
2	62	6365
3	93	2829
4	124	1592

55° 3000K 40W




H(m)	D(cm)	Em(lux/klm)
1	101	4865
2	202	1216
3	304	541
4	405	304

15° 4000K 40W



H(m)	D(cm)	Em(lux/klm)
1	31	25770
2	62	6443
3	93	2863
4	124	1611

55° 4000K 40W




H(m)	D(cm)	Em(lux/klm)
1	102	4999
2	204	1250
3	306	555
4	408	312









RC40

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**5W/8W**
Beam angle	12°/24°/36°
Input voltage	AC100-240
Input frequency	16Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	31	4053
2	62	1013
3	93	450
4	123	253

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	41	2683
2	82	671
3	123	218
4	164	168

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	176	163
4	235	91


36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	1658
2	116	415
3	174	184
4	232	103







RC55

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**8W/15W**
Beam angle	12°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1075
2	144	268
3	216	119
4	288	67

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	70	1669
2	141	417
3	211	185
4	282	104


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	71	1900
2	141	475
3	212	211
4	282	118







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

RC69

Product information


Power	**8W/15W/20W/25W**
Beam angle	12°/24°/36°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1220
2	145	300
3	217	130
4	290	70

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	72	2010
2	144	500
3	216	220
4	288	120


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	72	2450
2	144	610
3	216	270
4	288	150







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

RC86

Product information


Power	**30W/35W**
Beam angle	12°/24°/36°/60°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed


Light distribution parameters

15° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	37	12776
2	75	3194
3	112	1420
4	149	799

24° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	51	8440
2	103	2110
3	154	938
4	206	528

36° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	75	5267
2	150	1317
3	224	585
4	299	329




RM SURFACE MOUNTED
SPOTLIGHT SERIES
PICARD
PICARD





UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

RM40

Product information


Power	**8W/15W**
Beam angle	15°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	31	4053
2	62	4013
3	93	450
4	123	253

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	41	2683
2	82	671
3	123	298
4	164	168

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	276	163
4	235	91


36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	1658
2	116	415
3	174	184
4	232	103







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

RM55

Product information


Power	**8W/15W**
Beam angle	12°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1075
2	144	268
3	216	119
4	288	67

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	70	1669
2	141	417
3	211	185
4	282	104


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	71	1900
2	141	475
3	212	211
4	282	118







UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

RM69

Product information


Power	**20W/25W**
Beam angle	12°/24°/36°
Input voltage	220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

36° 3000K 8W




H(m)	D(cm)	Em(lux/klm)
1	72	1220
2	145	300
3	217	130
4	290	70

36° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	72	2010
2	144	500
3	216	220
4	288	120


36° 3000K 15W



H(m)	D(cm)	Em(lux/klm)
1	72	2450
2	144	610
3	216	270
4	288	150







UGR < 11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

RM86

Product information


Power	**30W/35W**
Beam angle	12°/24°/36°
Input voltage	AC100-240/220-240V
Input frequency	50/60Hz
System Luminous flux	＞120lm/W
CRI	＞90
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Surface Mounted


Light distribution parameters

15° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	37	12776
2	75	3194
3	112	1420
4	149	799

24° 3000K 30W



H(m)	D(cm)	Em(lux/klm)
1	51	8440
2	103	2110
3	154	938
4	206	528

36° 3000K 30W




H(m)	D(cm)	Em(lux/klm)
1	75	5267
2	150	1317
3	224	585
4	299	329



PULL OUT SPOTLIGHT SERIES





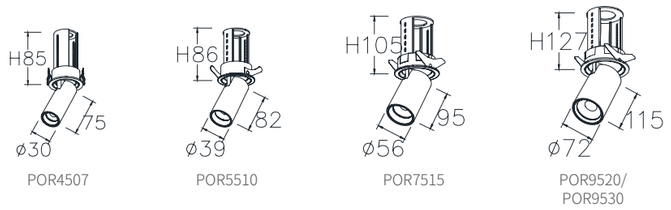

POR4507 POR5510 POR7515 POR9520/ POR9530

POR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	7W/10W/15W/20W/30W
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POR4507	7W	Φ52mm	H85mm	Φ45mm
POR5510	10W	Φ62mm	H86mm	Φ55mm
POR7515	15W	Φ84mm	H105mm	Φ75mm
POR9520	20W	Φ105mm	H127mm	Φ95mm
POR9525	30W	Φ105mm	H127mm	Φ95mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



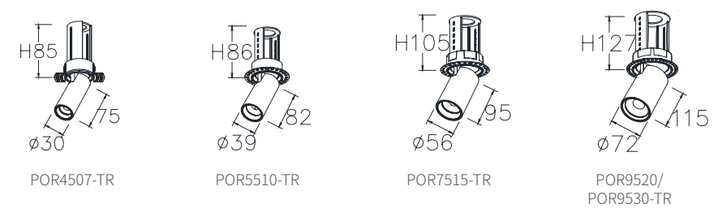

POR4507-TR POR5510-TR POR7515-TR POR9520/ POR9530-TR

POR-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	7W/10W/15W/20W/30W
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POR4507-TR	7W	Φ43mm	H85mm	Φ47mm
POR5510-TR	10W	Φ75mm	H86mm	Φ55mm
POR7515-TR	15W	Φ95mm	H105mm	Φ75mm
POR9520-TR	20W	Φ115mm	H127mm	Φ95mm
POR9525-TR	30W	Φ115mm	H127mm	Φ95mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



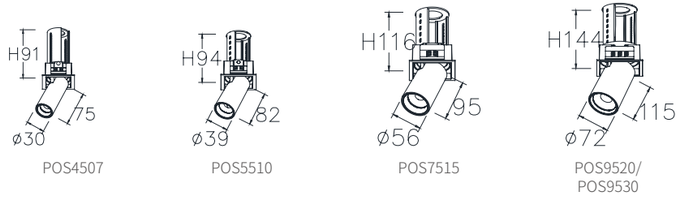

POS4507 POS5510 POS7515 POS9520/ POS9530

POS

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**7W/10W/15W/20W/30W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS4507	7W	Φ53*53mm	H91mm	Φ45*45mm
POS5510	10W	Φ64*64mm	H94mm	Φ55*55mm
POS7515	15W	Φ85*85mm	H116mm	Φ75*75mm
POS9520	20W	Φ105*105mm	H144mm	Φ95*95mm
POS9525	30W	Φ105*105mm	H144mm	Φ95*95mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



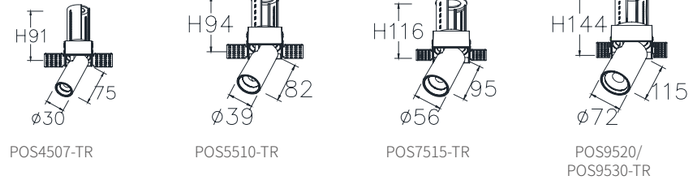

POS4507-TR POS5510-TR POS7515-TR POS9520/ POS9530-TR

POS-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**7W/10W/15W/20W/30W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS4507-TR	7W	Φ44*44mm	H91mm	Φ47*45mm
POS5510-TR	10W	Φ54*54mm	H94mm	Φ57*55mm
POS7515-TR	15W	Φ74*74mm	H116mm	Φ77*75mm
POS9520-TR	20W	Φ94*94mm	H144mm	Φ97*95mm
POS9525-TR	30W	Φ94*94mm	H144mm	Φ97*95mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



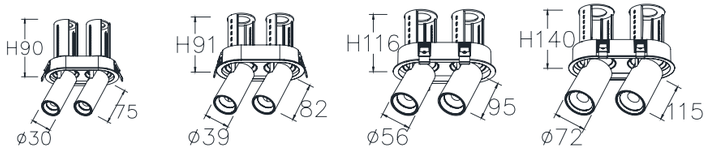

POS1064514 POS1305520 POS1807530 POS2259540/ POS2259560

POS

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**14W/20W/30W/40W/60W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1064507	2*7W	Φ113*63mm	H90mm	Φ106*55mm
POS1305510	2*10W	Φ140*79mm	H91mm	Φ128*67mm
POS1807515	2*15W	Φ194*105mm	H116mm	Φ179*91mm
POS2259520	2*20W	Φ239*125mm	H140mm	Φ223*112mm
POS2259525	2*30W	Φ239*125mm	H140mm	Φ223*112mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



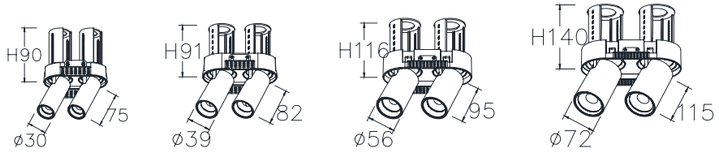

POS1064514-TR POS1305520-TR POS1807530-TR POS2259540/ POS2259560-TR

POS-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**14W/20W/30W/40W/60W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1064507-TR	2*7W	Φ103*53mm	H90mm	Φ105*57mm
POS1305510-TR	2*10W	Φ126*65mm	H91mm	Φ128*68mm
POS1807515-TR	2*15W	Φ177*88mm	H116mm	Φ179*91mm
POS2259520-TR	2*20W	Φ222*108mm	H140mm	Φ224*111mm
POS2259525-TR	2*30W	Φ222*108mm	H140mm	Φ224*111mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



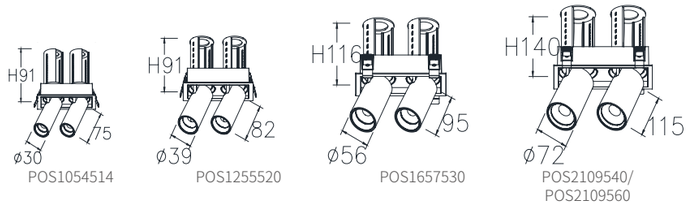

POS1054514 POS1255520 POS1657530 POS2109540/ POS2109560

POS

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**14W/20W/30W/40W/60W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1054514	2*7W	Φ111*55mm	H90mm	Φ102*46mm
POS1255520	2*10W	Φ130*69mm	H91mm	Φ122*58mm
POS1657530	2*15W	Φ180*91mm	H116mm	Φ165*77mm
POS2109540	2*20W	Φ224*110mm	H140mm	Φ209*98mm
POS2109560	2*30W	Φ224*110mm	H140mm	Φ209*98mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



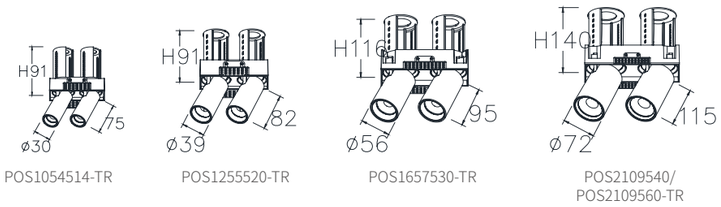

POS1054514-TR POS1255520-TR POS1657530-TR POS2109540/ POS2109560-TR

POS-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**14W/20W/30W/40W/60W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1054514-TR	2*7W	Φ100*44mm	H90mm	Φ102*47mm
POS1255520-TR	2*10W	Φ116*55mm	H91mm	Φ118*58mm
POS1657530-TR	2*15W	Φ163*74mm	H116mm	Φ165*77mm
POS2109540-TR	2*20W	Φ208*94mm	H140mm	Φ209*97mm
POS2109560-TR	2*30W	Φ208*94mm	H140mm	Φ209*97mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



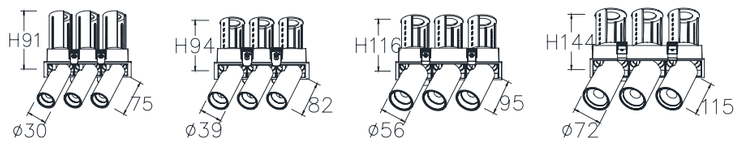

POS1304521 POS1655530 POS2257545 POS2859560/ POS2859590

POS

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**21W/30W/45W/60W/90W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1304521	3*7W	Φ138*53mm	H90mm	Φ131*46mm
POS1655530	3*10W	Φ170*65mm	H91mm	Φ162*57mm
POS2257545	3*15W	Φ229*85mm	H116mm	Φ221*76mm
POS2859560	3*20W	Φ290*105mm	H140mm	Φ281*96mm
POS2859590	3*30W	Φ290*105mm	H140mm	Φ281*96mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485



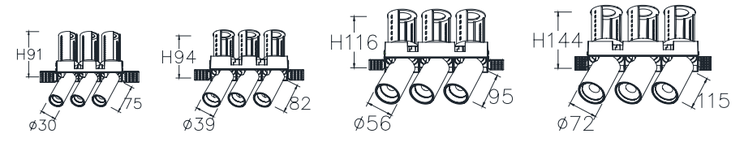

POS1304521-TR POS1655530-TR POS2257545-TR POS2859560/ POS2859590-TR

POS-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**21W/30W/45W/60W/90W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1304521-TR	3*7W	Φ129*44mm	H90mm	Φ132*46mm
POS1655530-TR	3*10W	Φ160*55mm	H91mm	Φ163*57mm
POS2257545-TR	3*15W	Φ218*74mm	H116mm	Φ222*76mm
POS2859560-TR	3*20W	Φ279*94mm	H140mm	Φ282*96mm
POS2859590-TR	3*30W	Φ279*94mm	H140mm	Φ282*96mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W



H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485





POS1754528 POS2205540 POS2957560 POS2375580/ POS37595120

POS

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**28W/40W/60W/80W/120W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1754528	4*7W	Φ182*53mm	H90mm	Φ178*46mm
POS2205540	4*10W	Φ225*65mm	H91mm	Φ218*57mm
POS2957560	4*15W	Φ303*85mm	H116mm	Φ295*76mm
POS2375580	4*20W	Φ383*105mm	H140mm	Φ375*96mm
POS37595120	4*30W	Φ383*105mm	H140mm	Φ375*96mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485





POS1754528-TR POS2205540-TR POS2957560-TR POS3759580/ POS37595120-TR

POS-TR

UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information

Power	**28W/40W/60W/80W/120W**
Beam angle	15°/24°/38°/50°
Input voltage	AC220-240V
Input frequency	50/60Hz
System Luminous flux	＞100lm/W
CRI	＞90/97
Finish color	white/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Mode

Product Code	Power	Diameter	Height	Cut-out
POS1754528-TR	4*7W	Φ173*44mm	H90mm	Φ176*46mm
POS2205540-TR	4*10W	Φ215*55mm	H91mm	Φ218*57mm
POS2957560-TR	4*15W	Φ292*74mm	H116mm	Φ295*76mm
POS3759580-TR	4*20W	Φ372*94mm	H140mm	Φ375*96mm
POS37595120-TR	4*30W	Φ372*94mm	H140mm	Φ375*96mm


Light distribution parameters

36° 4000K 7W




H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35

36° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	4180
2	130	825
3	195	341
4	260	261

36° 4000K 30W



H(m)	D(cm)	Em(lux/klm)
1	65	7762
2	130	1533
3	195	633
4	260	485

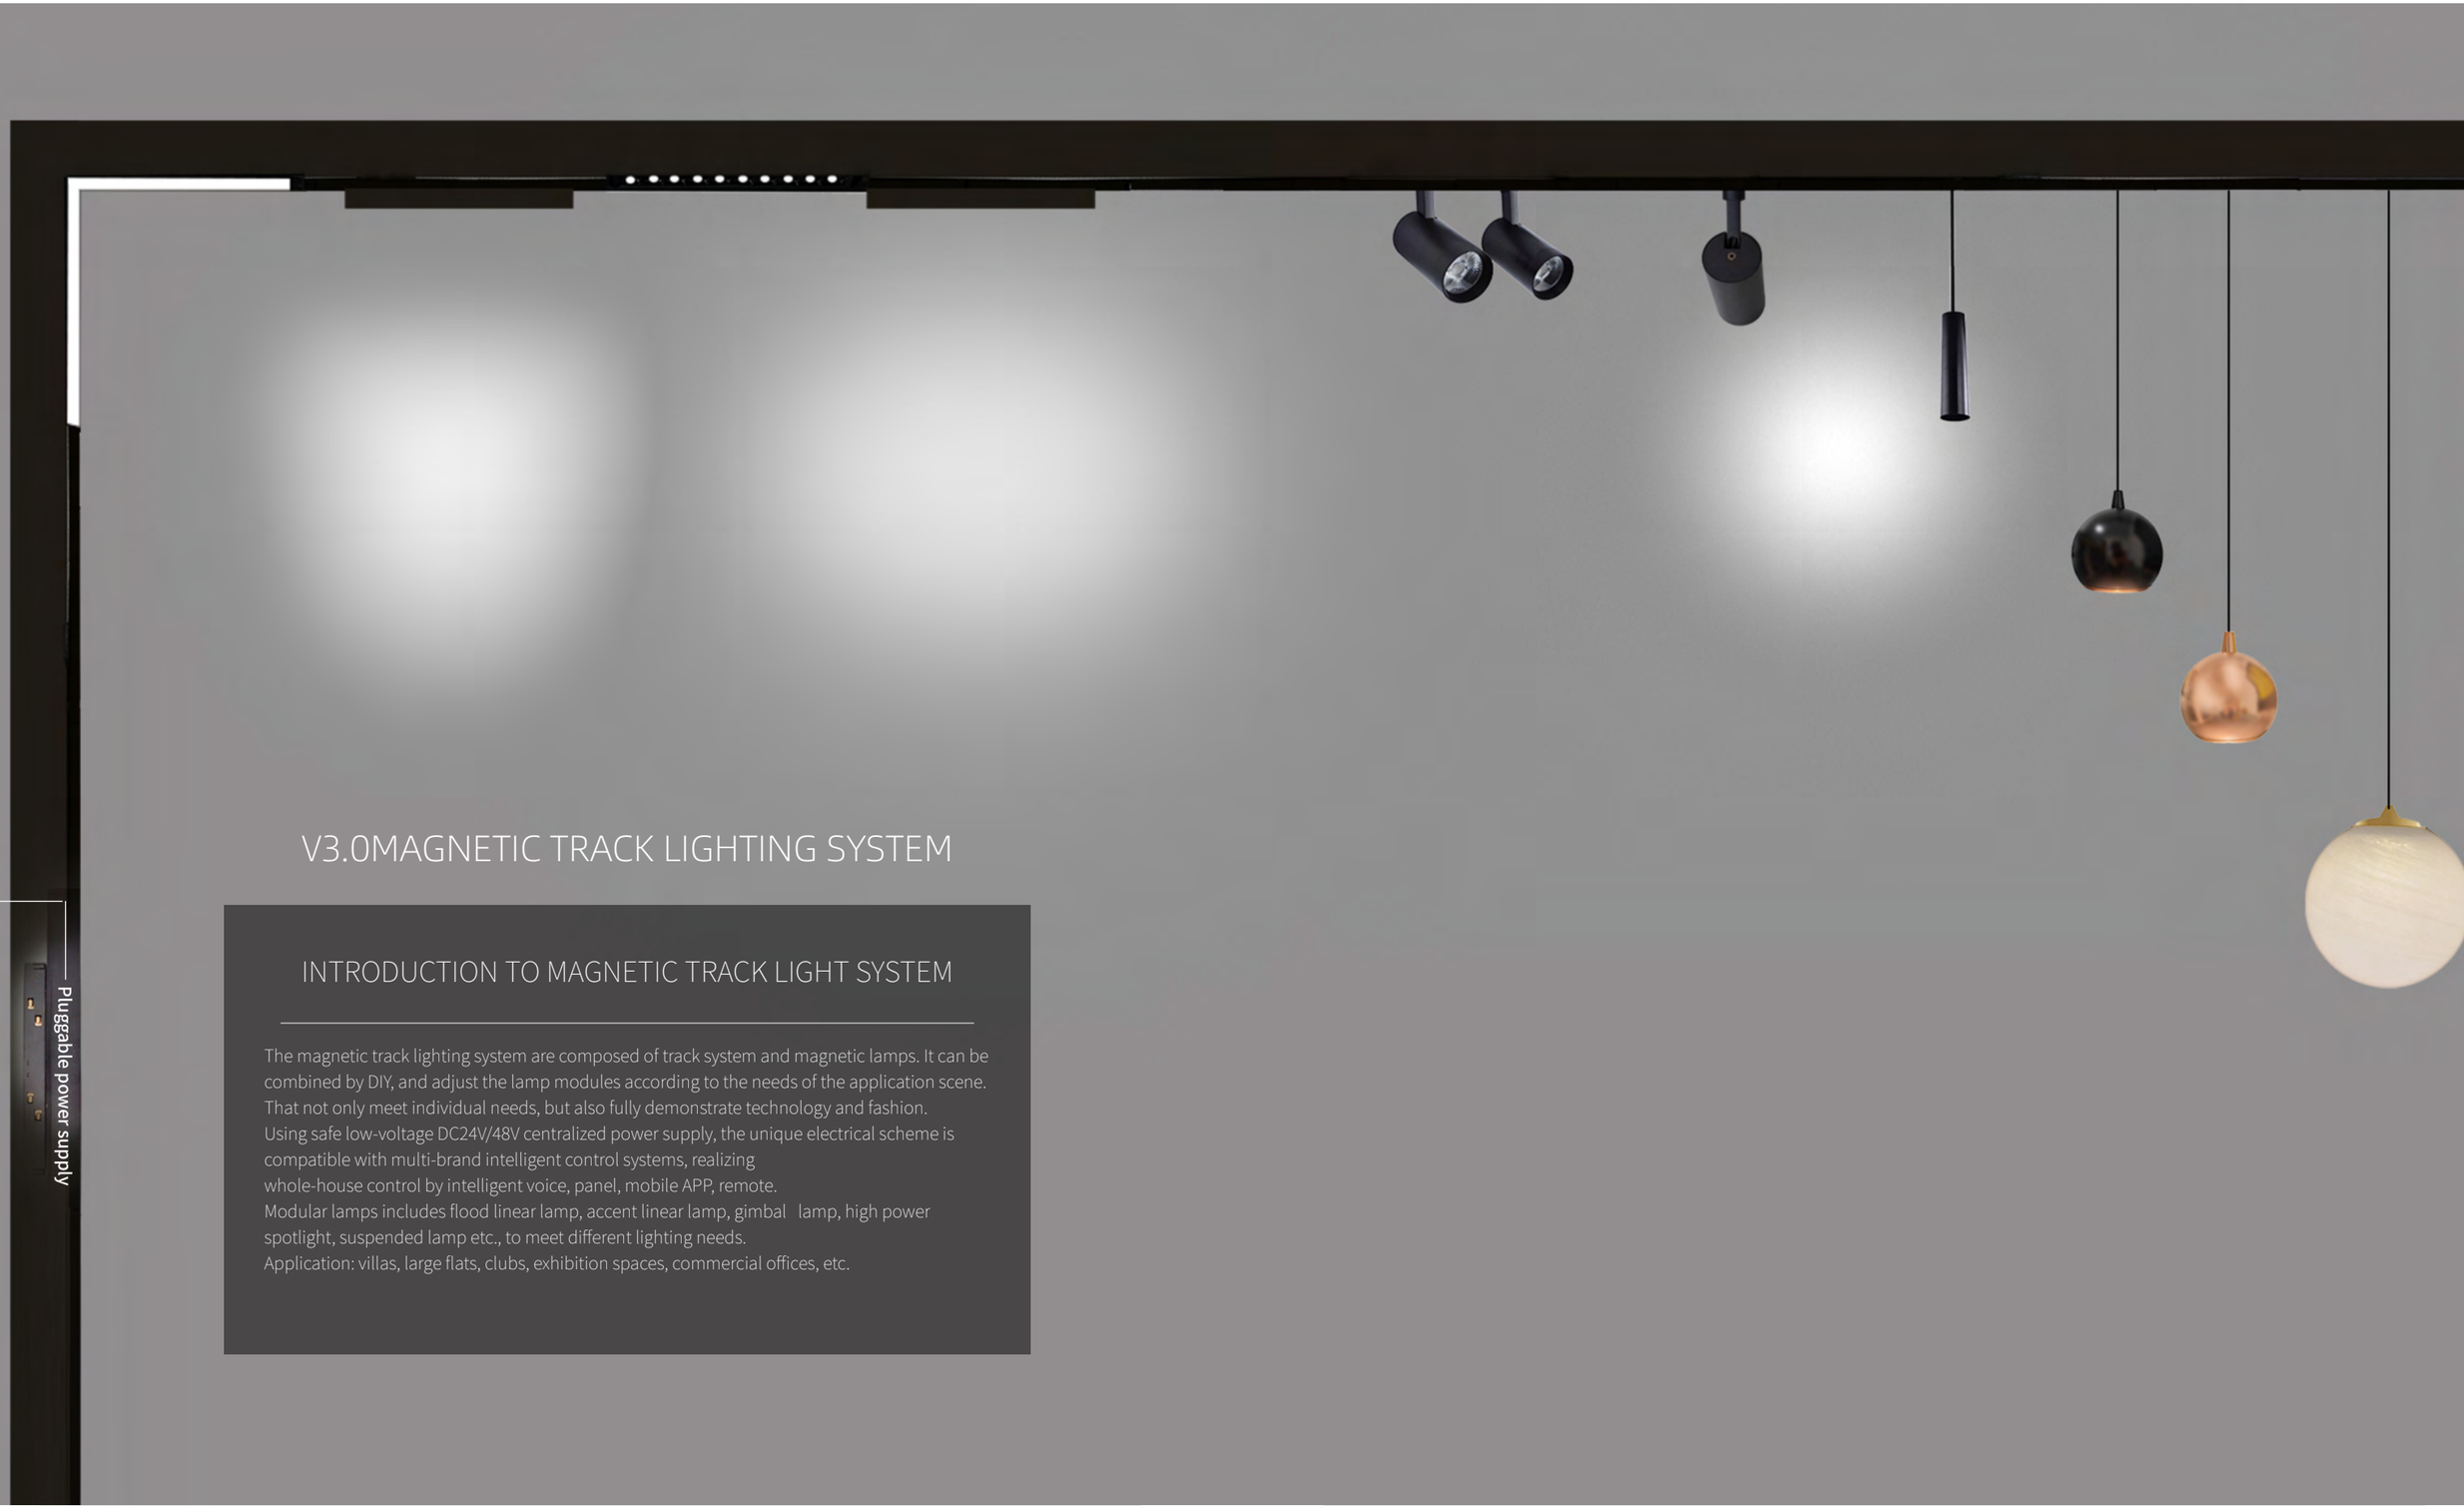


V3.0MAGNETIC TRACK LIGHTING SYSTEM

INTRODUCTION TO MAGNETIC TRACK LIGHT SYSTEM

The magnetic track lighting system are composed of track system and magnetic lamps. It can be combined by DIY, and adjust the lamp modules according to the needs of the application scene. That not only meet individual needs, but also fully demonstrate technology and fashion.
Using safe low-voltage DC24V/48V centralized power supply, the unique electrical scheme is compatible with multi-brand intelligent control systems, realizing
whole-house control by intelligent voice, panel, mobile APP, remote.
Modular lamps includes flood linear lamp, accent linear lamp, gimbal lamp, high power spotlight, suspended lamp etc., to meet different lighting needs.
Application: villas, large flats, clubs, exhibition spaces, commercial offices, etc.





Recessed Track Rail
RC500 / RC1000 / RC1500 / RC2000

Product information

Power	384W Max
Beam angle	/
Input voltage	DC48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	White/Black


Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Recessed

Accessories





Model:TC9001A
Trimless Track
Horizontal L
connector






Model:TC9007A
Trimless Track
T Connector






Model:TC9002A
Track veritcal
L connector







Model:TC9003A
Recessed track
horizontal L
connector with wings






Model:TC9004A
Recessed Track Cross
Connector
With Wings






Model:TC9005A
Recessed Track T
Connector With Wings






Model:RC01
Recessed kit






Model:PL07
Straight Track
Connector






Model:PL08
L Type Connector







Suspend Track Rail
SP500 / SP1000 / SP1500 / SP2000

Product information

Power	384W Max
Beam angle	/
Input voltage	DC48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	white/black


Product performance


Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Pendant

Light distribution parameters




Model:TC9001A
Trimless Track
Horizontal L
connector







Model:TC9006A
Trimless Track
Cross Connector






Model:C9007A
Trimless Track
T Connector





Model:TC9002A
Track veritcal L
connector





Model:MS01
Suspension wires




Model:MS02-06
suspension rod




Model:PL07
Straight Track
Connector



Model:PL08
L Type Connector







Ceiling Mount Track Rail
SM500 / SM1000 / SM1500 / SM2000

Product information

Power	384W Max
Beam angle	/
Input voltage	DC48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	white/black

Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminum + Copper
Installation	Surface Mounted


Light distribution parameters

Model:TC9001A
Trimless Track
Horizontal L
connector

Model:TC9006A
Trimless Track
Cross Connector

Model:C9007A
Trimless Track
T Connector


Model:TC9002A
Track veritcal L
connector

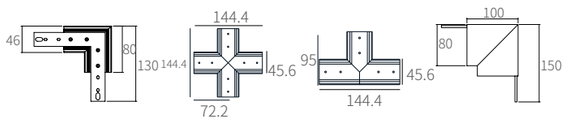




Model:PL07
Straight Track
Connector


Model:PL08
L Type Connector







General Lighting Linear
MLL300/MLL640/MLL960




Product information

Power	**10W/20W/30W**
Beam angle	110°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞90lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




MLL300 10W 3000K CRI>90 110°




MLL300 10W 4000K CRI>90 110°




MLL640 20W 3000K CRI>90 110°



MLL640 20W 4000K CRI>90 110°




MLL960 30W 3000K CRI>90 110°



MLL960 30W 4000K CRI>90 110°





Accent Lighting Linear
MLS01/MLS03/MLS05/MLS10

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	1*1W/3*1W/5*1W/10*1W/ 3*2W/5*2W/10*2W
Beam angle	15°/30°/45°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




MLS01 1W 3000K CRI>90 30°



MLS03 3W 3000K CRI>90 30°




MLS05 5W 3000K CRI>90 30°



MLS10 10W 3000K CRI>90 30°





Wall Washer Lighting Linear
MW05/MW10/MW20

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	5W/10W,10W/20W, 20W/30W
Beam angle	100*80*20°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters



MW0510 10W 3000K CRI>90 90°




MW1020 20W 3000K CRI>90 90°



MW2030 30W 3000K CRI>90 90°





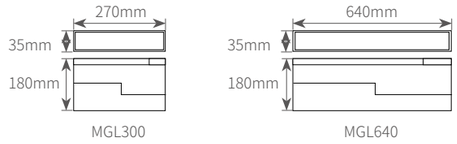

Gimbal General Lighting MGL300/MGL640

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**10W/20W**
Beam angle	120°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




MGL300 10W 3000K CRI>90 110°



MLL300 10W 4000K CRI>90 110°




MLL640 20W 3000K CRI>90 110°



MLL640 20W 4000K CRI>90 110°



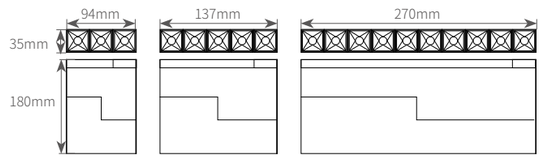

Gimbal Accent Lighting MGS03/MGS05/MGS10

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**3W/6W,5W/10W,10W/20W**
Beam angle	15°/30°/45°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters



MLS03 3W 3000K CRI>90 30°




MLS05 5W 3000K CRI>90 30°



MLS10 10W 3000K CRI>90 30°



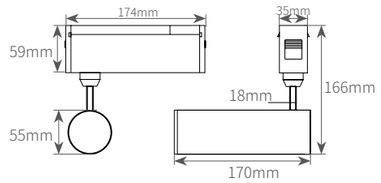

Spotlight
MS55

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**8W/15W**
Beam angle	15°/24°/36°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	White/black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters



Beam Angle=15°

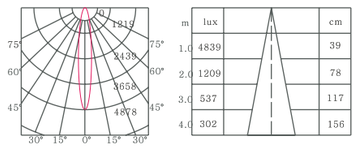


Beam Angle=24°

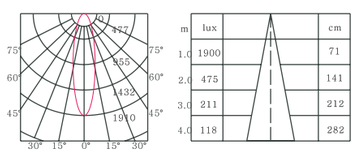

Beam Angle=36°





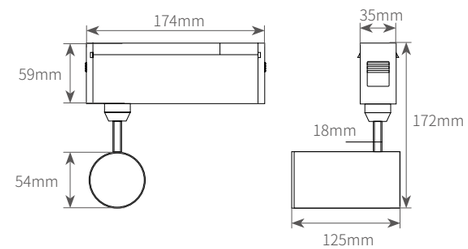

Spotlight
MS54

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**15W**
Beam angle	15°/24°/36°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	White/black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters




MS54 15W 3000K CRI>90 15°



MS54 15W 4000K CRI>90 15°





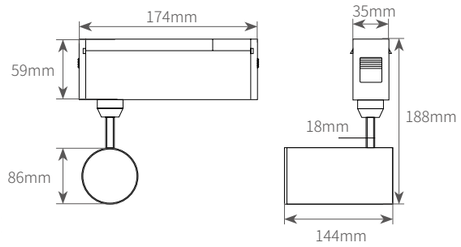

HighPowerSpotlight MS86

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**15W/20W/25W/30W/35W**
Beam angle	15°/24°/36°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100lm/W
CRI	＞90
Finish color	White/black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters



MS86 15W 3000K CRI>90 15°




MS86 15W 4000K CRI>90 15°





Cylinder Pendant Lamp MP55



Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information

Power	**8W/15W**
Beam angle	15°/24°/36°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Finish color	White/black/brown/grey/green/red/blue


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters




MP55 15W 3000K CRI>90 24°



MP55 15W 4000K CRI>90 24°



MP55 15W 3000K CRI>90 36°





MP55 15W 4000K CRI>90 36°














Pearl Chandelier
MP8005

Product information	
Power	**5W**
Beam angle	85°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Material	Aluminum
Finish color	black/golden/silver







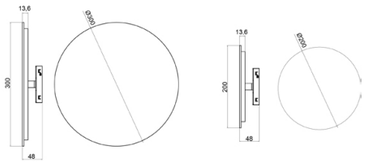


Meera Wall Lamp
MWR2007/MWR3010

Product information	
Power	**7W/10W**
Beam angle	360°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Material	Aluminum
Finish color	White/black/brown/grey/green/red/blue









Flicker free

IP20

2700K

3000K

4000K

1800K-3000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0~10V

DALI

PLC

Cutting Light
MS4015FS

Product information	
Power	**15W**
Beam angle	20°-40°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Material	Aluminum
Finish color	white/black





Flicker free

IP20

2700K

3000K

4000K

1800K-3000K

2700K-6500K

Triac Dimming


Bluetooth

Zigbee

0~10V

DALI

PLC

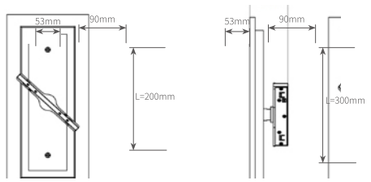

Fortune Wall Lamp
MWS2005/MWS3008


Product information	
Power	**5W/8W**
Beam angle	360°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞90
Material	Aluminum
Finish color	White/black/brown/grey/green/red/blue










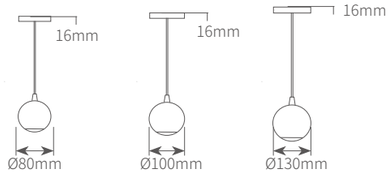

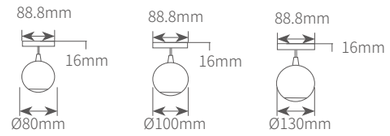

Flicker free

IP20

2700K

3000K

4000K

1800K-3000K

2700K-6500K

Triac Dimming

Bluetooth

Zigbee

0-10V

DALI

PLC

Meteorite Pendant Bulb
MP8006/MP10006/MP13006

Product information


Power	**2W/4W/6W**
Beam angle	360°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Glass
Finish color	Cloud white

Meteorite Bulb
MP8006/MP10006/MP13006

Product information

Power	**2W/4W/6W**
Beam angle	360°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Glass
Finish color	Cloud white



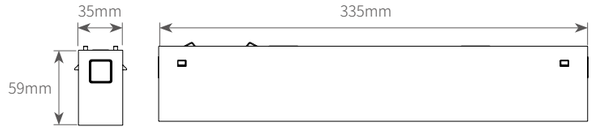

Build In Power Supply
KGP-100V48N/KGP-150V48N/KGP-250V48N


Product information


Power	**100W/150W/250W**
Output Current	0-2.1A
Input voltage	220V AC
Input frequency	50/60hz
Finish color	Black/White

Product performance

PF	⩾0.95
Efficiency (*Typical)	⩾90%
Ta/Operation Temperature	-25 ~ +40°C
Dimension	335*35*59mm(L*W*H)







MS4216


Product information

Power	**2*8W**
Beam angle	15°/24°/36°
Input voltage	48V
Input frequency	/
System Luminous flux	＞80Lm/w
CRI	＞90
Finish color	Sand white / Sand black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf⩾92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

15° **3000K**




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

24° **3000K**




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

36° **3000K**



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	176	163
4	235	91



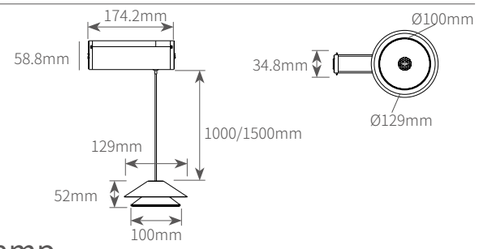

Lumina Pendant Lamp
MP1005

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	5W
Beam angle	24°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Red/white/black/brown/grey

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color





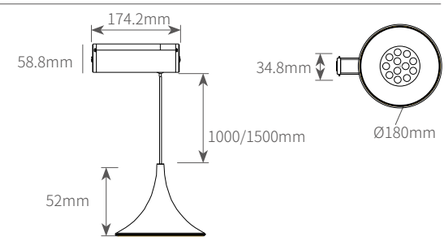

Crimson Pendant Lamp
MP1806

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

2800K-6000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	6W
Beam angle	15°/24°/36°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Red/brown/marbbled white/marbled black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

24° 4000K 15W



H(m)	D(cm)	Em(lux/klm)
1	46	1133
2	92	284
3	139	126
4	185	71

36° 4000K 15W




H(m)	D(cm)	Em(lux/klm)
1	65	1133
2	130	284
3	195	126
4	260	71

Color





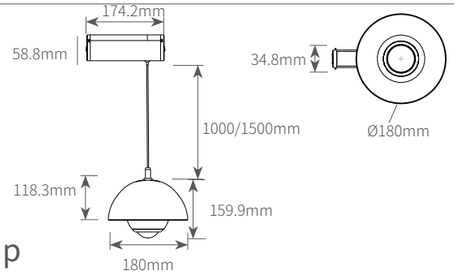

Ember Pendant Lamp
MP1807

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**7W**
Beam angle	36°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	White/grey

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color





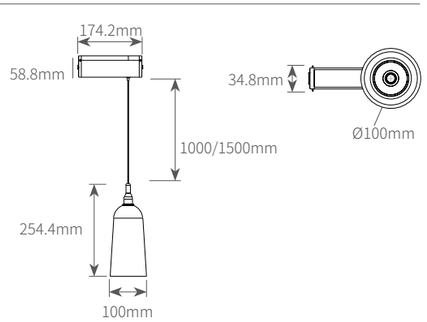

Eos Pendant Lamp
MP6505

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

2800K-6000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**5W**
Beam angle	24°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Grey /Brown

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color





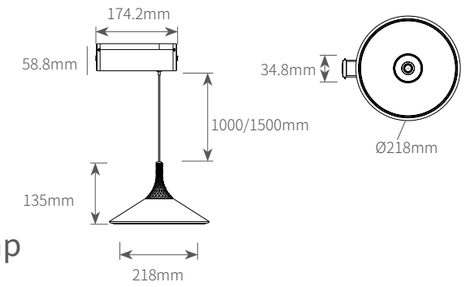

Aura Pendant Lamp
MP12805

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**5W**
Beam angle	24°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Grey/Brown

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

120° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

120° 4000K




H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18

Color





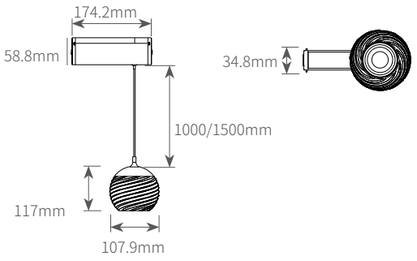

Neo Pendant Lamp
MP1106

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

2800K-6000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**6W**
Beam angle	15-60°
Input voltage	48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	28	1594
2	57	398
3	85	177
4	114	100

36° 3000K




H(m)	D(cm)	Em(lux/klm)
1	61	655
2	123	164
3	184	73
4	246	41

60° 3000K



H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17



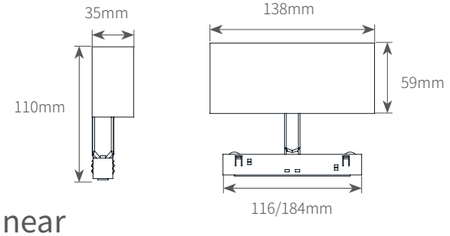

Gimbal Spotlight Linear
MGLS0505/MGLS0510

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**5*1W/5*2W**
Beam angle	15°/30°/45°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100Lm/w
CRI	＞90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 5W




H(m)	D(cm)	Em(lux/klm)
1	34	2656
2	68	664
3	101	295
4	135	166

15° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	32	7906
2	64	1976
3	95	878
4	127	494

30° 3000K 5W




H(m)	D(cm)	Em(lux/klm)
1	52	1952
2	104	488
3	156	217
4	208	122

30° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	43	6830
2	86	1707
3	129	759
4	171	427

45° 3000K 5W




H(m)	D(cm)	Em(lux/klm)
1	75	1272
2	150	318
3	225	141
4	300	80

45° 3000K 20W



H(m)	D(cm)	Em(lux/klm)
1	74	2497
2	147	874
3	221	389
4	294	219



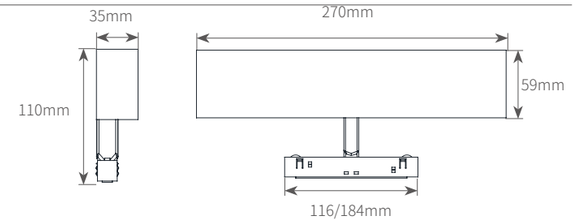

Gimbal Spotlight Linear
MGLS1010/MGLS1020

UGR<19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**10*1W/10*2W**
Beam angle	15°/30°/45°
Input voltage	DC48V
Input frequency	/
System Luminous flux	＞100Lm/w
CRI	＞90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM<3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 10W




H(m)	D(cm)	Em(lux/klm)
1	37	4492
2	74	1123
3	112	499
4	149	280

15° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	32	7906
2	64	1976
3	95	878
4	127	494

30° 3000K 10W




H(m)	D(cm)	Em(lux/klm)
1	53	3659
2	105	915
3	158	407
4	210	229

30° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	43	6830
2	86	1707
3	129	759
4	171	427

45° 3000K 10W



H(m)	D(cm)	Em(lux/klm)
1	74	2545
2	147	636
3	221	283
4	295	159

45° 3000K 20W




H(m)	D(cm)	Em(lux/klm)
1	74	2497
2	147	874
3	221	389
4	294	219



MAGNETIC SYSTEM V4.0

Various specifications

According to the customer's requirements, it can be cut into different lengths and matched with different shapes to reflect different lighting effects.
All products are available in pendant, surface mount and recessed mount versions.

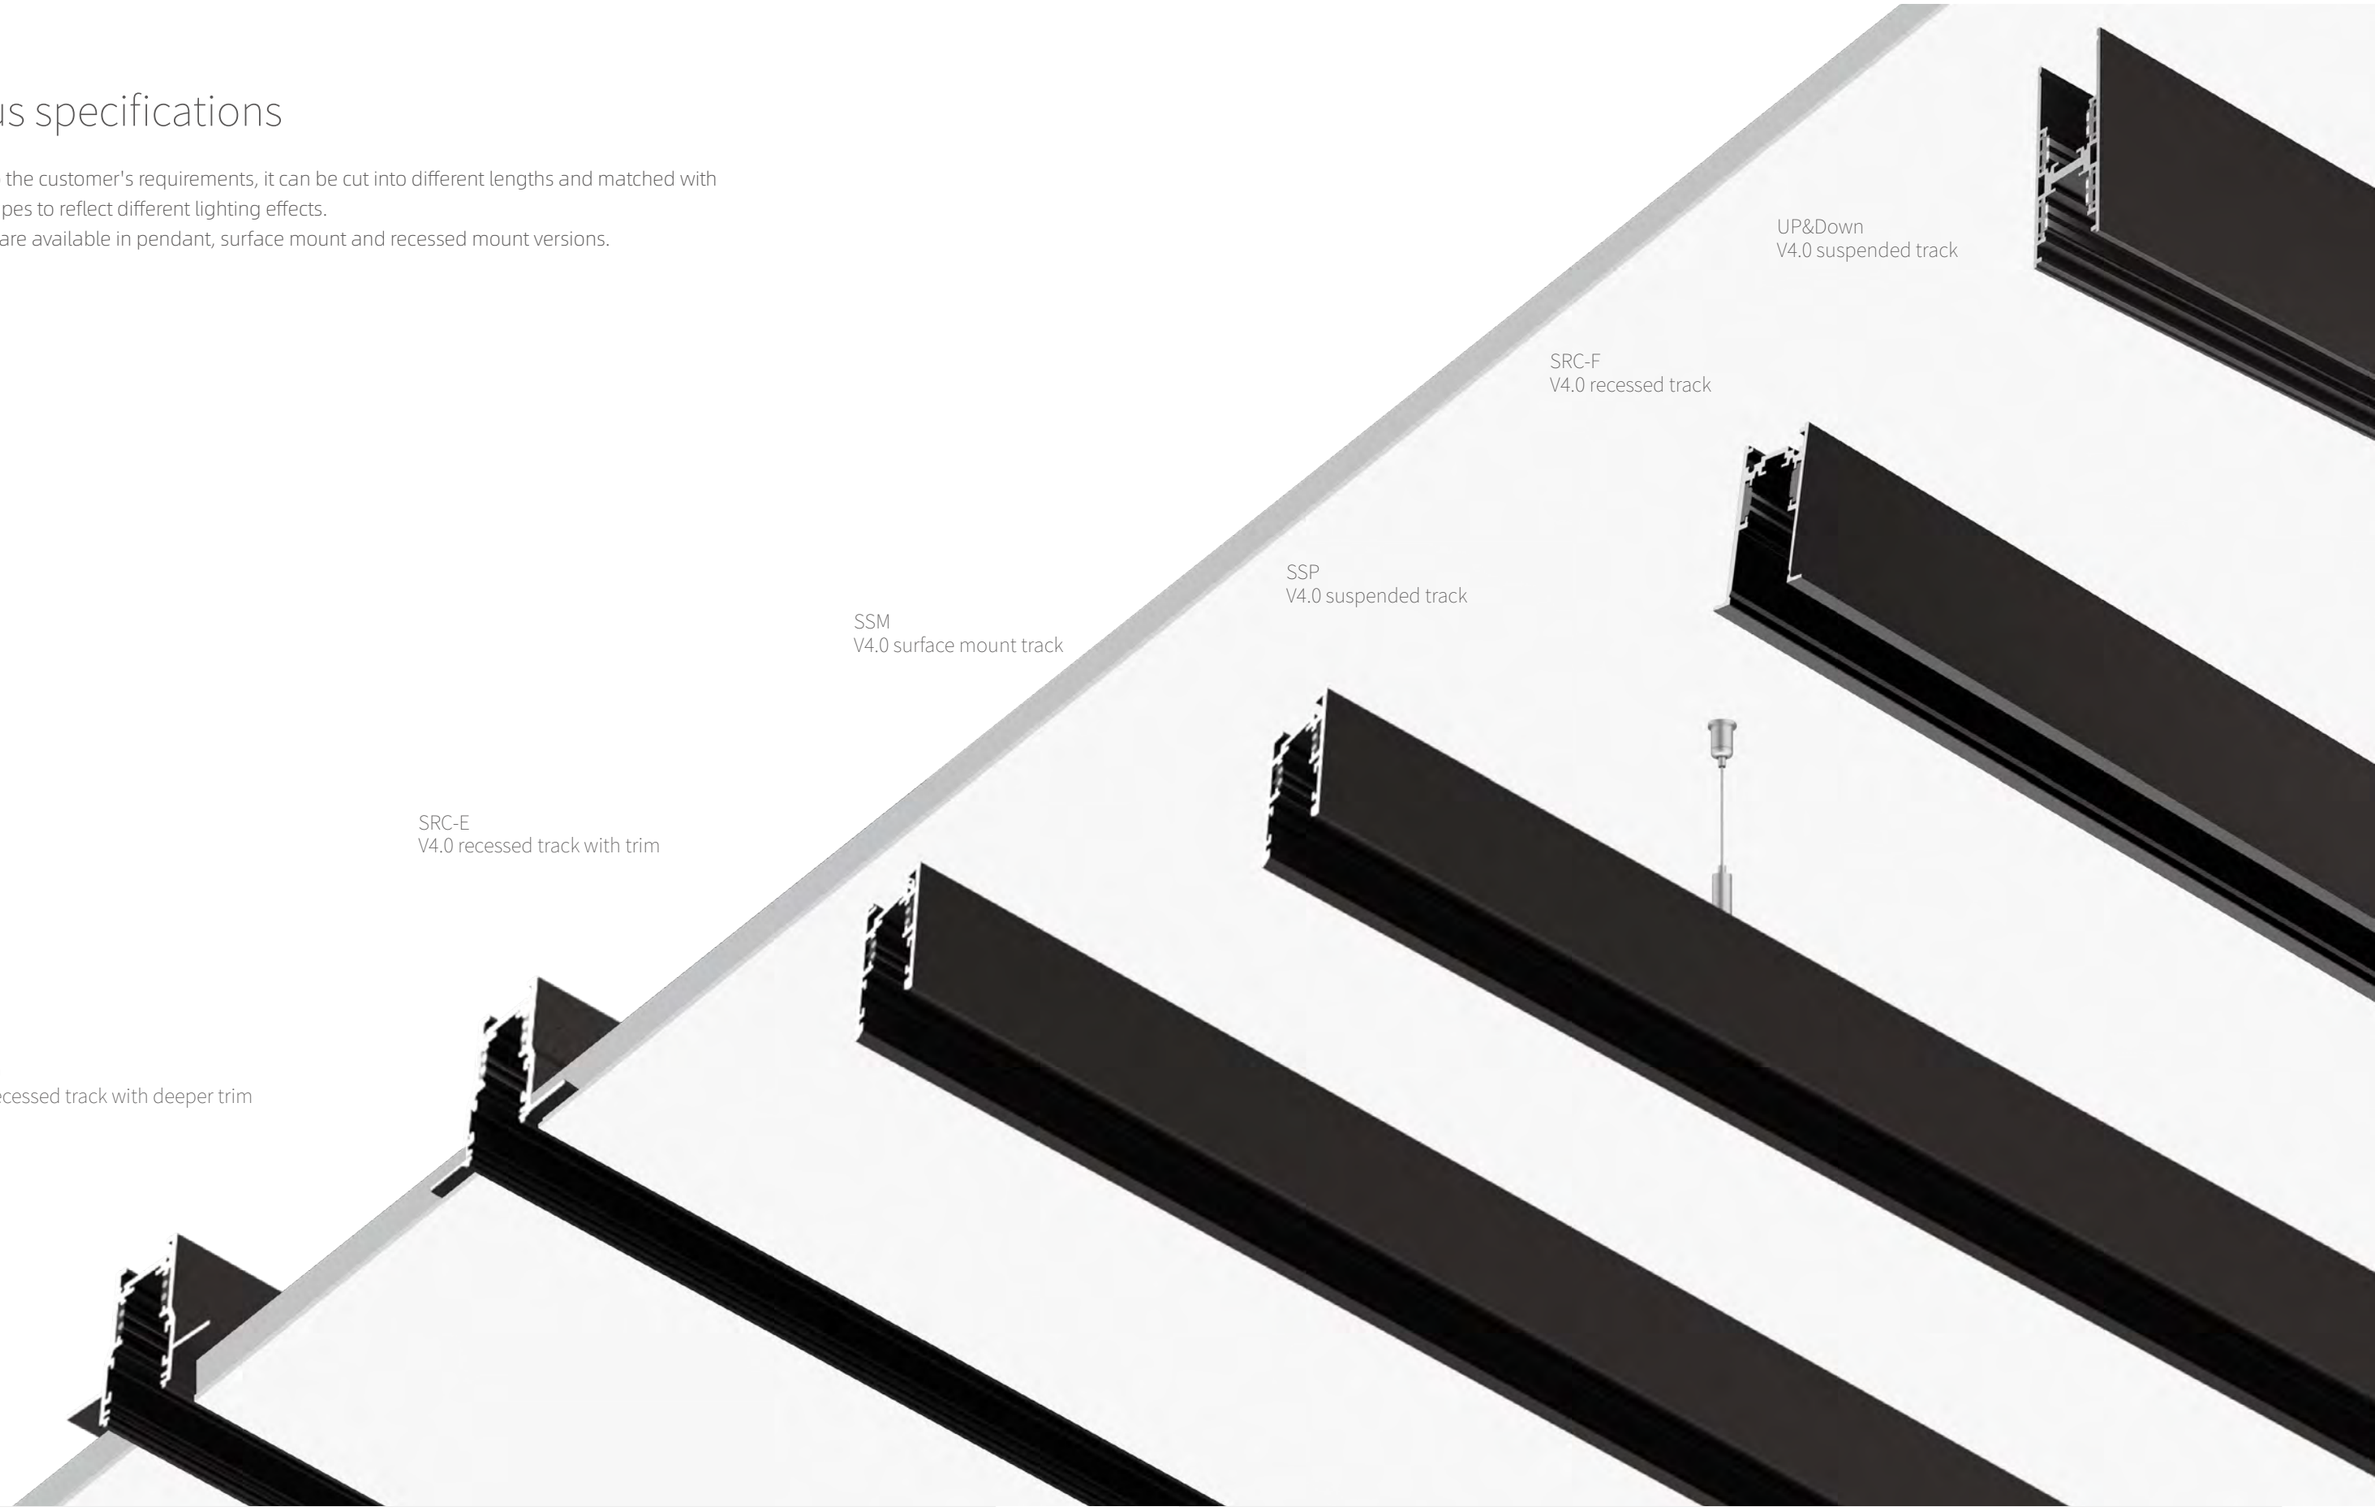



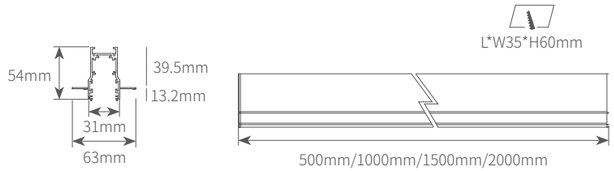

Recessed track rail with deeper trim
SRC-D


Product information

Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed


Accessories




STC9011




STC9012




STC9013



STC9014




STC90015














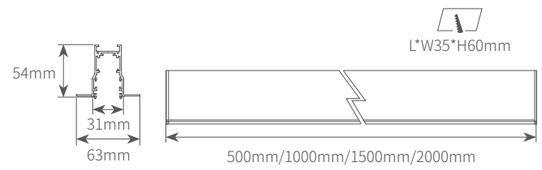

Recessed track rail with trim
SRC-E

Product information

Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / Sand black


Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed


Accessories




STC9006



STC9007




STC9008



STC9009





STC90010
















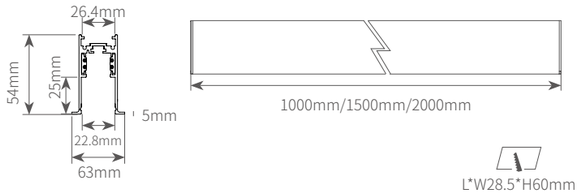

Recessed track rail with face trim
SRC-F

Product information

Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Pendant


Accessories



STC9001F




STC9002F



STC9003F



STC9004F



STC9005F















SRC01F









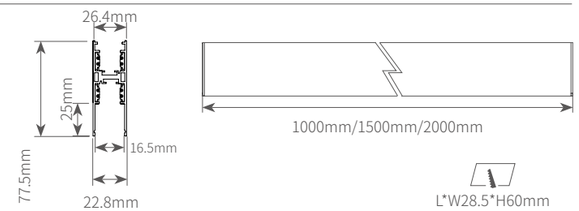

Up & down track rail
SRC-U

Product information

Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / Sand black/brushed copper

Product performance


Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Pendart











Surface mount / pendant track rail
SSM-D/SSP-D


Product information

Power	768W Max
Beam angle	/
Input voltage	24/48V
Input frequency	/
System Luminous flux	/
CRI	/
Finish color	Sand white / Sand black/Brushed copper

Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Surface Mounted


Accessories




STC9001 STC9002 STC9003 ISTC9004 STC90005







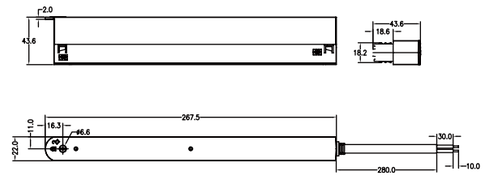

Build in power supply
KGP-100V48N/KGP-150V48N/KGP-250V48N


Product information

Power	**100W/150W/250W**
Output Current	0-2.1A
Input voltage	220V AC
Input frequency	50/60hz
Finish color	Black/White

Product performance

PF	⩾0.95
Efficiency (*Typical)	⩾90%
Ta/Operation Temperature	-25 ~ +40°C
Dimension	267.5×43.6×22mm(L*W*H)





SMLL3007

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information


Power	**7W/10W**
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

110° 3000K



H(m)	D(cm)	Em(lux/klm)
1	203	178
2	407	45
3	610	20
4	813	11


110° 4000K



H(m)	D(cm)	Em(lux/klm)
1	203	196
2	407	49
3	610	22
4	813	12







SMLL6015

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

Product information


Power	**15W**
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

110° 3000K



H(m)	D(cm)	Em(lux/klm)
1	213	504
2	426	126
3	640	56
4	853	31


110° 4000K



H(m)	D(cm)	Em(lux/klm)
1	203	575
2	407	144
3	610	64
4	813	36







SMLL9022

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0~10V
DALI
PLC

Product information


Power	**22W**
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

110° 3000K



H(m)	D(cm)	Em(lux/klm)
1	213	596
2	426	149
3	640	66
4	853	37


110° 4000K



H(m)	D(cm)	Em(lux/klm)
1	213	748
2	426	187
3	640	83
4	853	47







SMLL12030

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0~10V
DALI
PLC

Product information


Power	**30W**
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

110° 3000K



H(m)	D(cm)	Em(lux/klm)
1	213	596
2	426	149
3	640	66
4	853	37

110° 4000K




H(m)	D(cm)	Em(lux/klm)
1	213	748
2	426	187
3	640	83
4	853	47









Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMGL3010

Product information


Power	**10W**
Beam angle	110°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

110° 3000K



H(m)	D(cm)	Em(lux/klm)
1	203	217
2	407	48
3	610	26
4	813	13


110° 4000K



H(m)	D(cm)	Em(lux/klm)
1	203	227
2	407	52
3	610	31
4	813	15







Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMLS0606/SMLS0612

Product information


Power	**6W/10W**
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 6W




H(m)	D(cm)	Em(lux/klm)
1	34	2656
2	68	664
3	101	295
4	135	166

15° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	34	3098
2	38	732
3	101	336
4	135	216

30° 3000K 6W




H(m)	D(cm)	Em(lux/klm)
1	52	1952
2	104	488
3	156	217
4	208	122

30° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	56	2195
2	111	549
3	167	244
4	223	137

45° 3000K 6W



H(m)	D(cm)	Em(lux/klm)
1	75	1272
2	150	318
3	225	141
4	300	80


45° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	86	1180
2	172	295
3	259	131
4	345	74







Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMLS1212/SMLS1224

Product information


Power	**12W/20W**
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	37	4492
2	74	1123
3	112	499
4	149	280

15° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	32	7906
2	64	1976
3	95	878
4	127	494

30° 3000K 12W




H(m)	D(cm)	Em(lux/klm)
1	53	3659
2	105	915
3	158	407
4	210	229

30° 4000K 20W




H(m)	D(cm)	Em(lux/klm)
1	43	6830
2	86	1707
3	129	759
4	171	427

45° 3000K 12W



H(m)	D(cm)	Em(lux/klm)
1	74	2545
2	147	636
3	221	283
4	295	159


45° 4000K 20W



H(m)	D(cm)	Em(lux/klm)
1	74	2497
2	147	874
3	221	389
4	294	219







Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMGS0606/SMGS0612

Product information


Power	**6W/12W**
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K 6W




H(m)	D(cm)	Em(lux/klm)
1	34	2656
2	68	664
3	101	295
4	135	166

15° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	34	3098
2	38	732
3	101	336
4	135	216

30° 3000K 6W




H(m)	D(cm)	Em(lux/klm)
1	52	1952
2	104	488
3	156	217
4	208	122

30° 4000K 10W




H(m)	D(cm)	Em(lux/klm)
1	56	2195
2	111	549
3	167	244
4	223	137

45° 3000K 6W



H(m)	D(cm)	Em(lux/klm)
1	75	1272
2	150	318
3	225	141
4	300	80


45° 4000K 10W



H(m)	D(cm)	Em(lux/klm)
1	86	1180
2	172	295
3	259	131
4	345	74







SMGS1212/SMGS1224

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information

Power	**12/24W**
Beam angle	Single CCT: 15°/30°/45° Tunable white: 24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15° 3000K 12W

H(m)	D(cm)	Em(lux/klm)
1	37	4492
2	74	1123
3	112	499
4	149	280

15° 4000K 24W

H(m)	D(cm)	Em(lux/klm)
1	32	9586
2	64	2396
3	95	1065
4	127	599

30° 3000K 12W

H(m)	D(cm)	Em(lux/klm)
1	53	3659
2	105	915
3	158	407
4	210	229

30° 4000K 24W


H(m)	D(cm)	Em(lux/klm)
1	43	6982
2	86	1745
3	129	776
4	171	436


45° 3000K 12W

H(m)	D(cm)	Em(lux/klm)
1	74	2545
2	147	636
3	221	283
4	295	159

45° 4000K 24W

H(m)	D(cm)	Em(lux/klm)
1	74	3280
2	147	820
3	221	364
4	294	205





SMLT3006/SMLT6012

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information

Power	**6W/12W**
Beam angle	120°
Input voltage	48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters


120° 3000K

H(m)	D(cm)	Em(lux/klm)
1	203	178
2	407	45
3	610	20
4	813	11

120° 4000K

H(m)	D(cm)	Em(lux/klm)
1	203	196
2	407	49
3	610	22
4	813	12





SMS4216

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	**2.8W**
Beam angle	15°/24°/36°
Input voltage	48V
Input frequency	16KHz
System Luminous flux	＞80Lm/w
CRI	＞90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	176	163
4	235	91



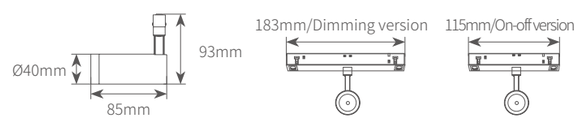

SMS4005/SMS4008

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information


Power	**5W/8W**
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞75Lm/w
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	31	4053
2	62	1013
3	93	450
4	123	253

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	41	2683
2	82	671
3	123	298
4	164	168

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	176	163
4	235	91


36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	1658
2	116	415
3	174	184
4	232	103







Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMS4010/SMS4016

Product information


Power	**10W/16W**
Beam angle	15°/24°/36°/**60°**
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞75Lm/w
CRI	＞90/97
Finish color	white / black/chrome/brushed copper

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	31	3833
2	63	958
3	94	426
4	125	240

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	31	4053
2	62	1013
3	93	450
4	123	253

24° 3000K




H(m)	D(cm)	Em(lux/klm)
1	43	2362
2	86	590
3	128	262
4	171	148

24° 4000K




H(m)	D(cm)	Em(lux/klm)
1	41	2683
2	82	671
3	123	298
4	164	168

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	59	1464
2	117	366
3	176	163
4	235	91


36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	58	1658
2	116	415
3	174	184
4	232	103





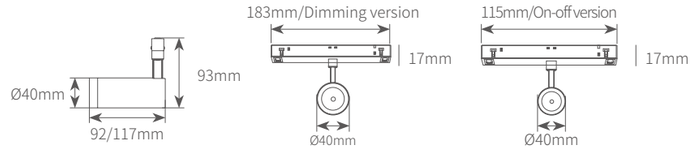



Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

SMS4005F/SMS4008F

Product information


Power	**5W/8W**
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞75Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	28	1594
2	57	398
3	85	177
4	114	100

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	28	1379
2	57	345
3	85	153
4	114	86

36° 3000K



H(m)	D(cm)	Em(lux/klm)
1	61	655
2	123	164
3	184	73
4	246	41


36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35





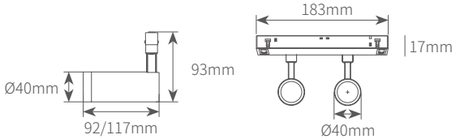

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

SMS4010F/SMS4016F

Product information

Power	**10W/16W**
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞75Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters

15° 3000K

H(m)	D(cm)	Em(lux/klm)
1	28	1594
2	57	398
3	85	177
4	114	100

15° 4000K

H(m)	D(cm)	Em(lux/klm)
1	28	1379
2	57	345
3	85	153
4	114	86


36° 3000K

H(m)	D(cm)	Em(lux/klm)
1	61	655
2	123	164
3	184	73
4	246	41

36° 4000K

H(m)	D(cm)	Em(lux/klm)
1	59	566
2	119	141
3	178	63
4	237	35



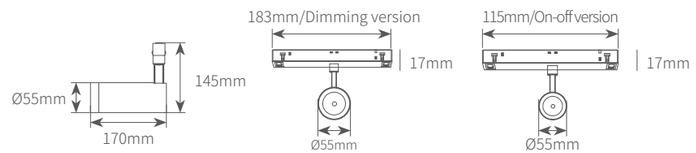

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

SMS5515


Product information

Power	**15W**
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	Ra 90
Finish color	white/black/chrome/brushed copper


Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

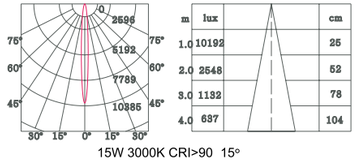

15W 3000K CRI>90 15°

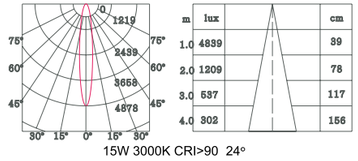


15W 3000K CRI>90 24°

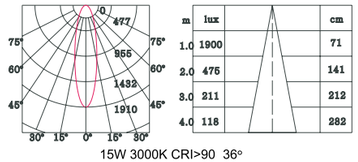

15W 3000K CRI>90 36°





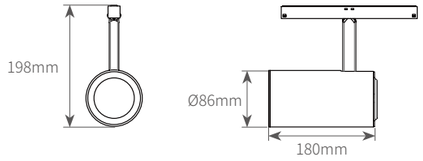

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC

SMS86


Product information

Power	**15W/20W/25W/30W**
Beam angle	15°/24°/36°
Input voltage	24/48V
Input frequency	16KHz
System Luminous flux	＞100Lm/w
CRI	Ra 90
Finish color	white/black/chrome/brushed copper

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track

Light distribution parameters




m	lux	cm
1.0	11580	20
2.0	2895	40
3.0	1286	60
4.0	723	81

Beam Angle=15°



m	lux	cm
1.0	3735	46
2.0	933	93
3.0	415	139
4.0	283	186

Beam Angle=24°

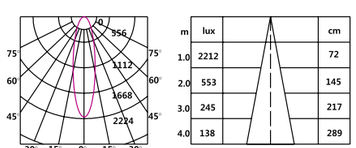


m	lux	cm
1.0	2212	72
2.0	553	145
3.0	245	217
4.0	138	289

Beam Angle=36°





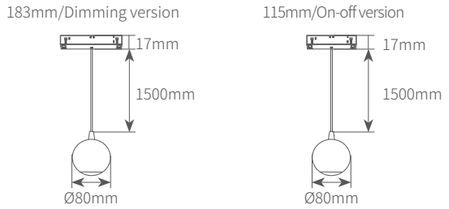

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC

SMP8005

Product information


Power	**5W**
Beam angle	75°
Input voltage	24/48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	rose gold / Pearl black/Chrome

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

75° 3000K




H(m)	D(cm)	Em(lux/klm)
1	161	266
2	321	67
3	482	30
4	642	17

75° 4000K



H(m)	D(cm)	Em(lux/klm)
1	158	293
2	315	73
3	473	33
4	630	18



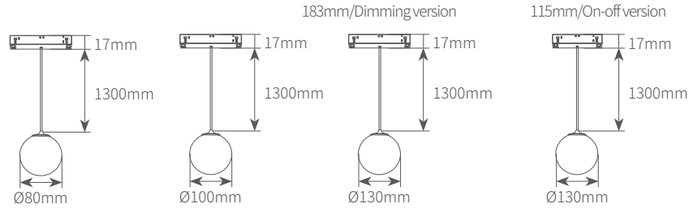

SMP8002/SMP1004/SMP13006

Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC

Product information


Power	**2W/4W/6W**
Beam angle	220°
Input voltage	24/48V
Input frequency	/
System Luminous flux	＞60Lm/w
CRI	＞90/97
Finish color	Cloud white

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

220° 3000K




H(m)	D(cm)	Em(lux/klm)
1	NA	82
2	NA	21
3	NA	9
4	NA	5

220° 4000K



H(m)	D(cm)	Em(lux/klm)
1	NA	85
2	NA	21
3	NA	9
4	NA	5



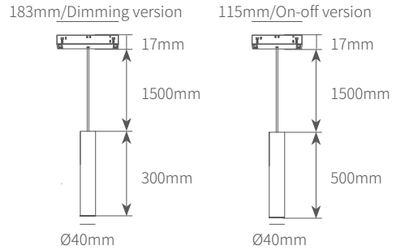

SMP403008/SMP405015



UGR＜11
Flicker free
IP20
2700K
3000K
4000K
1800K-3000K
2700K-6500K
Triac Dimming
Bluetooth
Zigbee
0-10V
DALI
PLC

Product information


Power	**8W/15W**
Beam angle	15°/30°/36°
Input voltage	24/48V
Input frequency	/
System Luminous flux	＞100Lm/w
CRI	＞90/97
Finish color	White/black/brown/grey/green/red/blue

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	36	3173
2	72	793
3	108	353
4	144	198

15° 4000K




H(m)	D(cm)	Em(lux/klm)
1	39	4029
2	77	1007
3	116	448
4	193	252

30° 3000K




H(m)	D(cm)	Em(lux/klm)
1	46	2478
2	92	590
3	138	275
4	184	155

30° 4000K




H(m)	D(cm)	Em(lux/klm)
1	45	3151
2	90	788
3	135	350
4	180	197

36° 3000K




H(m)	D(cm)	Em(lux/klm)
1	65	1475
2	129	368
3	194	164
4	258	92

36° 4000K



H(m)	D(cm)	Em(lux/klm)
1	61	1942
2	123	486
3	184	216
4	245	121



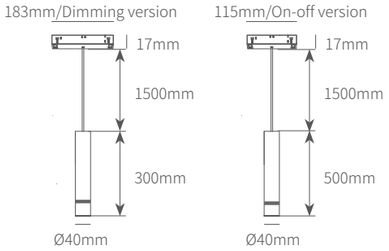

SMP403008F/SMP405015F

UGR＜11 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**8W/15W**
Beam angle	15°-36° zoomable
Input voltage	24/48V
Input frequency	/
System Luminous flux	＞70Lm/w
CRI	＞90/97
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track


Light distribution parameters

15° 3000K




H(m)	D(cm)	Em(lux/klm)
1	29	2052
2	57	513
3	86	228
4	114	128

15° 6000K




H(m)	D(cm)	Em(lux/klm)
1	30	2027
2	60	507
3	90	225
4	121	126

36° 3000K




H(m)	D(cm)	Em(lux/klm)
1	61	837
2	123	209
3	194	93
4	184	52

36° 6000K



H(m)	D(cm)	Em(lux/klm)
1	61	878
2	123	219
3	184	97
4	245	54



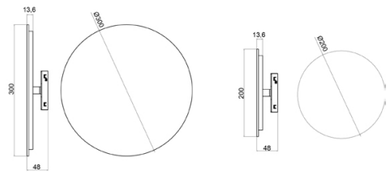

Meera Wall Lamp SMWR2007/SMWR3010

Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information

Power	**7W/10W**
Beam angle	360°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Aluminum
Finish color	White/black/brown/grey/green/red/blue





Flicker free · IP20


2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Light distribution parameters




Fortune Wall Lamp SMWS2005/SMWS3008

Product information

Power	**5W/8W**
Beam angle	360°
Input voltage	48V
Input frequency	/
System Luminous flux	80lm/W
CRI	＞95
Material	Aluminum
Finish color	White/black/brown/grey/green/red/blue



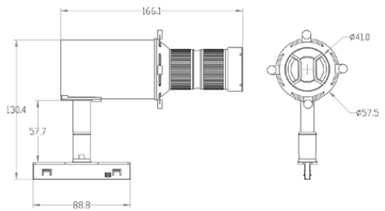

SMS4015FS

Flicker free IP20

2700K 3000K 4000K


1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information	
Power	**15W**
Beam angle	20°-40°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	>80lm/W
CRI	>95
Material	Aluminum
Finish color	Black /white



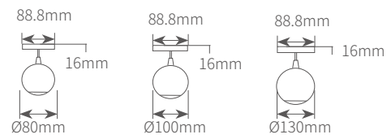

SMB8002/SMB1004/SMB13006

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee


0-10V DALI PLC

Product information	
Power	**2W/4W/6W**
Beam angle	360°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	>80lm/W
CRI	>95
Material	Aluminum
Finish color	Cloud white

CURVE MAGNETIC SYSTEM V6.0





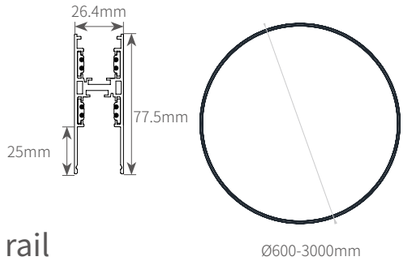

Curve Up & down track rail CLUD600-3000

Product information


Input voltage	24/48V
Finish color	Black/white/brushed coper
Cirle Dimater	Φ600/Φ800/Φ900/Φ1000/Φ1200/Φ1500/Φ1800/ Φ2000/Φ2400/Φ3000mm
Dimension	D600/D800/D900/D1000/D1200/D1500/D1800/ D2000/D2400/D3000*W31*H52mm

Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Pendant





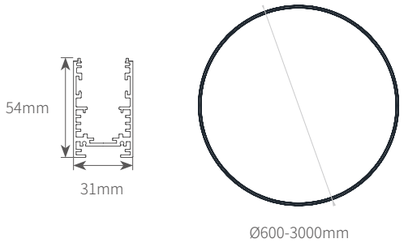

Curve track rail
CL600-3000

Product information


Input voltage	24/48V
Finish color	Black/white/brushed coper
Cirle Dimater	Φ600/Φ800/Φ900/Φ1000/Φ1200/Φ1500/Φ1800/ Φ2000/Φ2400/Φ3000mm
Dimension	D600/D800/D900/D1000/D1200/D1500/D1800/ D2000/D2400/D3000*W31*H52mm

Product performance

Saturation red reduction degree	/
Color Accuracy	/
Color Saturation	/
Color tolerance	/
Light Fixture Material	Aluminium
Installation	Recessed / Surface mount / Pendant







UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

RMS55

Product information


Power	**8W/15W**
Beam angle	15°/24°/36°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞100Lm/w
CRI	90
Finish color	Black/white/brushed copper/Chrome

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track







UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

RSML18006


Product information

Power	**6W**
Beam angle	110°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80Lm/w
CRI	90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track





UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

RSMS0506


Product information

Power	**6W**
Beam angle	24°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80Lm/w
CRI	90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track





UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

RMS0202


Product information

Power	**2W**
Beam angle	24°
Input voltage	DC24V
Input frequency	/
System Luminous flux	＞80Lm/w
CRI	90
Finish color	Sand white / Sand black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Track



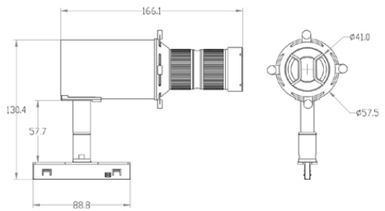

RMS4015FS

Flicker free IP20


2700K 3000K 4000K


1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information	
Power	**15W**
Beam angle	20°-40°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Aluminum
Finish color	Black /white



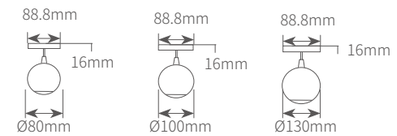

RMB8002/RMB1004/RMB13006

Flicker free IP20


2700K 3000K 4000K

1800K-3000K 2700K-6500K


Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

Product information	
Power	**2W/4W/6W**
Beam angle	360°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Aluminum
Finish color	Cloud white

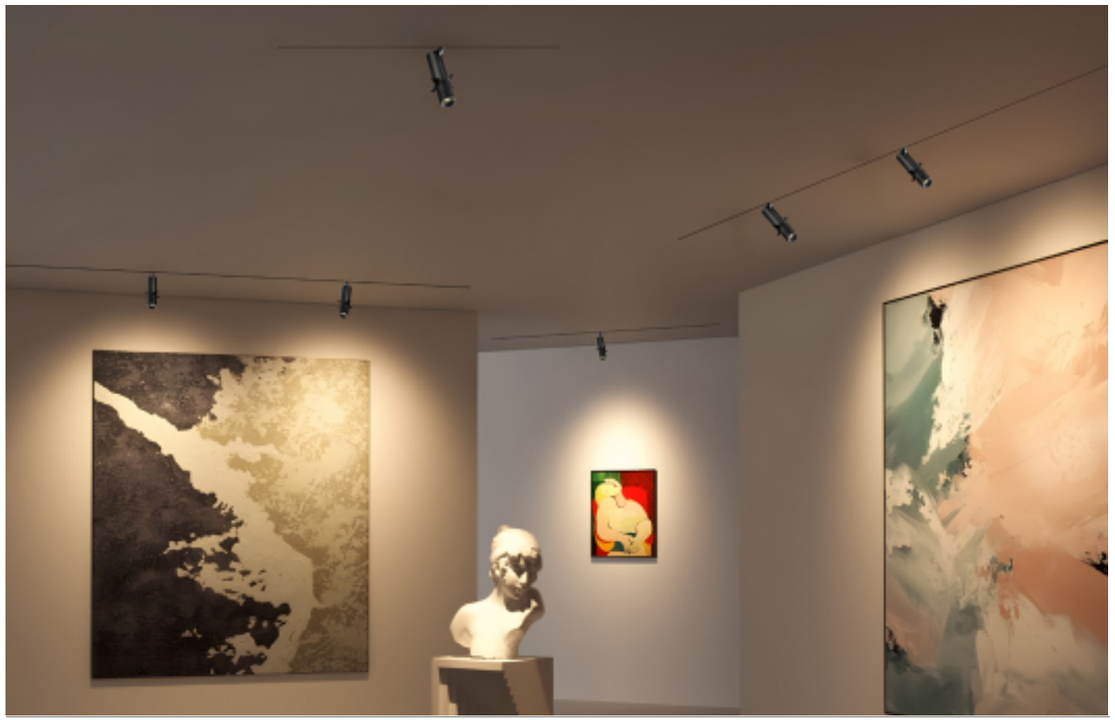





RM7530

Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


Product information	
Power	**30W**
Beam angle	10°-55°
Input voltage	24V/48V
Input frequency	/
System Luminous flux	＞80lm/W
CRI	＞95
Material	Aluminum


Ultra Slim Track Rail &
Accessories V7.0



URC1000A/URC1500A/URC2000A


Product information	
Product Name	**5mm Track Rail**
Description	L=1000/1500/2000mm , PC channel , with 2 cooper bar ,it works on the glass or cabinet
Material	PC & Cooper
Input voltage	48V
Finish color	Black/white






URC1000B/URC1500B/URC2000B

Product information	
Product Name	**5mm Track Rail Aluminum cover**
Description	L=1000/1500/2000mm ,,Aluminium channel , it has to work with the PC channel and cooper bar
Material	Aluminium
Input voltage	/
Finish color	Black/white









URC1000C/URC1500C/URC2000C

Product information	
Product Name	**5mm Track Rail**
Description	L=1000/1500/2000mm , PC channel , with 2 cooper bar ,it works on the glass or cabinet
Material	PC & Cooper
Input voltage	48V
Finish color	Sand white / Sand black/brushed coper



Accessories




Product name
description
Material

UTC9005D
X track connector
fix four track rails as x shape
Aluminium



Product name
description
Material

UTC9004D
T track connector
fix three track rails as T shape
Aluminium



Product name
description
Material

UTC9002D
L vertical track connector
fix two track rails as Vertical L shape
Aluminium



Product name
description
Material

UTC9001D
L horizatal track connector
fix two track rails as horizatal L shape
Aluminium



Product name
description
Material

UTC03D
End Cap
To use for the track rail cover
Plastic



Product name
description
Material

UTC07D
Metal connector kits
Fix two tracks in a line (use togethor with UPL07)
Metal




Product name
description
Material

URCO1
Recessed braket kit
installation accessoires for recessed track
SPCC



L/X/Curve Power joiner


Product information	
Product Name	**UPL08**
Description	L/X/Curve Power joiner
Material	Plastic
Input voltage	48V
Finish color	Black

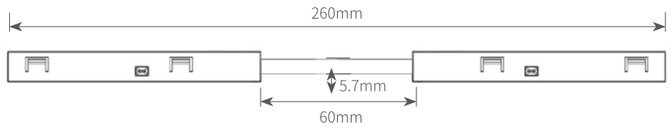



Power feeder


Product information	
Product Name	**UPL05**
Description	Connect power supplier and track rail
Material	Plastic
Input voltage	48V
Finish color	Black

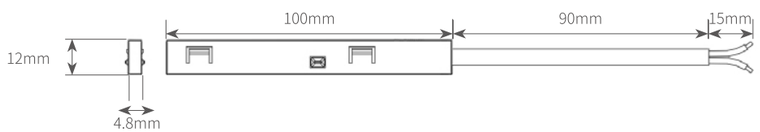




Power Joiner


Product information	
Product Name	**UPL07**
Description	Straight power joiner
Material	Plastic
Input voltage	48V
Finish color	Black






Track mount power supply URSP-100-48

Product information	
Product Name	**100W Track mount Power Supply**
Description	input220-240VAC ,output 48v DC , 100W , Track mount
Material	Aluminium
Input voltage	48V
Finish color	Black/white



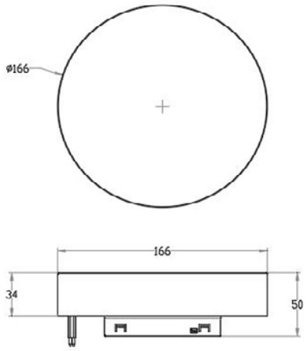



RSP-150-48

Product information	
Product Name	**150W power supply**
Description	Meanwell 150W（Luxury type）input 88-264VAC output 48VDC Approvals：BSMI,CCC,UL,TUV,CB,CE,EMC
Material	Aluminium
Input voltage	48V
Finish color	Sliver



RSP-200-48


Product information	
Product Name	**200W power supply**
Description	Meanwell 200W（Luxury type） input 88-264VAC output 48VDC Approvals：BSMI,CCC,UL,TUV,CB,CE,EMC
Material	Aluminium
Input voltage	48V
Finish color	Sliver



RSP-320-48

Product information	
Product Name	**320W power supply**
Description	Meanwell 320W（Luxury type , with fan ）input 88-264VAC output 48VDC Approvals：BSMI,CCC,UL,TUV,CB,CE,EMC
Material	Aluminium
Input voltage	48V
Finish color	Sliver





UGR＜11　Flicker free　IP20　2700K-6000K

UMLL1010

Product information	
Product Name	**Liner**
Model	UMLL300/UMLL600/UM
Power	3w/5w/10w
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	120°
CRI	>95
Material	Silica Gel
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V





UMLS1210



Black




White









Product information	
Product Name	**Accent Linear Lamp**
Model	UMLS1210
Power	10W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	45°
CRI	>95
Material	Plastic
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

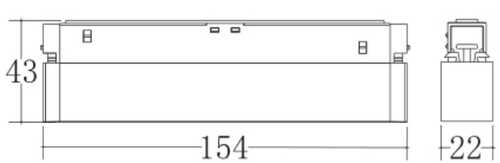



Color for option



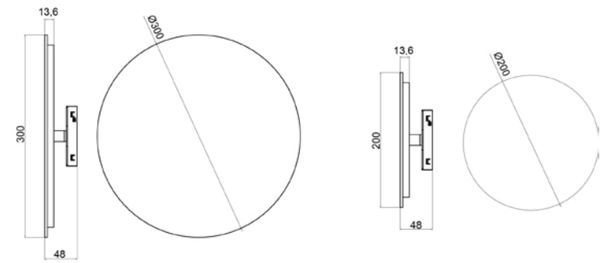



UMWR2007/UMWR3010


Product information	
Product Name	**Meera Wall Lamp**
Model	UMWR2007/UMWR3010
Power	7W/10W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	360°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V











UMWS2005/UMWS3008

Product information	
Product Name	**Fortune Wall Lamp**
Model	UMWS2005/UMWS3008
Power	5W/8W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	360°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

Color for option






Black




White



UMGL1807

Product information	
Product Name	**Gimbal flood linear lamp**
Model	UMGL1807
Power	7W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	110°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

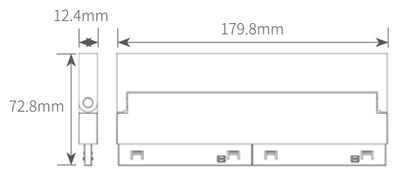







Black Rose golden Sliver



UMP8005


Product information	
Product Name	**Pearl Chandelier**
Model	UMP8005
Power	5W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	80°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

UGR < 11 Flicker free

IP20 2700K-6000K



Black

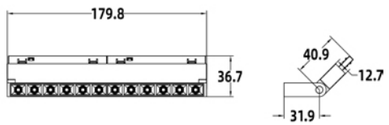

UMGS1207



White

Product information	
Product Name	**Gimbal accent linear lamp**
Model	UMGS1207
Power	7W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	36°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

UGR < 11 Flicker free

IP20 2700K-6000K





UMS4015FS




Black




White

Creating different photosph eric facula



Product information	
Product Name	**Cutting light**
Model	UMS4015FS
Power	15W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15°-60°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

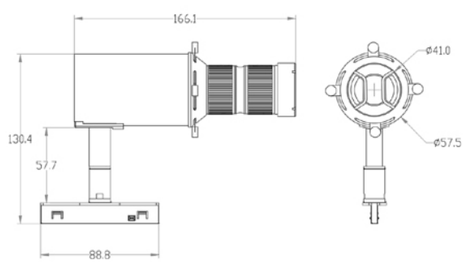

UMS4016




Black



White

Product information	
Product Name	**Spotlight**
Model	UMS4016
Power	16W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15/24/36°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V










Black



White

UMS4005F

Angle zooms from 15-60



15° 30° 40° 60°


UGR < 11

Flicker free

IP20

2700K-6000K

Product information	
Product Name	**Zoomable Spotlight**
Model	UMS4005F
Power	5W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15°-60°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

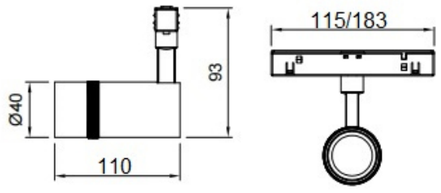



Black



White


UGR < 11

Flicker free

IP20

2700K-6000K

UMS4005



Product information	
Product Name	**Mini Spotlight**
Model	UMS4005
Power	5W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15/24/36°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V







Black

Golden



ϕ130



ϕ100



ϕ80

UMB8002/UMB1004/UMB13006

Product information	
Product Name	**Meteorite Decorative Ball**
Model	/
Power	2W/4W/6W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	360°
CRI	>95
Material	Glass
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V



UGR < 11




Flicker free



IP20



2700K-6000K

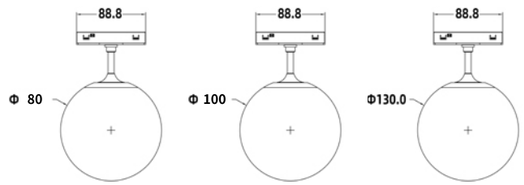



Black

UMS5515

Product information	
Product Name	**High Power Spotlight**
Model	UMS5515
Power	15W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15/24/36°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V



White



Copper



Silver



UGR < 11




Flicker free




IP20



2700K-6000K












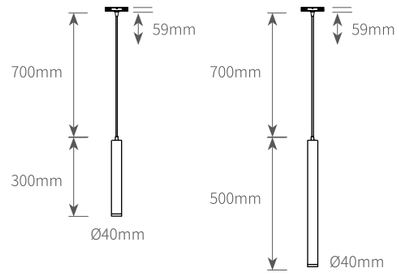

UMP403008/UMP405015


Product information	
Product Name	**Cylinder Pendant Lamp**
Model	/
Power	8W/15W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15°/24°/36°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V


UMP8002/UMP1004/UMP13006



Product information	
Product Name	**Meteorite Decorative Chandelier**
Model	/
Power	2W/4W/6W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	360°
CRI	>95
Material	Glass
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

ϕ130 ϕ100 ϕ80









UMP403008F/UMPZ405015F



Black



White





Black




White

Product information	
Product Name	**Zoomble Cylinder Pendant Lamp**
Model	/
Power	8W/15W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	15°-60°
CRI	>95
Material	Aluminium
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

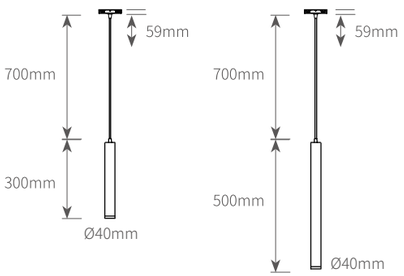





UMLT3006/UMLT6012

Product information	
Product Name	**Dicoration Tube**
Model	UMLT3006/UMLT6012
Power	6W/12W
Input Voltage	48V
LED / CCT / Lumens	2700K | 3000K | 4000K | 6000K
Beam Angle	80°
CRI	>95
Material	Aluminum & PC
Dim	Non-dim/DALI/Blue tooth/Triac/0-10V

UGR < 11

IP20

2700K-6000K






ARMANI RECESSED LINEAR SERIES







LMN0608

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC


Product information


Power	**8W**
Beam angle	25°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞70Lm/w
CRI	Ra＞90
Finish color	White+Grey

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below



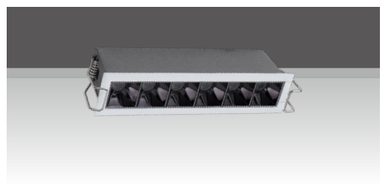





LMN1212

UGR＜19 · Flicker free · IP20

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC


Product information


Power	**12W**
Beam angle	25°/36°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞70Lm/w
CRI	Ra＞90
Finish color	White+Grey

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	Recessed

Schematic diagram below



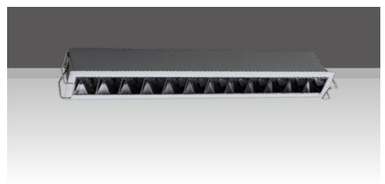

LED FLEXIBLE STRIP SERIES

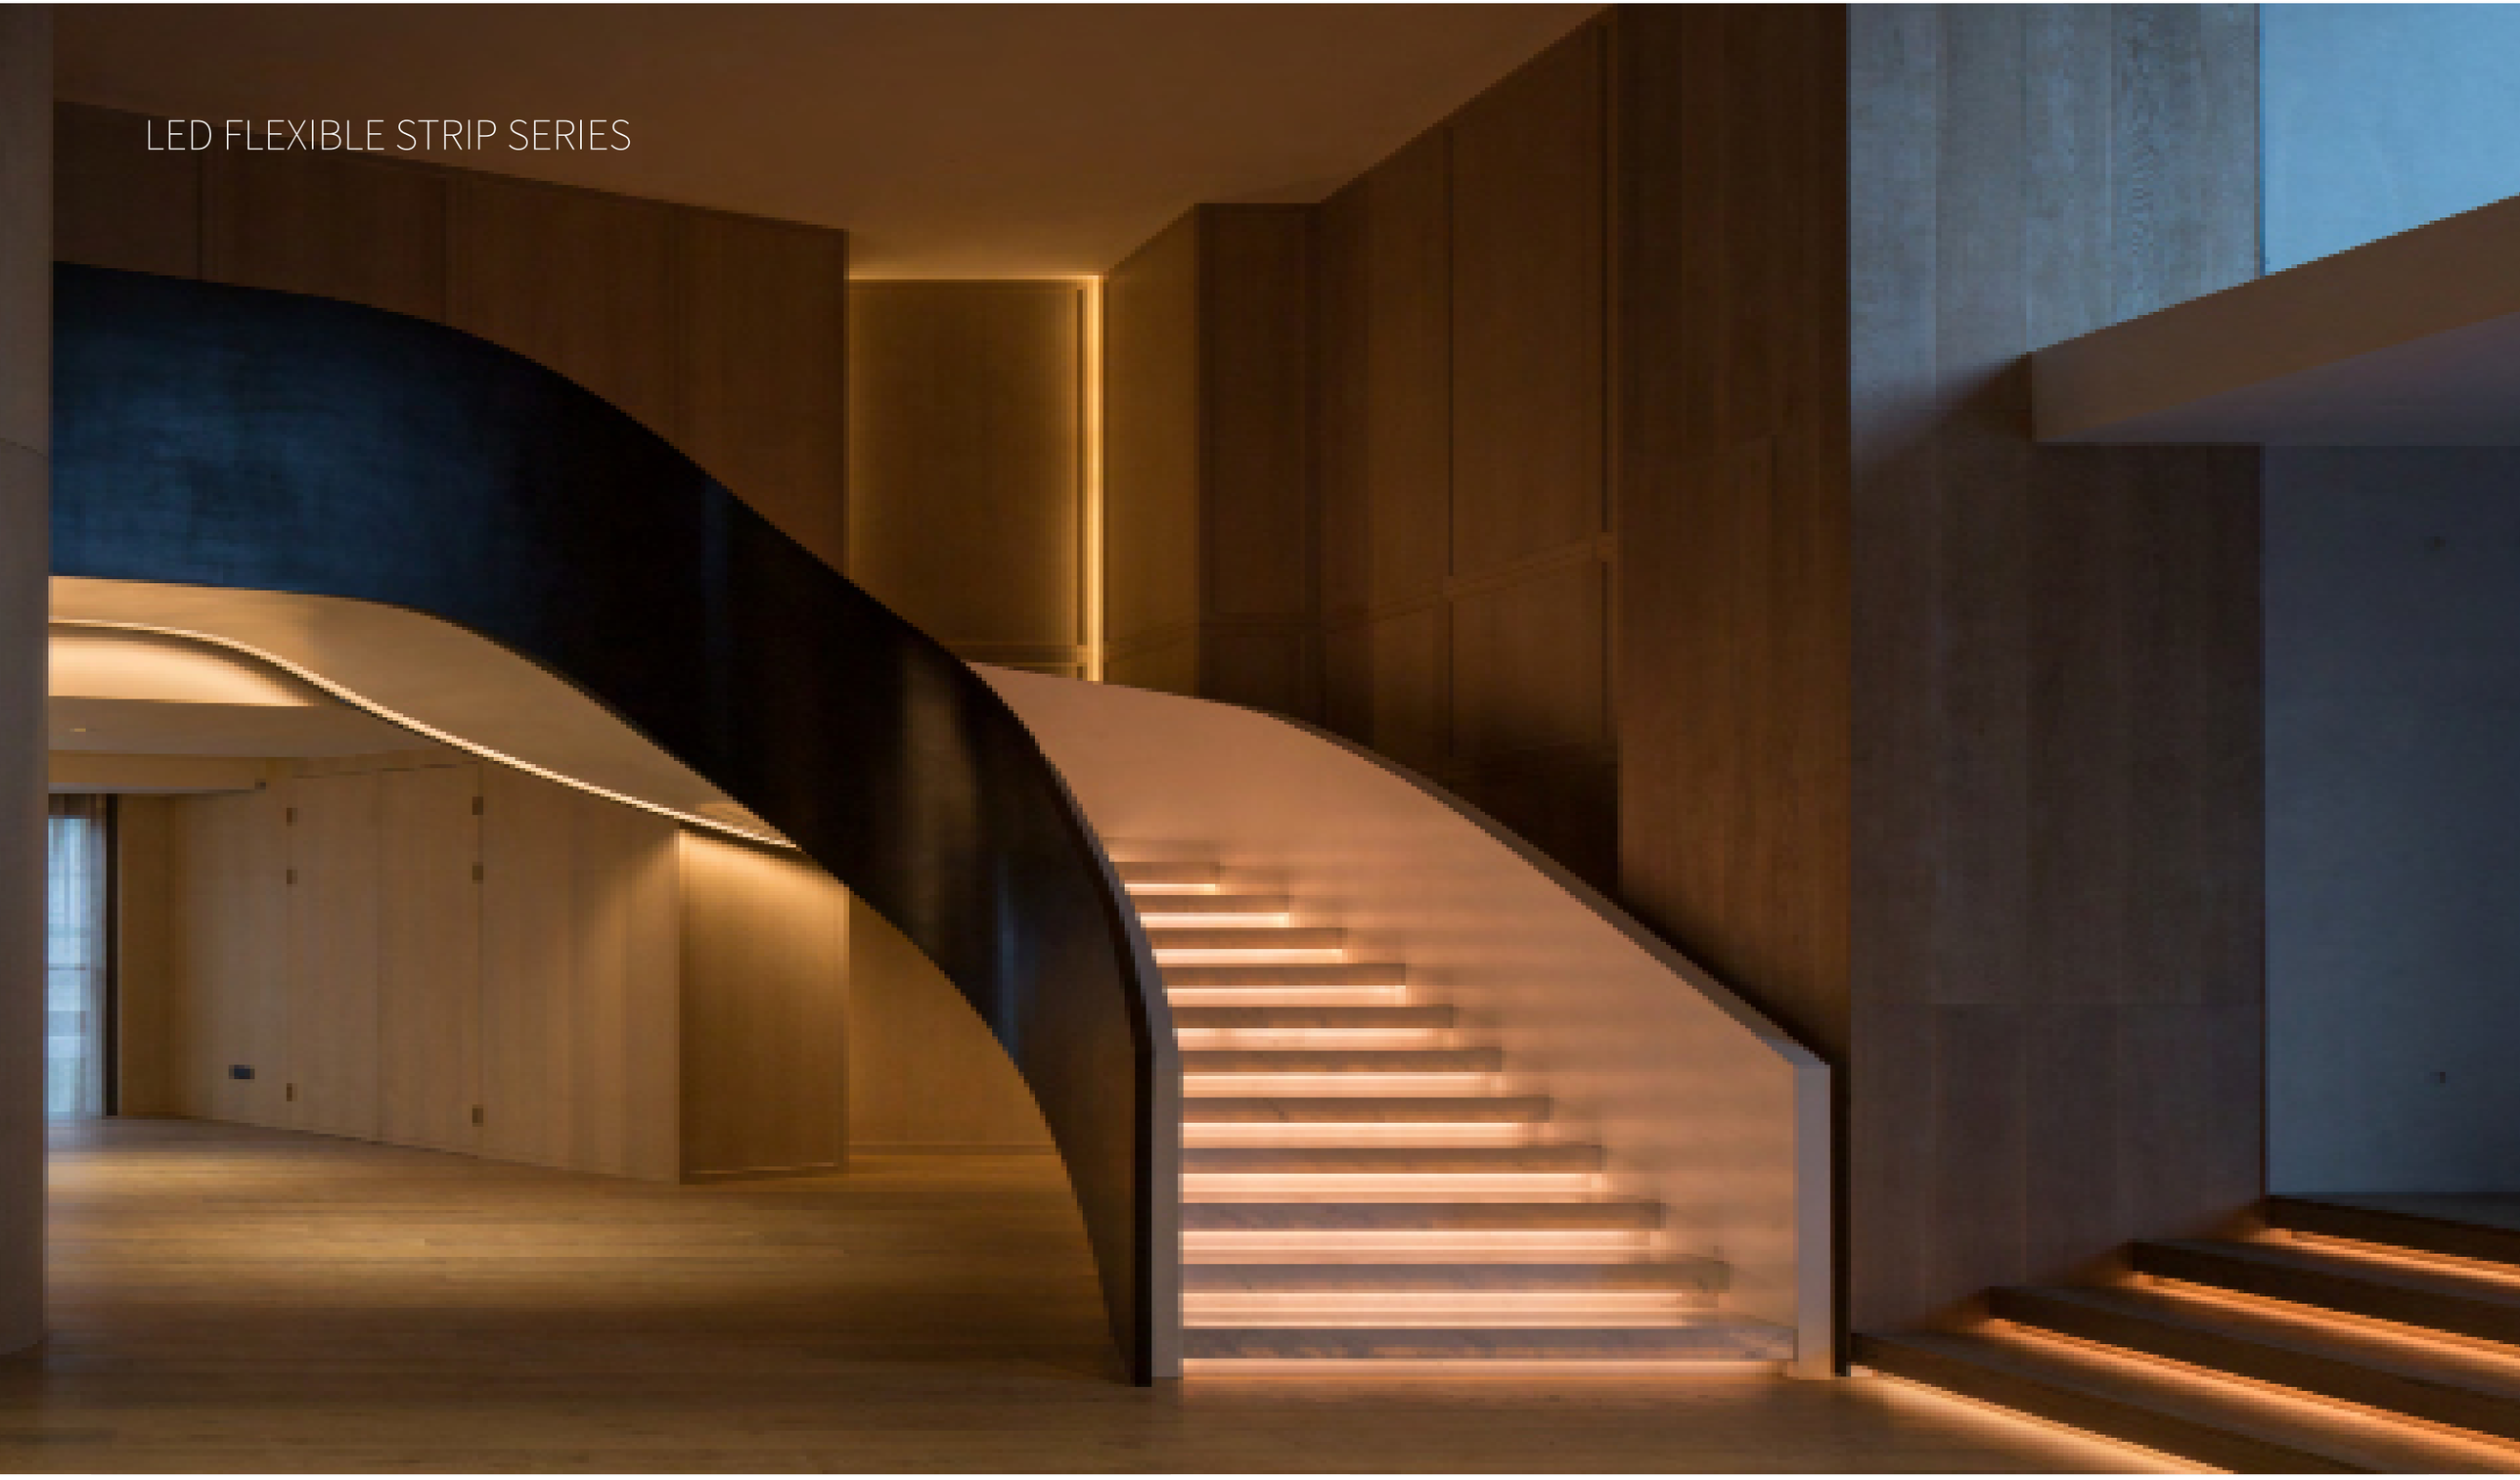

LB2835-24/08-10W-120D



IP20/65

2700K 3000K 3500K 4000K 5000K 6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC

Product information

Power	**10W/m**
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞95Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

LB2835-24/08-12W-120S



IP20/65

2700K 3000K 4000K 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC

Product information

Power	**12W/m**
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞75Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

FS2835-24/08-10W-120D



IP20/65

2700K 3000K 3500K 4000K 5000K 6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC

Product information

Power	**10W/m**
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞95Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

FS2835-24/08-12W-120S



IP20/65

2700K 3000K 4000K 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC

Product information

Power	**12W/m**
LED QTY	120LED/m
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞75Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

LB5050-24/12-12W-60RGB



RGB IP20/65

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

Product information

Power	**12W/m**
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	＞90Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

LB5050-24/12-15W-60RGBW



RGB 3500K IP20/65

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

Product information

Power	**15W/m**
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	＞72Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

LB5050-24/12-12W-60RGBCW



RGB 3500K 6000K IP20/65

Triac Dimming Bluetooth Zigbee


1~10V DALI PLC

Product information

Power	**12W/m**
LED QTY	60LED/m
Input voltage	DC24V
PCB width	12mm
System Luminous flux	＞90Lm/w
CRI	Ra＞90/95
Cut length	One LED one cut

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	/
Installation	Paving or aluminum groove

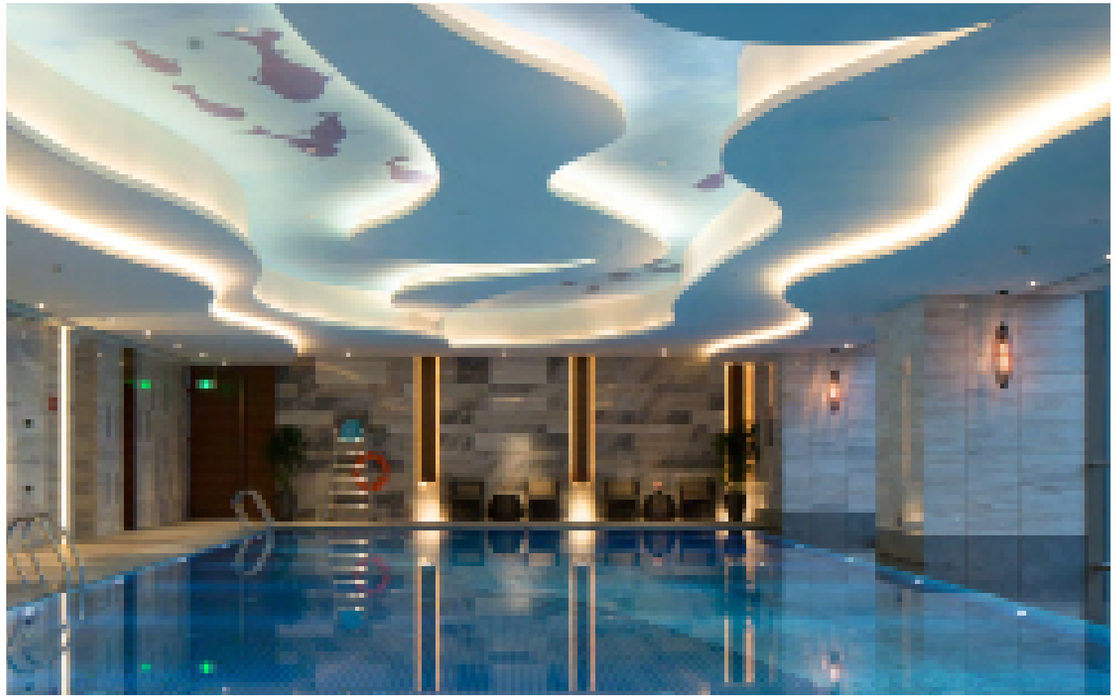



NFS0508-S



IP20/65 120°


2700K 3000K 4000K 2700K-6500K


Triac Dimming Bluetooth Zigbee


1~10V DALI PLC


| Product information


Power	**10W/m**
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞300Lm/m
CRI	Ra＞80/90/95
Cut length	One LED one cut














Recommended accessories



Solder-free terminal wire



Profile



keel



welding wire


Tail plug

plug




glue

CE LVD GB

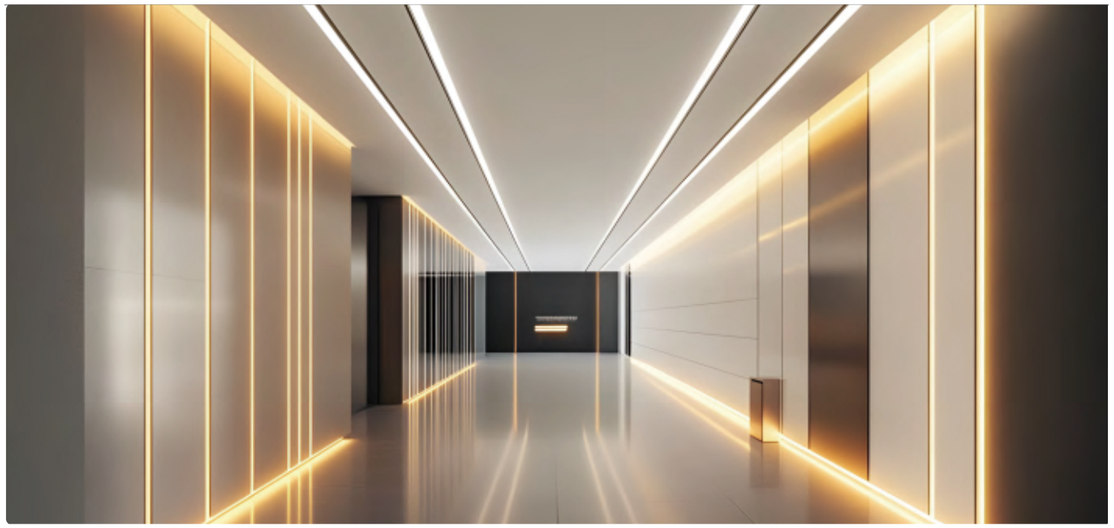

NFS1616

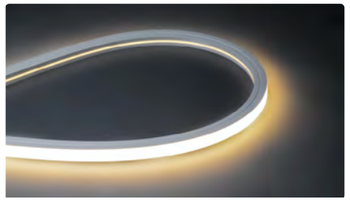

IP20/65 120°


2700K 3000K 4000K 2700K-6500K


Triac Dimming Bluetooth Zigbee


1~10V DALI PLC


| Product information


Power	**12W/m**
Input voltage	DC24V
PCB width	12mm
System Luminous flux	＞750Lm/m
CRI	Ra＞80/90/95
Cut length	One LED one cut














Recommended accessories



Solder-free terminal wire



Profile



keel



welding wire


Tail plug

plug



glue

CE LVD GB

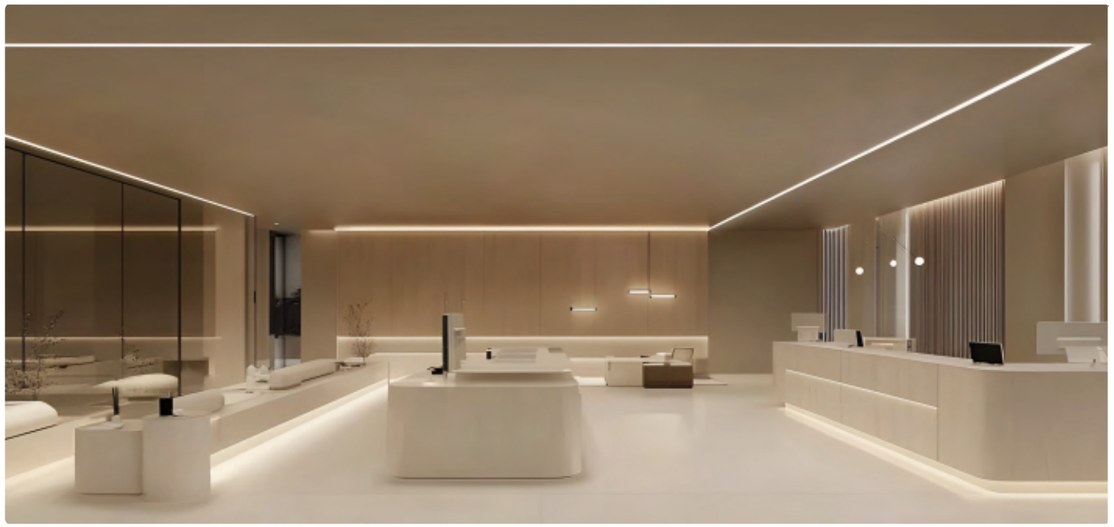

NFS2020



| Product information


Power	**12W/m**
Input voltage	DC24V
PCB width	10mm
System Luminous flux	＞650Lm/m
CRI	Ra＞80/90/95
Cut length	One LED one cut


IP20/65 120°


2700K 3000K 4000K 2700K-6500K


Triac Dimming Bluetooth Zigbee


1~10V DALI PLC














Recommended accessories



Solder-free terminal wire



Profile



keel



welding wire

Tail plug

plug



glue

CE LVD GB



NFSR25



| Product information


Power	**13W/m**
Input voltage	DC24V
PCB width	8mm
System Luminous flux	＞480Lm/m
CRI	Ra＞80/90/95
Cut length	One LED one cut


IP20/65 120°

2700K 3000K 4000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC





Recommended accessories



welding wire



plug



Tail plug

clip





glue

CE LVD GB

LINEAR PROFILE SERIES







M1010

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee


0~10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

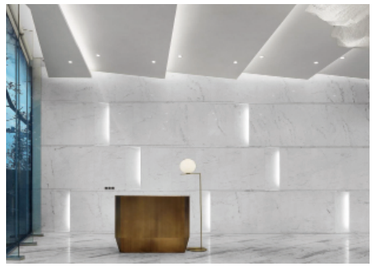

Installation steps







M1213

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee


0~10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

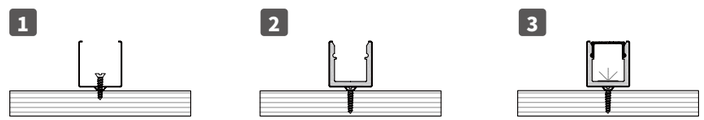





UGR < 11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

M2010

standard length of aluminum groove：1m/1.5m/2m

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps







UGR < 11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

M3535


standard length of aluminum groove：1m/1.5m/2m

Product information


Power	**24W/36W/48W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black


Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted

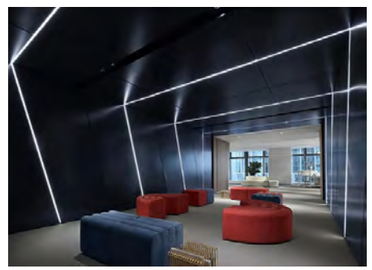

Installation steps

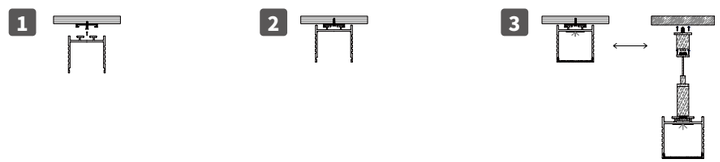





M3626

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**Up 10/12.5/18W + Down 10/12.5/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

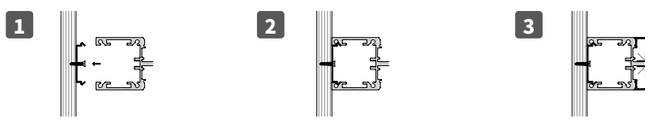





M1616

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

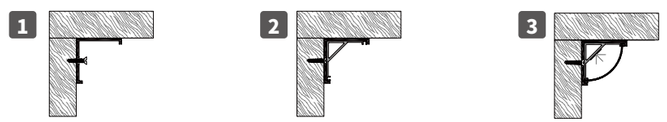



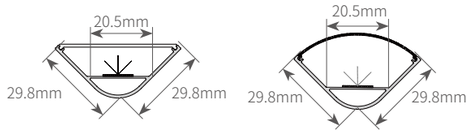

M3030

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee


0-10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

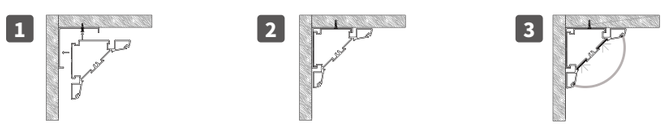





M5036

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee


0-10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Surface Mounted



Installation steps

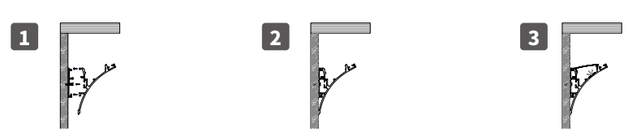





UGR＜11 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

C5315

standard length of aluminum groove：1m/1.5m/2m

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps







UGR＜11 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

C5022

standard length of aluminum groove：1m/1.5m/2m

Product information

Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps





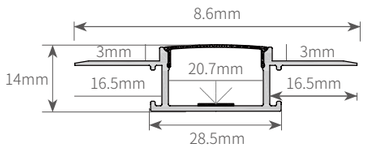

C6214

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps







C8016

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps

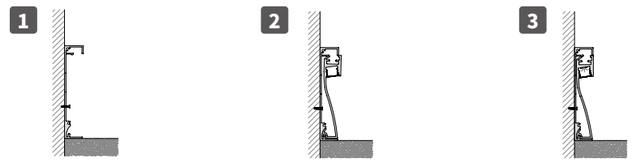





C9719

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**10W/12.5W/18W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black


Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps

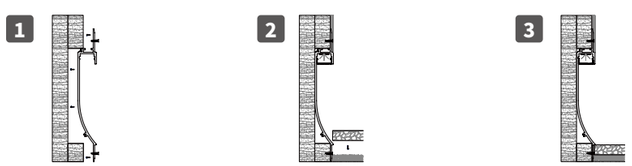





C8958

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information


Power	**24W/36W/48W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance


Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed



Installation steps

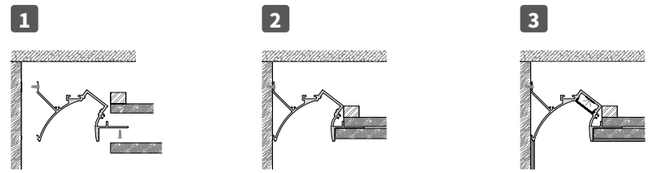





C9835

standard length of aluminum groove：1m/1.5m/2m

UGR＜11 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee


0-10V · DALI · PLC

Product information


Power	**24W/36W/48W**
Beam angle	110°
Input voltage	DC 24V
Input frequency	50/60Hz
System Luminous flux	＞100Lm/w
CRI	Ra＞90
Length	1000/1500/2000mm
Finish color	white/silver/black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium + PC diffuser
Installation	Recessed




Installation steps

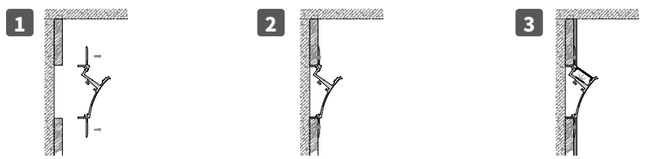







BM4375

Product information

Power	**36W**
Beam angle	30°/110°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200xW43xH75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod


UGR＜15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC



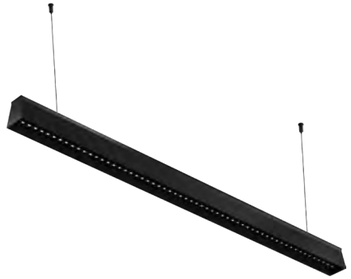

M6270

Product information

Power	**36W**
Beam angle	15/30/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞75Lm/w
CRI	Ra＞90
Lamp size	L1200xW62xH70mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod

UGR＜15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC



UGR<15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BMS74100

Product information

Power	**30W/45W**
Beam angle	12°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W74×H100mm/L1800×W74×H100mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR<15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BML74100

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W74×H100mm/L1800×W74×H100mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BMS8979


Product information

Power	**30W/45W**
Beam angle	12°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W89×H79mm/L1800×W89×H79mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod





UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BML8979

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	85Lm/w
CRI	Ra＞90
Lamp size	L1200×W89×H79mm/L1800×W89×H79mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR<15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BMS8080

Product information

Power	**30W/45W**
Beam angle	12°/24°/38°/50°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W80×H80mm/L1800×W80×H80mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR<15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BML8080

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W80×H80mm/L1800×W80×H80mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod





UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BMS3090

Product information

Power	**30W/45W**
Beam angle	15°/30°/45°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W38×H90mm/L1800×W38×H90mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BML3090

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W38×H90mm/L1800×W38×H90mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



BM7080

UGR＜15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×70W×80Hmm/L1800×W70×H80mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod







BM5075

UGR＜15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W50×W75mm/L1800×W50×H75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR＜15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


BM7575

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W75×H75mm/L1800×W75×H75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod

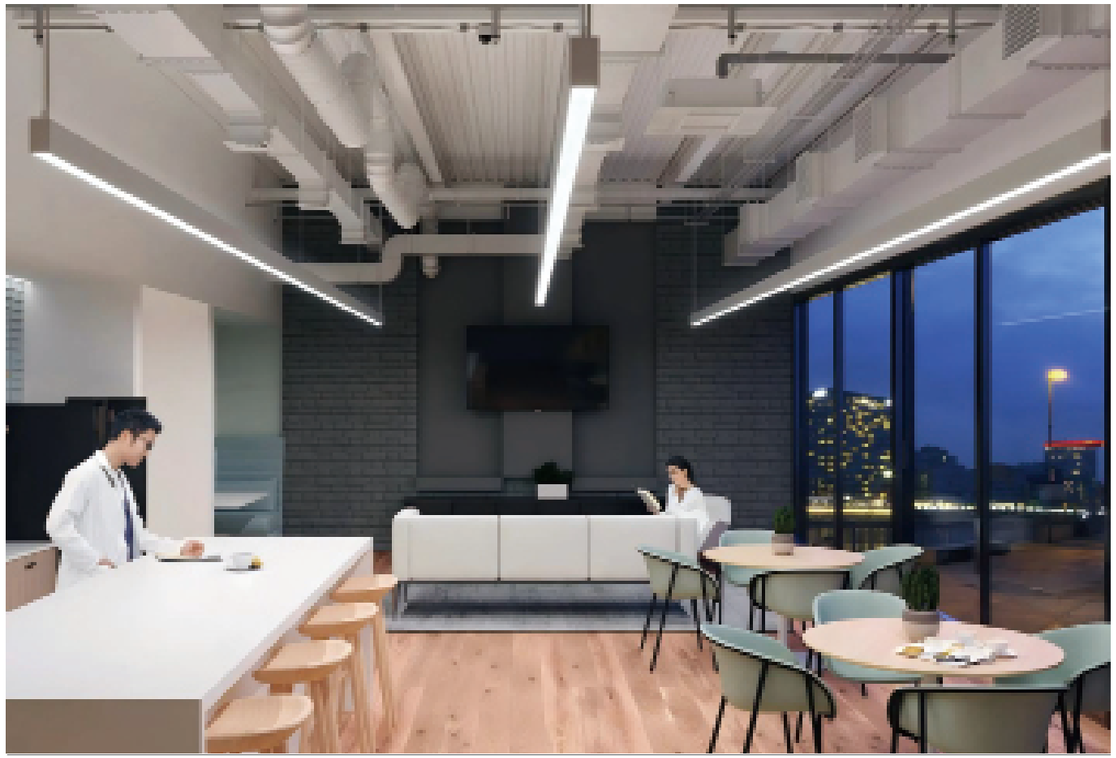



UGR＜15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BM10075

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W100×H75mm/L1800×W100×H75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod





UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC

BM10257

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W102×H57mm/L1800×W102×H57mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0~10V · DALI · PLC


BM8075

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×W80×H75mm/L1800×W80×H75mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod

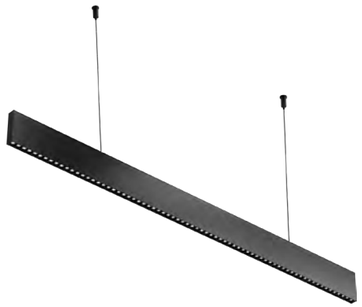

UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BM1670

Product information	
Power	**36W**
Beam angle	15/30/45°
Input voltage	AC 200-240V
Input frequency	50Hz
System Luminous flux	＞75Lm/w
CRI	Ra＞90
Lamp size	L1200xW16xH70mm
Finish color	White/Silver/Black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR < 15 · Flicker free · IP20

3000K · 4000K · 2700K-6000K

Triac Dimming · Bluetooth · Zigbee

0-10V · DALI · PLC

BM60A

Product information	
Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×￠60mm/L1800×￠60mm
Finish color	White/Silver/Black

Product performance	
Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod



UGR<15 Flicker free IP20

3000K 4000K 2700K-6000K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

BM60

Product information

Power	**30W/45W**
Beam angle	110°
Input voltage	AC 200-240V
Input frequency	50/60Hz
System Luminous flux	＞85Lm/w
CRI	Ra＞90
Lamp size	L1200×￠60mm/L1800×￠60mm
Finish color	White/Silver/Black

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension wire/suspension rod







Magic Wand Floor Lamp

The Magic Wand Floor Lamp delivers powerful, versatile lighting—almost like magic. It is specially designed for homes, hotels, and office environments

- **Dual-Section Rotating Design**
  The lamp features an upper and lower section, and each section can rotate freely to direct light exactly whereyou need it.
- **Modular Lighting System**
  Its fully modular light design allows you to install any lighting module you prefer. Options include decorative bulbs, spotlights, linear lights, flexible lights, and a large top lamp. All modules are wireless, making them extremely easy to install, remove, and replace.
- **Touch Sensor Control**
  A touch sensor is located at the center of the lamp post. Simply tap to turn the lamp on or off, and slide or hold to adjust the brightness.

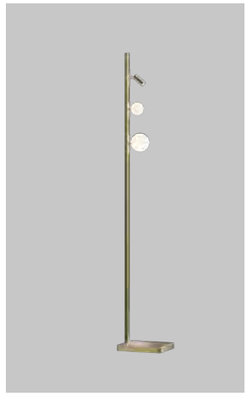




FL07-1

Product information


Power	**12-63W**
Charge Voltage	DC24V,maximum 1.5A
Battery & Capacity	Lithium Battery 9000mA
Charging Time	8H
Working Hours	15-30H
CRI	Ra＞90
Finish color	White+Black+Grey



Product performance

Protection IP	IP20
Dimming method	Sensor Touch
Pord Funcation	Rotate freely
Light Fixture Material	Aluminium
Installation	Wireless & Tool free

Product Color





Tips

Touch Switch:
Tap the touch sensor once to turn the light on.Tap it again to turn the light off.
Press and hold for more than 3 seconds to increase the brightness to its maximum level; it will sto increasing once the maximum is reached.
Press and hold again to gradually decrease the brightness. Release the touch at any time to set the brightness at the current level.
If you continue holding for more than 3 seconds during dimming, the brightness will decrease to the minimum level (2%) and stop.

Charging Instructions:
It is recommended to use a DC 24V / 1.25A charging adapter.
The red indicator light turns on while charging.
The green indicator light turns on when charging is complete.
After unplugging the charger, all indicator lights will turn off.



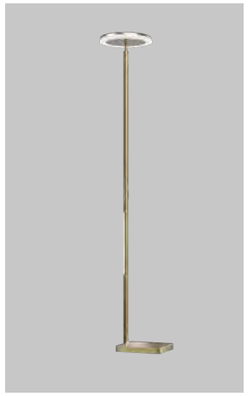



FL07-2

Product information

Power	**12-63W**
Charge Voltage	DC24V,maximum 1.5A
Battery & Capacity	Lithium Battery 9000mA
Charging Time	8H
Working Hours	15-30H
CRI	Ra＞90
Finish color	White+Black+Grey

UGR＜19 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K


Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

Product performance

Protection IP	IP20
Dimming method	Sensor Touch
Pord Funcation	Rotate freely
Light Fixture Material	Aluminium
Installation	Wireless & Tool free

Product Color





Tips

Touch Switch:
Tap the touch sensor once to turn the light on.Tap it again to turn the light off.
Press and hold for more than 3 seconds to increase the brightness to its maximum level; it will sto increasing once the maximum is reached.
Press and hold again to gradually decrease the brightness. Release the touch at any time to set the brightness at the current level.
If you continue holding for more than 3 seconds during dimming, the brightness will decrease to the minimum level (2%) and stop.

Charging Instructions:
It is recommended to use a DC 24V / 1.25A charging adapter.
The red indicator light turns on while charging.
The green indicator light turns on when charging is complete.
After unplugging the charger, all indicator lights will turn off.



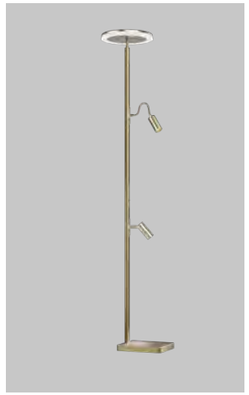




FL07-3

Product information

Power	**12-63W**
Charge Voltage	DC24V,maximum 1.5A
Battery & Capacity	Lithium Battery 9000mA
Charging Time	8H
Working Hours	15-30H
CRI	Ra＞90
Finish color	White+Black+Grey






Product performance

Protection IP	IP20
Dimming method	Sensor Touch
Pord Funcation	Rotate freely
Light Fixture Material	Aluminium
Installation	Wireless & Tool free

Product Color



Tips

Touch Switch:
Tap the touch sensor once to turn the light on.Tap it again to turn the light off.
Press and hold for more than 3 seconds to increase the brightness to its maximum level; it will sto increasing once the maximum is reached.
Press and hold again to gradually decrease the brightness. Release the touch at any time to set the brightness at the current level.
If you continue holding for more than 3 seconds during dimming, the brightness will decrease to the minimum level (2%) and stop.

Charging Instructions:
It is recommended to use a DC 24V / 1.25A charging adapter.
The red indicator light turns on while charging.
The green indicator light turns on when charging is complete.
After unplugging the charger, all indicator lights will turn off.

CLASSROOM LIGHT
PANEL LIGHT
HIGHBAY AND STADIUM LIGHT SERIES





UGR＜11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

MOL-HB-040-N01

Product information

Power	**28W/32W/36W/40W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod



UGR＜11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

MOLHB-040-N02

Product information

Power	**28W/32W/36W/40W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod



UGR＜11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

MOL-JS-040-N01

Product information

Power	**28W/32W/36W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod/ceiling/wire suspension



UGR＜11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0~10V DALI PLC

MOL-JS-040-N02

Product information


Power	**28W/32W/36W/40W/54W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod







UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC


MOL-JS-040-N02

Product information

Power	**28W/32W/36W/40W/54W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod/recessed/ceiling/wire suspension/ suspension ring



UGR<11 Flicker free IP20

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

0-10V DALI PLC

MOL-JS-036-N04

Product information

Power	**28W/32W/36W/40W**
Beam angle	/
Input voltage	AC 200-240V
Input frequency	/
System Luminous flux	/
CRI	Ra＞90
Finish color	White+Titanium

Product performance

Saturation red reduction degree	R9=90
Color Accuracy	Rf≥92
Color Saturation	Rg=99
Color tolerance	SDCM＜3
Light Fixture Material	Aluminium
Installation	suspension rod/recessed/ceiling/wire suspension/ suspension ring


01

Wall & Step light







OUTER DIMENSIONS & ACCESSORIES




WLS50160



WLS60180



WLS75240



WLS100280

LED COLOUR TEMPERATURE

2200K-6500K

OPTICS



18° 22° 30° 60°

MATERIAL SPECIFICATIONS

Housing	ACD12# Die-cast aluminum Powder-coated sand black/matte white/Silver
Light source	CREE
Glass	Tempered glass T=6.0MM
Power cable	0.5m H05RN-F 2X1.0mm2 / 0.5m H05RN-F 3X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
WLS50160	2*5W CREE 1304 (Dual head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	10W	2*450LM
				220-240VAC	8.2W	
				220-240VAC Triac Dim	8.2W	
WLS60180	2*8W CREE 1512 (Dual head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	18W	2*720LM
				220-240VAC	16W	
				220-240VAC Triac Dim	16W	
WLS75240	2*13W CREE 1512 (Dual head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	25W	2*1170LM
				220-240VAC	25W	
				220-240VAC Triac Dim	25W	
WLS100280	2*18W CREE 1820 (Dual head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	38W	2*1800LM
				220-240VAC	36W	
				220-240VAC Triac Dim	36W	







OUTER DIMENSIONS & ACCESSORIES




WL50160



WL60180



WL75240




WL100280

LED COLOUR TEMPERATURE

2200K-6500K

OPTICS



18° 22° 30° 60°

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated sand black/sand white
Light source	CREE (double head)
Glass	Tempered glass T=6.0MM
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA


Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
WL50160	2*4W CREE (Double head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	10W	2*408LM
				220-240VAC	8.2W	
				220-240VAC Triac Dim	8.2W	
WL60180	2*8W CREE (Double head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	18W	2*800LM
				220-240VAC	16W	
				220-240VAC Triac Dim	16W	
WL75240	2*13W CREE (Double head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	25W	2*1386LM
				220-240VAC		2*1082LM
				220-240VAC Triac Dim		2*1082LM
WL100280	2*18W CREE (Double head)	2200K-6500K	18°/22°/ 30°/60°	24VDC	38W	2*1919LM
				220-240VAC	36W	2*1788LM
				220-240VAC Triac Dim	36W	2*1788LM







OUTER DIMENSIONS & ACCESSORIES



LED COLOUR TEMPERATURE

2200K-6500K/R/G/B/Amber

OPTICS



80°

MATERIAL SPECIFICATIONS


Housing	ACD12# Die-cast aluminum Powder-coated sand black/matte white/Silver
Light source	OSRAM/CREE
Glass	Tempered glass T=2.0MM
Power cable	0.35m H05RN-F 2x1.0mm2/ 0.35m H05RN-F 3X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
ST7853	1x2W OSRAM/CREE	2200K-6500K /R/G/B/Amber	80°	12/24VDC 100-256VAC	2W	60LM
STS7853	1x2W OSRAM/CREE	2200K-6500K /R/G/B/Amber	80°	12/24VDC 100-256VAC	2W	60LM
STF7853	1x2W OSRAM/CREE	2200K-6500K /R/G/B/Amber	80°	12/24VDC 100-256VAC	2W	60LM
STFS7853	1x2W OSRAM/CREE	2200K-6500K /R/G/B/Amber	80°	12/24VDC 100-256VAC	2W	60LM

OUTER DIMENSIONS & ACCESSORIES



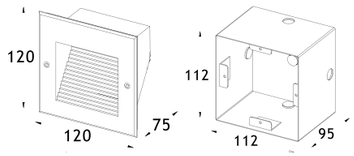

STS120120

LED COLOUR TEMPERATURE

2200K-6500K

OPTICS



120°

MATERIAL SPECIFICATIONS


Housing	ACD12# Die-cast aluminum Powder-coated 877#
Light source	OSRAM
Glass	Tempered glass /frosted
Power cable	0.5m H05RN-F 2x0.5mm2 / 0.5m H05RN-F 3X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
STS120120	16SMD OSRAM	2200K-6500K	120°	12/24VDC 240V/120V	1.6W	35LM
	16SMD OSRAM	2200K-6500K	120°	12/24VDC 240V/120V	3W	75LM

OUTER DIMENSIONS & ACCESSORIES



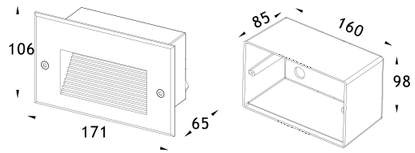

STS171106

LED COLOUR TEMPERATURE

2200K-6500K

OPTICS



120°


MATERIAL SPECIFICATIONS


Housing	ACD12# Die-cast aluminum Powder-coated 877#
Light source	OSRAM
Glass	Tempered glass /frosted
Power cable	0.5m H05RN-F 2x0.5mm2 / 0.5m H05RN-F 3X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
STS171106	24SMD OSRAM	2200K-6500K	120°	12/24VDC 240V/120V	2.4W	47LM
	24SMD OSRAM	2200K-6500K	120°	12/24VDC 240V/120V	6W	132LM

OUTER DIMENSIONS & ACCESSORIES





WL7362

LED COLOUR TEMPERATURE

2200K-6500K/R/G/B/Amber

OPTICS



3*170°


MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated sand black/matte white/Silver
Light source	OSRAE/CREE
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
WL7362	1*3W CREE	2200K-6500K/ R/G/B/Amber	3*170°	12/24VDC	2.5W	127LM
	1*3W CREE	2200K-6500K/ R/G/B/Amber	3*170°	220-240VAC	3.2W	171LM
	3*2W CREE	2200K-6500K/ R/G/B/Amber	3*170°	12/24VDC	6W	321LM
	3*2W CREE	2200K-6500K/ R/G/B/Amber	3*170°	220-240VAC	6W	321LM
	3*2.5W OSRAM	RGB3IN1 DMX512	3*170°	24VDC	8W	/
	3*2.5W OSRAM	RGBW 4IN1 DMX512	3*170°	24VDC	10W	/

OUTER DIMENSIONS & ACCESSORIES





WL92130

LED COLOUR TEMPERATURE

2200K-6500K/R/G/B/Amber

OPTICS



3*170°

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated sand black/matte white/Silver
Light source	OSRAM/CREE
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
WL92130	6*2W	2200K-6500K /R/G/B/Amber	3*170°	12/24VDC	12W	660LM
	6*2W			240V/120V		
	6*2.5W	RGB3IN1DMX512	3*170°	24VDC	15W	/
	6*3.5W	RGBW 4IN1DMX512		24VDC	20W	




02
Adjustable Inground light

LED COLOUR TEMPERATURE

2700-6000K R/G/B DMX512



OPTICS



15° 24° 36° 60°


MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black
Light source	CREE
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2 0.5m H07RN-F 2x1.0mm2 0.5m H07RN-F 3x1.0mm2 0.5m H07RN-F 3x1.0mm2 0.5m H07RN-F 4x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67


TECHNICAL DATA


Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
IG130133	1X6W CREE 1304	2700-6000K R/G/B	15°/24°/ 36°/60°	24VDC 240V/120V	6.8W	429lm
	1X6W CREE 1304	2700-6000K R/G/B	15°/24°/ 36°/60°	220-240VAC 24VDC	6.8W	429lm

PHOTOMETRIC CURVES

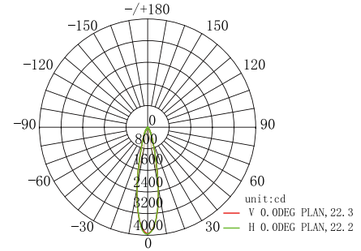

AVERAGE BEAM ANGLE(50%) : 22.3 DEG






Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

03
Inground Light

OUTER DIMENSIONS & ACCESSORIES





2010R

LED COLOUR TEMPERATURE

2700-6000K R/G/B

OPTICS



120°

MATERIAL SPECIFICATIONS


Housing	6063# aluminum /316# SUS
Light source	OSRAM/CREE
Glass	White Acrylic
Power cable	0.25m H05RN-F 2X0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
2010R	1x0.3W OSRAM/CREE	2700-6000K R/G/B	120°	12VDC	0.5W	11LM



OUTER DIMENSIONS & ACCESSORIES





2030R

LED COLOUR TEMPERATURE

2700-6000K R/G/B

OPTICS



30° 60° 120°

MATERIAL SPECIFICATIONS


Housing	6063# aluminum /316#SUS
Light source	OSRAM/CREE
Glass	White Acrylic
Power cable	0.25m H05RN-F 2X0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
2030R	1x1W OSRAM/CREE	2700-6000K R/G/B	120°	24V/12VDC	1W	66LM
			30°/60°			

OUTER DIMENSIONS & ACCESSORIES








2045R

LED COLOUR TEMPERATURE

2700-6000K R/G/B
RGB 3in1

OPTICS



15° 25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	6063# Aluminum Anodizing Silver
Light source	OSRAM/CREE/EPISTAR
Glass	Tempered glass
Power cable	0.25m H05RN-F 2X0.5mm2/0.5m H05RN-F 3X1.0mm2 0.5m H05RN-F 4X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
2045R	1x2W OSRAM/CREE	2700-6000K R/G/B	15/25/ 40/60°	24V/12VDC	2W	130LM
				240V/120V		
	1x3W EPISTAR	RGB 3in1	15/25/ 40/60°	24V/12VDC	2W	130LM



OUTER DIMENSIONS & ACCESSORIES




2055AS

LED COLOUR TEMPERATURE

2700-6000K R/G/B
RGB 3in1
RGB 3in1 DMX512
RGBW 4in1 / RGBW 4in1 DMX512

OPTICS



5° 8° 12° 25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM/CREE/EPISTAR
Glass	Tempered glass
Power cable	0.25m H05RN-F 2X0.5mm2/0.5m H05RN-F 3X1.0mm2 0.5m H05RN-F 4x0.75mm2/0.5m H05RN-F 2*1+3*0.5mm2 0.5m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
2055AS	1x2W OSRAM/CREE	2700-6000K R/G/B	5°/8°/12°/25°/ 40°/60°/80°/ 10*45°/25*45°	24V/12VDC	2.5W	120LM
		2700-6000K R/G/B				
	1x3W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	3W	50LM
		RGB 3in1 DMX512				
	1x4W EPISTAR	RGBW 4in1	12°/25°/40° /60°/12*45°	24VDC	4W	65LM
		RGBW 4in1 DMX512				



OUTER DIMENSIONS & ACCESSORIES



2050R

LED COLOUR TEMPERATURE

2700-6000K R/G/B

OPTICS



10° 25° 45° 60°


MATERIAL SPECIFICATIONS

Housing	6063# Aluminum Anodizing Silver
Light source	OSRAM/CREE
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
2050R	1x1.5W OSRAM/CREE	2700-6000K R/G/B	10°/25°/ 45°/60°	24V/12VDC	1.6W	80LM



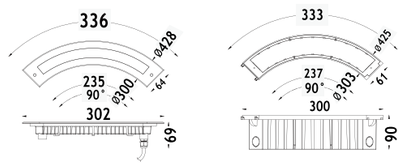


CRV336

LED COLOUR TEMPERATURE

2200-6500K R/G/B
RGB 3in1 DMX512
RGBW 4in1 DMX512

OPTICS



5° 8° 12° 25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM
Glass	Tempered glass
Power cable	0.25m H05RN-F 2X0.5mm2/0.5m H05RN-F 3*0.75mm2 0.5m H05RN-F 2*1+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
CRV336	6*2W OSRAM	2200-6500K R/G/B	5°/8°/10°/ 25°/40°/60°/ 80°/10*45° /15*60°/20°*40°	24VDC	12.5W	960LM
				220-240VAC		
	6*2.5W OSRAM	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	15W	435LM
	6*3.5W OSRAM	RGBW 4in1 DMX512			21W	609LM

OUTER DIMENSIONS & ACCESSORIES



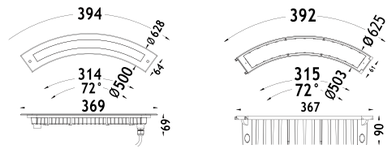


CRV394

LED COLOUR TEMPERATURE

2200-6500K R/G/B
RGB 3in1 DMX512
RGBW 4in1 DMX512

OPTICS



5° 8° 12° 25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM
Glass	Tempered glass
Power cable	0.25m H05RN-F 2X0.5mm2/0.5m H05RN-F 3X1.0mm2 0.5m H05RN-F 2*1+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
CRV394	9*2W OSRAM	2200-6500K R/G/B	5°/8°/10°/ 25°/40°/60°/ 80°/10*45° /15*60°/20°*40°	24VDC	18W	1380LM
				220-240VAC		
	9*2.5W OSRAM	RGB 3in1 DMX512	12°/25°/40° /60°/12*45°	24VDC	23W	660LM
	9*3.5W OSRAM	RGBW 4in1 DMX512			32W	928LM

OUTER DIMENSIONS & ACCESSORIES






IGL63159

LED COLOUR TEMPERATURE

2200-6500K R/G/B
RGB 3in1DMX512
RGBW 4in1 DMX512

OPTICS



5° 8° 12° 25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM/CREE
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2*1+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
IGL63159	3x2W OSRAM/CREE	2200-6500K R/G/B	5°/8°/10°/ 25°/40°/60°/80°/ 10*45°/15*60° /35°*45°	24VDC 120V/240V	6.2W	530LM
	3*2.5W OSRAM	RGB 3in1 DMX512	12°/25°/40° /60°/12*45°	24VDC	7.5W	210LM
	3*3.5W OSRAM	RGBW 4in1 DMX512			10.5W	310LM

OUTER DIMENSIONS & ACCESSORIES





IGL63159B

LED COLOUR TEMPERATURE

2200-6500KR/G/B / RGB3IN1 / RGB3in1DMX512

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM
Glass	Tempered glass frosted print
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 4x0.75mm2 / 0.5m H05RN-F 2*1+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
IGL63159B	10*SMD5050 OSRAM	2200-6500K R/G/B	/	24VDC 240V/120V	2.2W	22LM
		RGB3IN1 RGB 3in1 DMX512	/	24VDC	2.6W	22LM



LED COLOUR TEMPERATURE

2700-6000KR/G/B

RGB 3in1

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated 432U
Light source	OSRAM/CREE/EPISTAR
Glass	White Acrylic
Power cable	0.25m H05RN-F 2X0.5mm2/0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 4x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67





2055AS-1




2055AS-2



2055AS-4

OUTER DIMENSIONS & ACCESSORIES

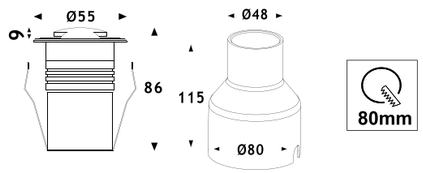

2055AS

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	24V/12VDC	2.5W	15LM
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	240V/120V	2.5W	15LM
	1x3W EPISTAR	RGB 3in1	/	24V/12VDC	2.5W	10LM
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	24V/12VDC	2.5W	25LM
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	240V/120V	2.5W	25LM
	1x3W EPISTAR	RGB 3in1	/	24V/12VDC	2.5W	15LM
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	24V/12VDC	2.5W	35LM
	1x2W OSRAM/CREE	2700-6000K R/G/B	/	240V/120V	2.5W	35LM
	1x3W EPISTAR	RGB 3in1	/	24V/12VDC	3W	20LM

04
Landscape spotlight




OPTICS




LED COLOUR TEMPERATURE

2700-6000K /
2700-6000K DMX512 /
RGBW4in1 DMX512


OUTER DIMENSIONS & ACCESSORIES




LS54100B



LS72128B




LS90160





LS136230

PHOTOMETRIC CURVES

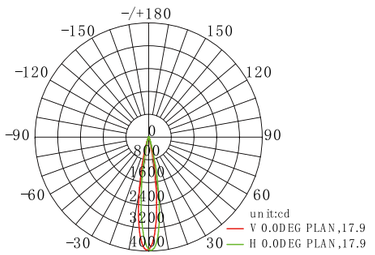

AVERAGE BEAM ANGLE(50%) : 17.9 DEG





Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS54100B	1x5W CREE XPG / OSRAM	2700-6000K	3°/8°/15°	24VDC	4.5W	350LM
				220-240VAC	3.5W	270LM
		2700-6000K DMX512	3°/8°/15°	24VDC	4.5W	350LM
	1x6W CREE 1304	2700-6000K	18°/24°/38°/60°	24VDC	6.7W	603LM
		2700-6000K	15°/24°/36° /45°/60°	220-240VAC		
		2700-6000K		220-240VAC Dim Triac		
		2700-6000K DMX512		24VDC		
	1x8W CREE XM-L	RGBW 4in1 DMX512	8°/15°/25° /40°/60° 15*30°	24VDC DimDMX512	8W	320LM
LS54100B	1x13W CREE 1512	2700-6000K	12°/24°/36°/55°	24VDC	12.6W	1310LM
		2700-6000K	12°/24°/36°/55°	220-240VAC	12.6W	1310LM
		2700-6000K	12°/24°/36°/55°	220-240VAC Triac dim	12.6W	1310LM
		2700-6000K	12°/24°/36°/55°	0-10V 220-240VAC	12.6W	1310LM
		2700-6000K	12°/24°/36°/55°	DALI 220-240VAC	12.6W	1310LM
		2700-6000K DMX512	12°/24°/36°/55°	24VDC	12.6W	1310LM
		2700-6000K DMX512	12°/24°/36°/55°	220-240VAC	12W	1310LM
	10W 5050 OSRAM	RGBW4in1 DMX512	8°/15°/30° /40°/60°	24VDC	8W	176LM
	10W 5050 OSRAM	RGBW4in1 DMX512	8°/15°/30° /40°/60°	220-240VAC	8W	176LM

MATERIAL SPECIFICATIONS


Housing	12#Die-cast aluminum Powder-coated Black/Grey
Light source	CREE XPG / OSRAM / CREE 1304 / CREE XM-L
Glass	Tempered glass
Power cable	0.5M H05RN-F 2x1.0mm2 / 0.5M H05RN-F 3X0.75mm2 0.5M H05RN-F 2X1.0+3*0.5mm2 0.5M H05RN-F 2x1.0mm2 0.5M H05RN-F 3X0.75mm2 H05RN-F power cable3x0.75-0.5M signal wire4*0.75-0.5M*2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS90160	3x5W OSRAM	2200-6500K	3°/8°/15°	24VDC	13W	1140LM
		2200-6500K	3°/8°/15°	220-240VAC	13W	1140LM
		2200-6500K	3°/8°/15°	220-240VAC Triac dim	13W	1140LM
		2200-6500K	3°/8°/15°	0-10V 220-240VAC	13W	1140LM
		2200-6500K	3°/8°/15°	DALI 220-240VAC	13W	1140LM
		2200-6500K DMX512	3°/8°/15°	24VDC	13W	1140LM
		2200-6500K DMX512	3°/8°/15°	220-240VAC	13W	1140LM
	3x8W 5050 OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	24W	530LM
	3x8W 5050 OSRAM	RGBW4in1 DMX512	8°/15°/30° /40°/60°	220-240VAC	24W	530LM
LS136230	6x7W CREE XHP35	2200-6500K	3°/8°/15°	24VDC	42W	2520LM
		2200-6500K	3°/8°/15°	220-240VAC	42W	2520LM
		2200-6500K	3°/8°/15°	220-240VAC Triac dim	42W	2520LM
		2200-6500K	3°/8°/15°	0-10V DALI 220-240VAC	42W	2520LM
		2200-6500K DMX512	3°/8°/15°	24VDC	42W	2520LM
	6x10W CREE XM-L	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	60W	1350LM
	6x10W CREE XM-L	RGBW4in1 DMX512	8°/15°/30° /40°/60°	220-240VAC	60W	1350LM

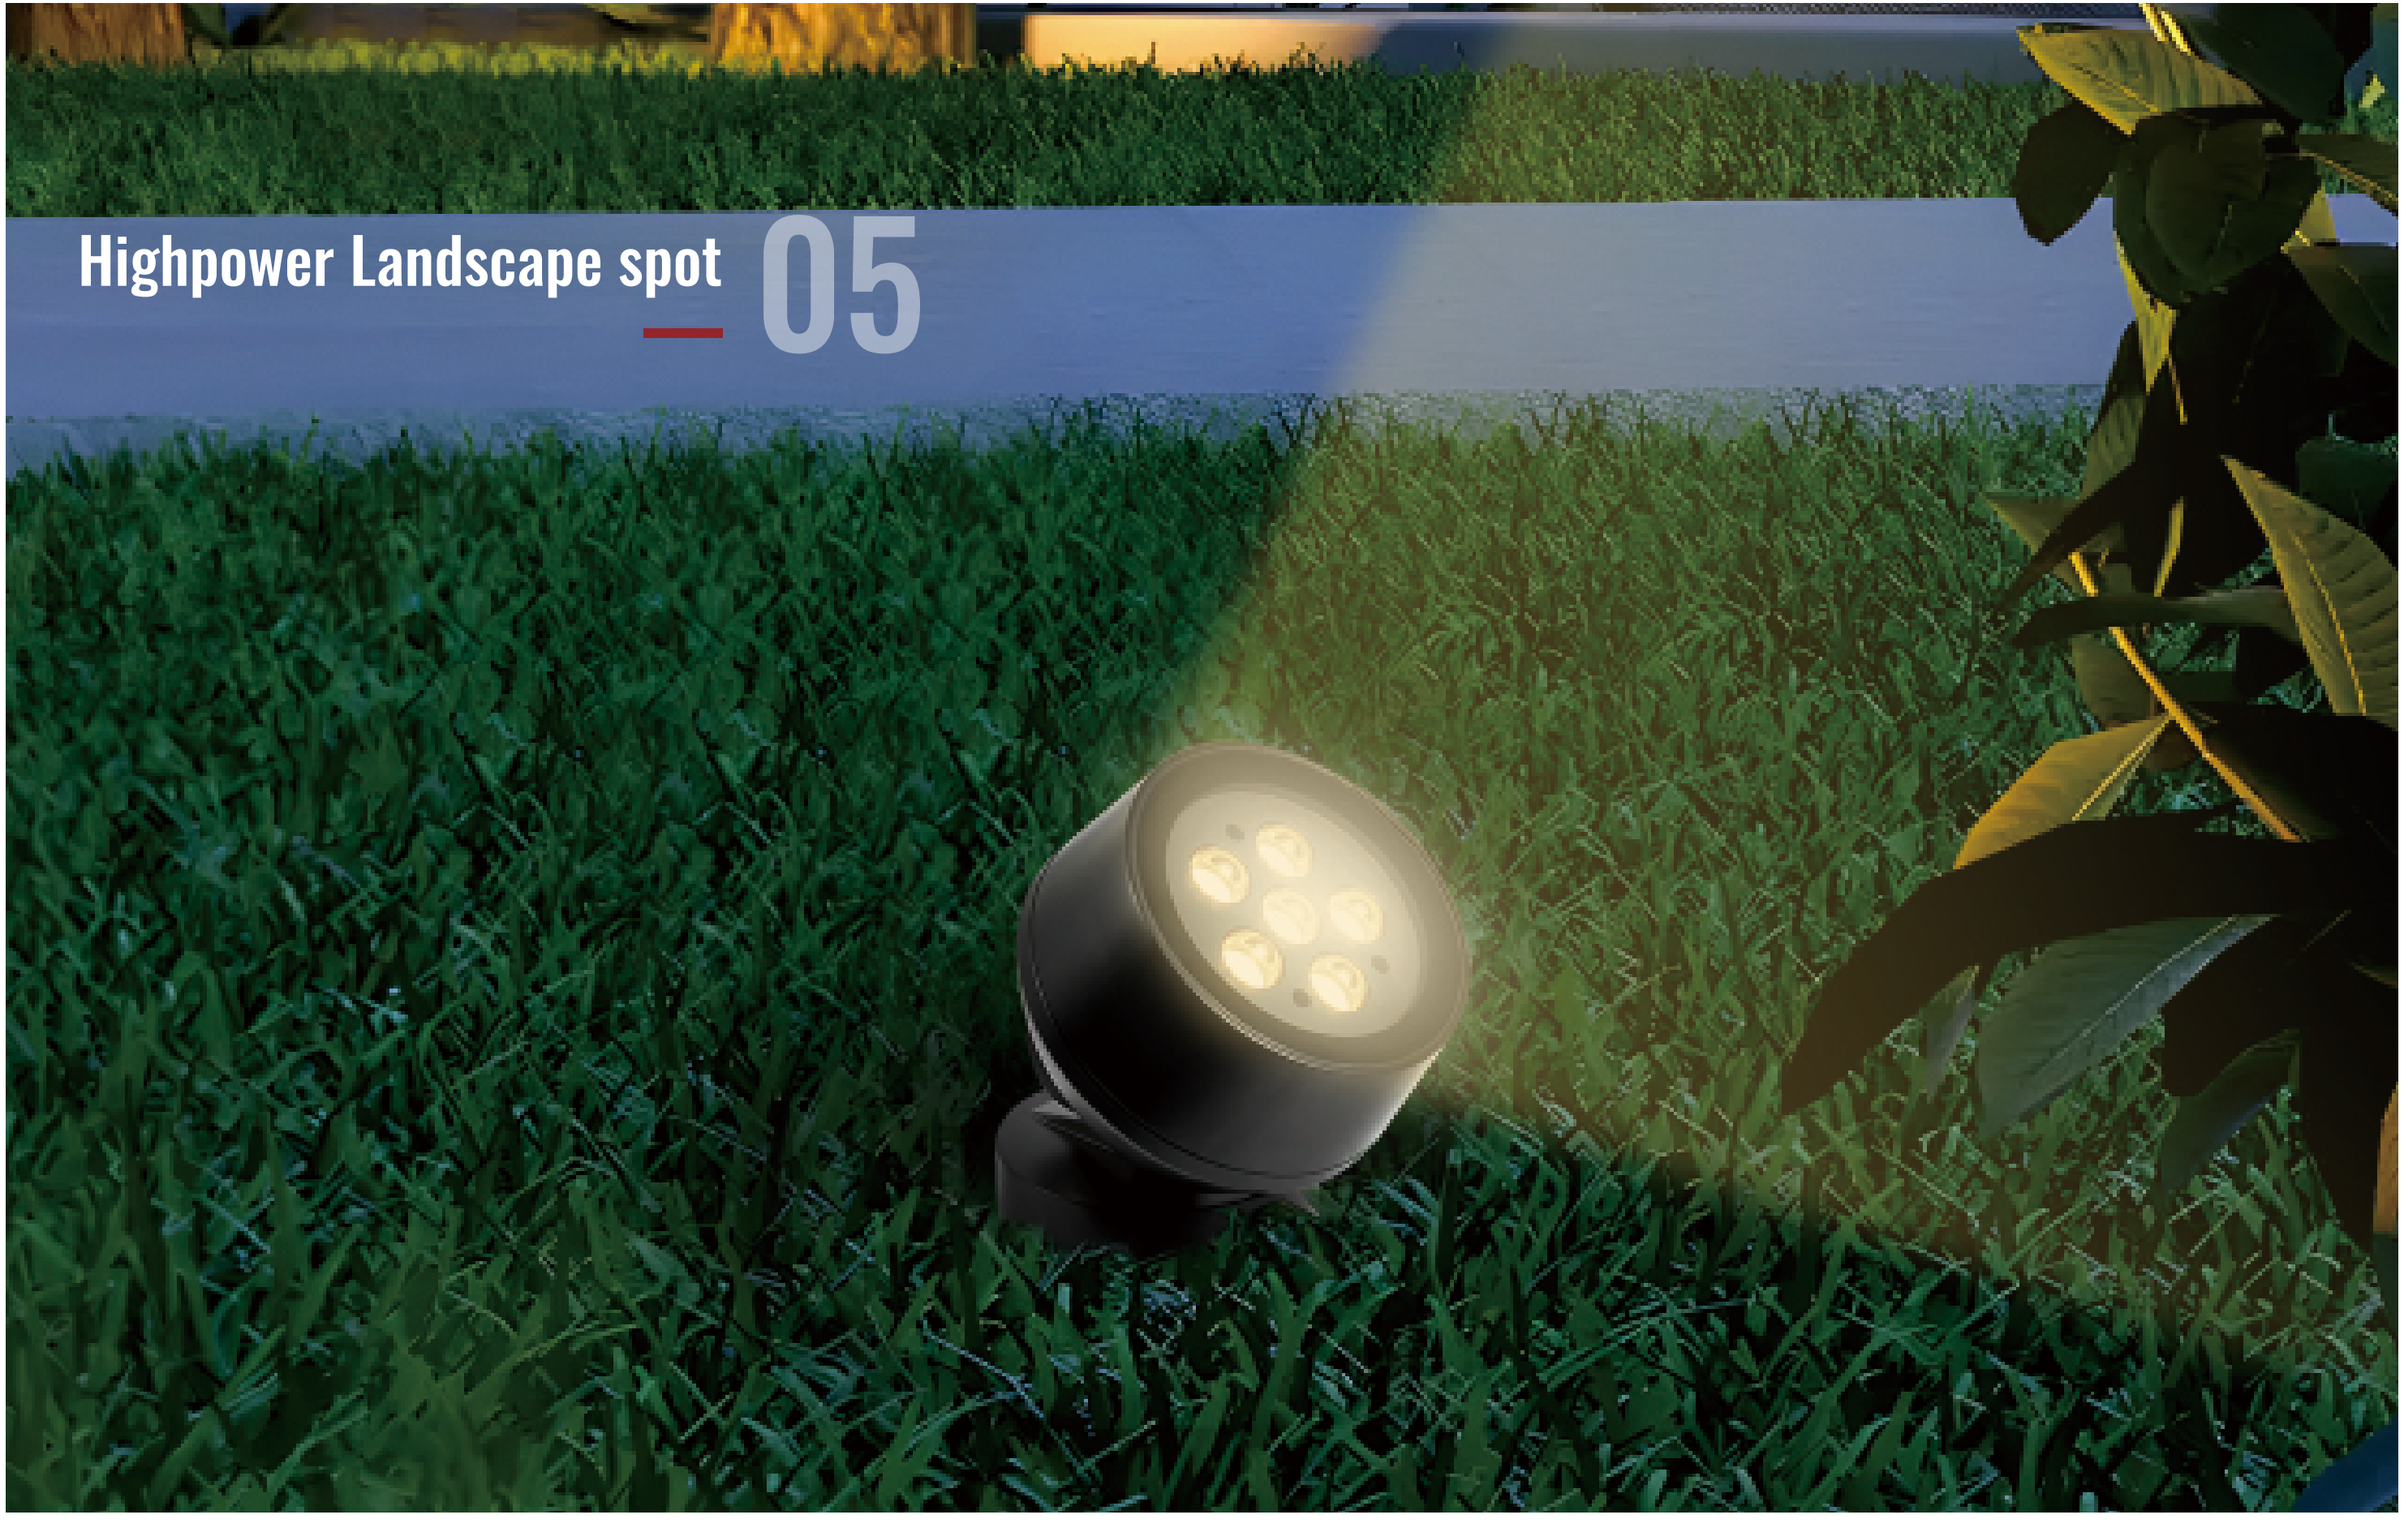

Highpower Landscape spot
05

OUTER DIMENSIONS & ACCESSORIES


LS11478

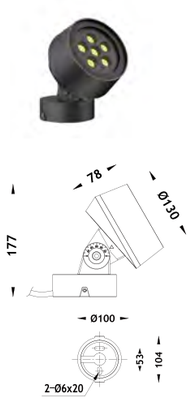


LS150101

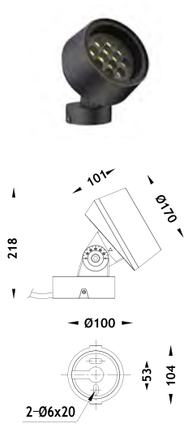


LS185125

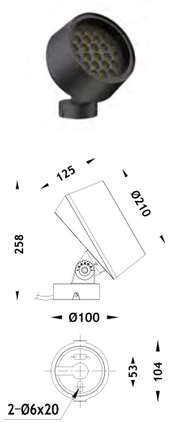

LS229152

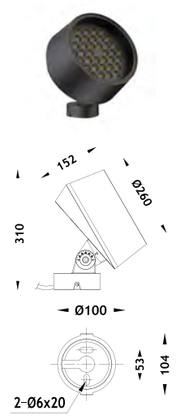

DIFFERENT INSTALLATION METHODS

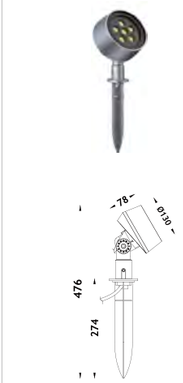

OPTICS

18° 24° 38° 60°

LED COLOUR TEMPERATURE

2200-6500K

2200-6500K DMX512

RGBW 4IN1 DMX512

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black/Grey
Light source	CREE XPG /OSRAM
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2 0.5m H07RN-F 2x1.0mm2 0.5m H07RN-F 3x1.0mm2 H05RN-F Power cable3x0.75-0.5M Signal wire4*0.75-0.5M*2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS11478	3x4W CREE XPG /OSRAM	2200-6500K	3°/8°/15°	24VDC	12.6W	700LM
				220-240VAC		
			3°/8°/15°	220-240VAC Triac dim		
				0-10V 220-240VAC		
			3°/8°/15°	DALI 220-240VAC		
		2200-6500K DMX512	3°/8°/15°	24VDC		
				220-240VAC		
	3x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	10.5W	560LM
				220-240VAC		
LS150101	6x4W CREE XPG /OSRAM	2200-6500K	3°/8°/15°	24VDC	24W	1340LM
				220-240VAC		
			3°/8°/15°	220-240VAC Triac dim		
			3°/8°/15°	0-10V 220-240VAC	24W	
				DALI 220-240VAC		
		2200-6500K DMX512	3°/8°/15°	24VDC		
				220-240VAC		
	6x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	21W	
				220-240VAC		
LS185125	12x4W CREE XPG /OSRAM	2200-6500K	3/8/15°	24VDC	48W	2400LM
				220-240VAC		
			3°/8°/15°	220-240VAC Triac dim		
			3°/8°/15°	0-10V 220-240VAC		
				DALI 220-240VAC		
		2200-6500K DMX512	3°/8°/15°	24VDC		
				220-240VAC		
	12x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	42W	
				220-240VAC		
LS229152	18x4W CREE XPG /OSRAM	2200-6500K	3°/8°/15°	24VDC	72W	4500LM
				220-240VAC		
			3°/8°/15°	220-240VAC Triac dim		
			3°/8°/15°	0-10V 220-240VAC		
				DALI 220-240VAC		
		2200-6500K DMX512	3°/8°/15°	24VDC		
				220-240VAC		
	18x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24VDC	60W	
				220-240VAC		


06

Square landscape Spot

Different installation methods









OUTER DIMENSIONS & ACCESSORIES

LS17050









LS21050









LS26050








LED COLOUR TEMPERATURE

2200-6500K / 2200-6500K DMX512 /RGBW 4IN1 DMX512

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black/Grey
Light source	CREE XPG /OSRAM
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3X0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2 0.5m H07RN-F 2x1.0mm2 0.5m H07RN-F 3x1.0mm2 H05RN-F power cable3x0.75-0.5M signal wire4*0.75-0.5M*2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

OPTICS



3° 8° 15° 30° 40° 60°

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS17050	6x4W CREE XPG /OSRAM	2200-6500K	3/8/15°	24 VDC 220-240VAC	22W	1320LM
	6x4W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC Triac dim 0-10V 220-240VAC	22W	1320LM
	6x4W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC DALI	22W	1320LM
	6x4W CREE XPG /OSRAM	2200-6500K DMX512	3/8/15°	24VDC 220-240VAC	22W	1320LM
	6x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24 VDC 220-240VAC	21W	1320LM
LS21050	12x3.5W CREE XPG /OSRAM	2200-6500K	3/8/15°	24 VDC 220-240VAC	40W	2400LM
	12x3.5W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC Triac dim 0-10V 220-240VAC	40W	2400LM
	12x3.5W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC DALI	40W	2400LM
	12x3.5W CREE XPG /OSRAM	2200-6500K DMX512	3/8/15°	24VDC 220-240VAC	42W	2400LM
	12x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24 VDC 220-240VAC	42W	2400LM
LS26050	18x3W CREE XPG /OSRAM	2200-6500K	3/8/15°	24 VDC 220-240VAC	54W	3240LM
	18x3W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC Triac dim 0-10V 220-240VAC	54W	3240LM
	18x3W CREE XPG /OSRAM	2200-6500K	3/8/15°	220-240VAC DALI	54W	3240LM
	18x3.5W CREE XPG /OSRAM	2200-6500K DMX512	3/8/15°	24VDC 220-240VAC	54W	3240LM
	18x3.5W OSRAM	RGBW 4IN1 DMX512	8°/15°/30° /40°/60°	24 VDC 220-240VAC	63W	3240LM



LED COLOUR TEMPERATURE

2200-6000K/R/G/B / RGBW 4in1/ RGBW 4in1 DMX512 / 2700-6000K/
2200-6000K/R/G/B DMX512 / RGB 3in1 / RGB 3in1DMX512 /
2700-6000K DMX512/

OPTICS



MATERIAL SPECIFICATIONS

Housing	6063# aluminum Powder-coated Black/white/Silver
Light source	OSRAM / CREE / CREE COB
Glass	Tempered glass T=2.0MM
Power cable	0.5M H05RN-F 2x1.0mm2 0.5M H05RN-F 2x1.0mm2+3*0.5mm2 0.5M H05RN-F 3X0.75mm2 0.5M H05RN-F 4x0.75mm2 / 0.5M H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA


Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS3045	1x5W OSRAM/CREE	2200-6000K /R/G/B	5°/8°/10°/30° /40°/60°/90°/ 10*45°/20*65°	24V/12VDCA	4.5W	380LM
		2200-6000K /R/G/B DMX512		100-240VAC	3.5W	300LM
				24V/12VDC	4.5W	380LM
	1x3W OSRAM	RGB 3in1	12°/25°/40°/ 60°/12*45°	24V/12VDC	3W	75LM
		RGB 3in1 DMX512				
	1x4W OSRAM	RGBW 4in1	12°/25°/40°/ 60°/12*45°	24V/12VDC	4W	100LM
		RGBW 4in1DMX512				
	1x6W CREE COB	2700-6000K	15°/24° /36°/55°	24V/12VDC	6.2W	465LM
		2700-6000K DMX512		100-240VAC		
				24V/12VDC		
LS3045R	1x5W OSRAM/CREE	2200-6000K/R/G/B DMX512	5°/8°/10°/30° /40°/60°/90°/ 10*45°/20*65°	24V/12VDC	4.5W	315LM
		2700-6000K R/G/B		100-240VAC	3.5W	250LM
				24V/12VDC	4.5W	315LM
	1x3W OSRAM	RGB 3in1	12°/25°/40°/ 60°/12*45°	24V/12VDC	3W	60LM
		RGB 3in1 DMX512				
	1x4W OSRAM	RGBW 4in1			4W	80LM
		RGBW 4in1DMX512				


OUTER DIMENSIONS & ACCESSORIES




LS3045 LS3045R

PHOTOMETRIC CURVES








Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance



LED COLOUR TEMPERATURE

2200-6000K/R/G/B / RGBW 4in1/ RGBW 4in1 DMX512 / 2700-6000K/
2200-6000K/R/G/B DMX512 / RGB 3in1 / RGB 3in1DMX512 /
2700-6000K DMX512/

OPTICS



MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black/White/Grey
Light source	OSRAM / CREE / CREE COB
Glass	Tempered glass T=2.0MM
Power cable	0.5M H05RN-F 2x1.0mm2 0.5M H05RN-F 2x1.0mm2+3*0.5mm2 0.5M H05RN-F 3X0.75mm2 0.5M H05RN-F 4x0.75mm2 / 0.5M H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA


Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
LS3065	1x6W CREE COB	2700-6000K	15°/24° /36°/55°	24V/12VDCA	6.2W	400LM
		2700-6000K DMX512		100-240VAC		
	3x4W OSRAM/CREE	2200-6500K	5°/8°/10°/30° /40°/60°/90°/ 10*45°/20*65°	24V/12VDC	12W	960LM
		2200-6500K DMX512		24V/12VDC		
	3x3W OSRAM/CREE	2200-6500K	5°/8°/10°/30°/40°/ 60°/90°/10*45°/20*65°	240V/120V	9W	720LM
	3x2.5W OSRAM	RGB 3in1	12°/25°/40° /60°/12*45°	24V/12VDC	8W	200LM
		RGB3in1 DMX512				
	3x3.5W OSRAM	RGBW 4in1	12°/25°/40° /60°/12*45°	24V/12VDC	10.5W	465LM
		RGBW 4in1DMX512				
	1x12W CREE COB	2700-6000K	12°/24°/35°/60°	24V/12VDC	12W	1260LM
				240V/120V		
		2700-6000K DMX512	12°/24°/35°/60°	24V/12VDC		
LS3065R	3x4W OSRAM/CREE	2200-6500K	5°/8°/10°/30°/ 40°/60°/90°/ 10*45°/20*65°	24V/12VDC	12W	840LM
		2200-6500K DMX512				
	3x3W OSRAM/CREE	2200-6500K	12°/25°/40° /60°/12*45°	240V/120V	9W	630LM
	3x2.5W OSRAM	RGB 3in1	12°/25°/40° /60°/12*45°	24V/12VDC	10.5W	200LM
		RGB 3in1 DMX512				
	3x3.5W OSRAM	RGBW 4in1	12°/25°/40° /60°/12*45°	24V/12VDC	10.5W	260LM
		RGBW 4in1 DMX512				
	1x12W CREE COB	2700-6000K	12°/24°/35°/60°	24V/12VDC	12W	1080LM
				240V/120V		
		2700-6000K DMX512	12°/24°/35°/60°	24V/12VDC		

OUTER DIMENSIONS & ACCESSORIES





LS3065 LS3065R

PHOTOMETRIC CURVES

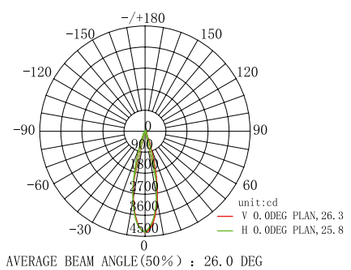

AVERAGE BEAM ANGLE(50%) : 26.0 DEG






Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance



OUTER DIMENSIONS & ACCESSORIES

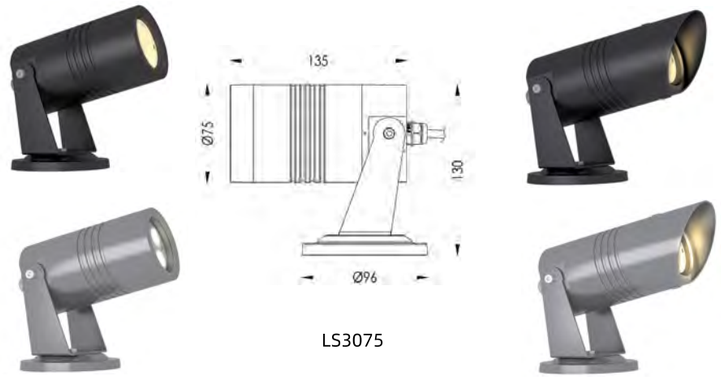


LS3075





LS3075R

PHOTOMETRIC CURVES

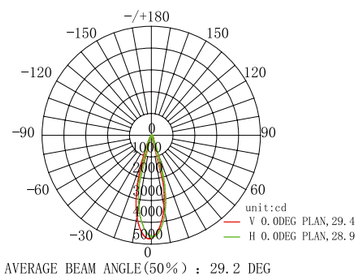

AVERAGE BEAM ANGLE(50%) : 29.2 DEG





Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

LED COLOUR TEMPERATURE

2200-6500K / 2200-6500K DMX512 / RGB 3in1 / RGB 3in1 DMX512 / RGBW 4in1 / RGBW 4in1 DMX512 / 2700-6000K / 2700-6000K DMX512 /

OPTICS



15° 24° 36° 55°

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black/White/Grey
Light source	OSRAM / CREE / CREE COB
Glass	Tempered glass T=2.0MM
Power cable	0.5M H05RN-F 2x1.0mm2 0.5M H05RN-F 2x1.0mm2+3*0.5mm2 0.5M H05RN-F 3X0.75mm2 0.5M H05RN-F 4x0.75mm2 / 0.5M H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	65

TECHNICAL DATA


Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power (Ref.)	Lumen(LM)
LS3075	4x4W OSRAM/CREE	2200-6500K	5°/8°/10°/30°/40°/60°/90°/10*45°/20*65°	24V/12VDC	16W	1280LM
		2200-6500K DMX512		24V/12VDC		
	4x3W OSRAM/CREE	2200-6500K		240V/120V	11W	880LM
	4x2.5W OSRAM/CREE	RGB 3in1	12°/25°/40°/60°/12*45°	24V/12VDC	10W	250LM
		RGBW 3in1 DMX512				
	4x3.5W OSRAM	RGBW 4in1	12°/25°/40°/60°/12*45°	24V/12VDC	14W	350LM
		RGBW 4in1DMX512				
	1x16W CREE COB	2700-6000K	12°/24°/36°/55°	24V/12VDC	16W	1840LM
				240V/120V		
		2700-6000K DMX512	12°/24° /36°/55°	24V/12VDC		
LS3075R	4x4W OSRAM/CREE	2200-6500K	5°/8°/10°/30°/40°/60°/90°/10*45°/20*65°	24V/12VDC	16W	1120LM
		2200-6500K DMX512		24V/12VDC		
	4x3W OSRAM/CREE	2200-6500K		240V/120V	11W	770LM
	4x2.5W OSRAM/CREE	RGB 3in1	12°/25°/40°/60°/12*45°	240V/120V	11W	250LM
		RGB 3in1DMX512		240V/120V	10W	250LM
	4x3.5W OSRAM	RGBW 4in1	12°/25°/40°/60°/12*45°	24V/12VDC	14W	200LM
		RGBW 4in1 DMX512				
	1x16W CREE COB	2700-6000K	12°/24°/36°/55°	24V/12VDC	16W	1680LM
				240V/120V		
		2700-6000K DMX512	12°/24° /36°/55°	24V/12VDC		



OUTER DIMENSIONS & ACCESSORIES



UD11855



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD11855	3x2W OSRAM/CREE	2200-6500K /R/G/B	10°/15°/20°/30°/ 45°/60°10*30° /10*60°/20°*40°	12/24VDC	6.2W	530LM
	3*2W EPISTAR	R/G/B		12/24VDC		360LM
	3x2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	12/24VDC	7.5W	230LM
		RGB 3in1 DMX512		24VDC External		
	3x3.5W EPISTAR	RGBW 4in1	12°/25°/40° /60°/12*45°	24VDC External	10.5W	320LM
		RGBW 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES





LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS


Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD16265	6X2W OSRAM/CREE	2200-6500K /R/G/B	10°/15°/20°/30°/ 45°/60°10*30° /10*60°/20°*40°	24VDC	12.5W	980LM
	6X2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	15W	490LM
		RGB 3in1 DMX512		24VDC External		
	6X3.5W EPISTAR	RGBW 4in1	12°/25°/40° /60°/12*45°	24VDC	21W	680LM
		RGB 4in1 DMX512		24VDC External		
	9X2W OSRAM/CREE	RGBW 4in1	10°/15°/20°/30°/ 45°/60°10*30° /10*60°/20°*40°	24VDC	17.6W	1360LM
	9X2W EPISTAR	RGB			18W	980LM
	9X2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	22W	660LM
		RGB 3in1 DMX512		24VDC External		

OUTER DIMENSIONS & ACCESSORIES





LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD18565	12X2W OSRAM/CREE	2200-6500K /R/G/B	10°/15°/20°/30°/ 45°/60°10*30° /10*60°/20°*40°	24VDC	24W	1920LM
		RGB			24.2W	1440LM
	12X2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	30W	900LM
		RGB 3in1 DMX512				
	12X3.5W EPISTAR	RGBW 4in1	12°/25°/40° /60°/12*45°	24VDC External	42W	1260LM
		RGBW 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




UD13558



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
ip	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD13558	4x2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/30°/ 45°/60°10*30°/ 10*60°/20°*40°	24VDC	8.6W	660LM
	4x2.5W OSRAM/CREE	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	10W	300LM
	4x2.5W OSRAM/CREE	RGB 3in1 DMX512	12°/25°/40° /60°/12*45°	24VDC External	10W	300LM
	4x3.5W EPISTAR	RGB 4in1	12°/25°/40° /60°/12*45°	24VDC	14W	420LM
		RGB 4in1 DMX512		24VDC External		
UD13558B	1x8W CREE1304	2700-6000K	12°/25°/40° /60°/12*45°	24VDC	8.6W	780LM

OUTER DIMENSIONS & ACCESSORIES




UD18054



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2/ 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD18054	6x2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/30°/ 45°/60°10*30°/ 10*60°/20°*40°	24VDC	12.6W	1008LM
	6x2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	15W	490LM
		RGB 3in1 DMX512		24VDC External		
	6x3.5W EPISTAR	RGB 4in1	12°/25°/40° /60°/12*45°	24VDC External	21W	680LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES



UD18054C



LED COLOUR TEMPERATURE

single color / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 /3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD18054C	6x2W OSRAM/CREE	single color	10°/15°/20°/30°/ 45°/60°10*30°/ 10*60°/20°*40°	24VDC	12.5W	980LM
	6x2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	15W	490LM
		RGB 3in1 DMX512		24VDC External		
	6x3.5W EPISTAR	RGB 4in1	12°/25°/40° /60°/12*45°	24VDC External	21W	680LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES



UD20555



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB 3in1 / RGB
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2/ 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD20555	12x2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/30°/ 45°/60°10*30°/ 10*60°/20°*40°	24VDC	24.8W	2000LM
		RGB			24W	1440LM
	12x2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	30W	960LM
		RGB 3in1 DMX512				
	12x3.5W EPISTAR	RGB 4in1	12°/25°/40° /60°/12*45°	24VDC	42W	1350LM
		RGB 4in1 DMX512				
UD20555B	6x3.5W EPISTAR	2700-6000K	15/24°/36°/60°	24VDC	24.8W	2300LM

OUTER DIMENSIONS & ACCESSORIES



UD25056

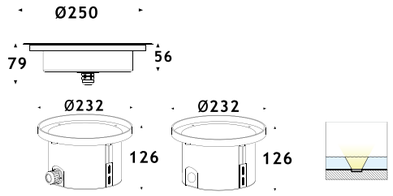

LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD25056	18x2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/30°/ 45°/60°10*30°/ 10*60°/20°*40°	24VDC	36W	2900LM
	18x2.5W EPISTAR	RGB 3in1	12°/25°/40° /60°/12*45°	24VDC	45W	1800LM
		RGB 3in1 DMX512				
	18x3.5W EPISTAR	RGB 4in1	12°/25°/40° /60°/12*45°	24VDC	63W	2500LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




UD25056C

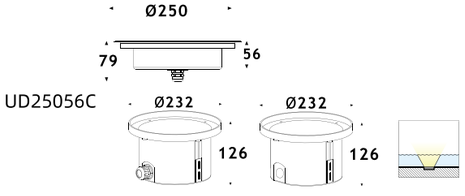

LED COLOUR TEMPERATURE

Single Color / RGB / RGB DMX512

OPTICS



25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	316L# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD25056C	36x1.5W OSRAM/CREE	single color	15°/30°/40°/60°	24VDC	54W	4320LM
	18x2.5W EPISTAR	RGB	15°/30°/40°/60°	24VDC	54W	3240LM
	18x3.5W EPISTAR	RGB DMX512	25°/40°60°	24VDC	72W	2800LM



OUTER DIMENSIONS & ACCESSORIES



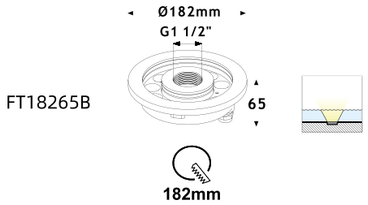

LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



MATERIAL SPECIFICATIONS


Housing	316# SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT18265B	9*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	18W	1450LM
	9*2W EPISTAR	R/G/B				1080LM
	9*2.5W EPISTAR	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	23W	1380LM
		RGB 3IN1		24VDC		690LM
		RGB 3in1 DMX512		24VDC External		690LM
	9*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	32W	960LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES



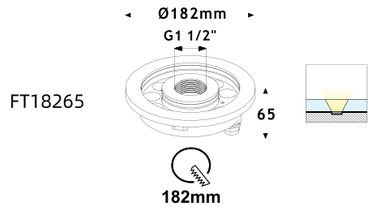

LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



MATERIAL SPECIFICATIONS


Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT18265	12*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	24.2W	1950LM
	12*2W EPISTAR	R/G/B				1440LM
	12*2.5W EPISTAR	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	30W	1800LM
		RGB 3IN1		24VDC		900LM
		RGB 3in1 DMX512		24VDC External		900LM
	12*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	42W	1260LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




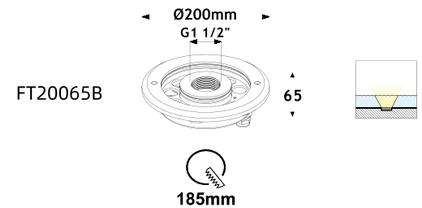

LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



MATERIAL SPECIFICATIONS

Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
	68


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT20065B	9*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	18W	1450LM
		R/G/B				1080LM
	9*2.5W OSRAM/CREE	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	23W	1380LM
		RGB 3IN1		24VDC		690LM
		RGB 3in1 DMX512		24VDC External		690LM
	9*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	32W	690LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES



FT20065



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



10° 20° 30° 45° 60°

MATERIAL SPECIFICATIONS

Housing	316#SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT20065	12*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	24.2W	1950LM
	12*2W EPISTAR	R/G/B				1440LM
	12*2.5W EPISTAR	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	30W	1800LM
		RGB 3IN1		24VDC		900LM
		RGB 3in1 DMX512		24VDC External		900LM
	12*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	42W	1260LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




FT17060



LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



10° 20° 30° 45° 60°

MATERIAL SPECIFICATIONS


Housing	316#SUS
Light source	OSRAM / CREE / EPISTAR
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5X0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT17060	9*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	18W	1450LM
		R/G/B				1080LM
	9*2.5W EPISTAR	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	23W	1380LM
		RGB 3IN1		24VDC		690LM
		RGB 3in1 DMX512		24VDC External		690LM
	9*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	32W	690LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




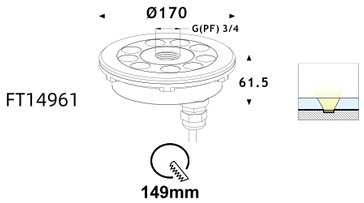

LED COLOUR TEMPERATURE

2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512 / RGB DMX512

OPTICS



MATERIAL SPECIFICATIONS


Housing	316#SUS
Light source	OSRAM / CREE / EPISTAR /
Glass	Tempered glass
Power cable	3m H07RN-F 2x1.0mm2 / 3m H05RN-F 4X0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT14961	9*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	18W	1450LM
	9*2W EPISTAR	R/G/B				1080LM
	9*2.5W EPISTAR	RGB DMX512	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	23W	1380LM
		RGB 3IN1		24VDC		690LM
		RGB 3in1 DMX512		24VDC External		690LM
	9*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	32W	960LM
		RGB 4in1 DMX512				

OUTER DIMENSIONS & ACCESSORIES




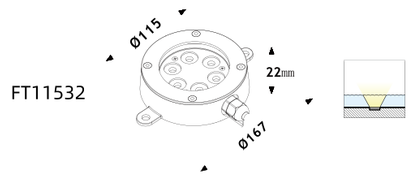

LED COLOUR TEMPERATURE

2200-6500K/R/G/B
RGB 3in1 / RGB 3in1 DMX512
RGBW 4in1/ RGBW 4in1 DMX512

OPTICS



MATERIAL SPECIFICATIONS

Housing	316#SUS
Light source	OSRAM/CREE / EPISTAR /
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 3m H05RN-F 4x0.75mm2 3m H05RN-F 2x1.0mm2+3*0.5mm2 / 3m H05RN-F 5x0.5mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
FT11532	6*2W OSRAM/CREE	2200-6500K/R/G/B	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	12.6W	1020LM
	6*2.5W EPISTAR	RGB 3IN1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC	15W	450LM
		RGB 3in1 DMX512		24VDC External		
	6*3.5W EPISTAR	RGBW 4in1	10°/15°/20°/ 30°/45°/60° 10*30°/10*60°	24VDC External	21W	630LM
		RGB 4in1 DMX512				



OUTER DIMENSIONS & ACCESSORIES




UD95102



UD125122



UD150129

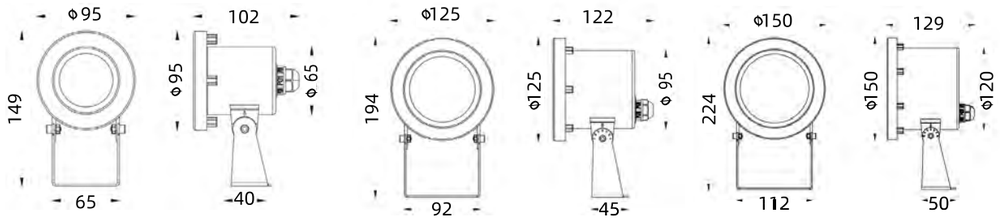

LED COLOUR TEMPERATURE


2200-6500K/R/G/B / RGB / RGB 3in1
RGB 3in1 DMX512 / RGBW 4in1/
RGBW 4in1 DMX512

OPTICS





25° 40° 60°

PHOTOMETRIC CURVES

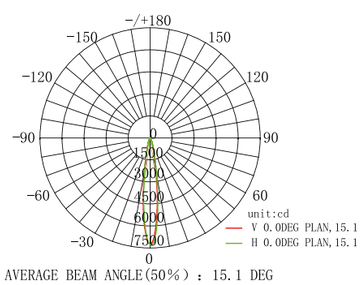

AVERAGE BEAM ANGLE(50%) : 15.1 DEG





Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

MATERIAL SPECIFICATIONS

Housing	316#SUS
Light source	CREE / OSRAM
Glass	Tempered glass
Power cable	3m H05RN-F 2*1.0mm2 3m H05RN-F 2*1.0+3*0.5mm2 3m H07RN-F 2*1.0mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	68

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
UD95102	3*2W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC	6.5W	520LM
	3*2W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC DMX512	6.5W	520LM
	3*2.5W OSRAM	RGB 3IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	8W	200LM
	3*3.5W OSRAM	RGBW 4IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	10.5W	260LM
UD125122	6*2.5W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC	15W	1200LM
	6*2.5W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC DMX512	15W	1200LM
	6*2.5W OSRAM	RGB 3IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	15W	450LM
	6*3.5W OSRAM	RGBW 4IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	21W	630LM
UD150129	12*2.5W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC	30W	2400LM
	12*2.5W CREE/OSRAM	2200-6500K/R/G/B	5°/10°/25°/40°/60° 80°/10*45°/25*45°	24VDC DMX512	30W	2400LM
	12*2.5W OSRAM	RGB 3IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	30W	900LM
	12*3.5W OSRAM	RGBW 4IN1	12°/25°/40° /60°/12*45°	24VDC DMX512	42W	1260LM


10

Wall Washer Linear





OUTER DIMENSIONS & ACCESSORIES

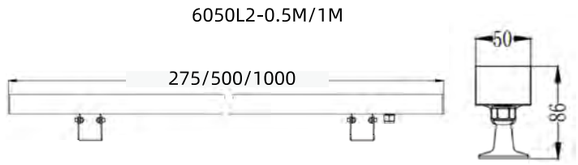

LED COLOUR TEMPERATURE

1800-6500K R/G/B

RGB 3IN1 / RGBW 4IN1

OPTICS



MATERIAL SPECIFICATIONS

Housing	6063# aluminum Powder-coated Black
Light source	OSRAM / EPISTAR
Glass	Tempered glass
Power cable	0.5m H07RN-F 2x1.0mm2 / 0.5m H05RN-F 3*0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2 Female&male connnector
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67


TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
6050L2-0.5M	12*1W OSRAM	1800-6500KR/G/B	10°/15°/24°30°/ /36°/60°/10*30°/ 15*45°/10*60°/ 20°*40°	24VDC	12W	690LM
	12*1W OSRAM	1800-6500KR/G/B		220-240VAC External	12W	690LM
	12*2W EPISTAR	1800-6500KR/G/B		24VDC	24W	1390LM
	12*2W EPISTAR	1800-6500KR/G/B		220-240VAC External	24W	1390LM
	18*1W OSRAM	1800-6500KR/G/B		24VDC	18W	/
	18*1W OSRAM	1800-6500KR/G/B		220-240VAC External	18W	/
	18*1.5W EPISTAR	1800-6500KR/G/B		24VDC	24W	/
	18*1.5W EPISTAR	1800-6500KR/G/B		220-240VAC External	24W	/
	12*1W OSRAM	1800-6500KR/G/B		24VDC DMX512	12W	690LM
	12*2W EPISTAR	1800-6500KR/G/B		24VDC DMX512	24W	1390LM
	12*2.5W OSRAM	RGB 3IN1		24VDC DMX512	30W	840LM
	12*3.5W OSRAM	RGBW 4IN1		24VDC DMX512	42W	1180W
6050L2-1M	24*1W OSRAM	1800-6500KR/G/B	10°/15°/24°30°/ /36°/60°/10*30°/ 15*45°/10*60°/ 20°*40°	24VDC	12W	690LM
	24*1W OSRAM	1800-6500KR/G/B		220-240VAC External	12W	690LM
	24*2W EPISTAR	1800-6500KR/G/B		24VDC	24W	1390LM
	24*2W EPISTAR	1800-6500KR/G/B		220-240VAC External	24W	1390LM
	24*1W OSRAM	1800-6500KR/G/B		24VDC	18W	/
	24*2W EPISTAR	1800-6500KR/G/B		220-240VAC External	18W	/
	24*2.5W OSRAM	1800-6500KR/G/B		24VDC	24W	/
	24*3.5W OSRAM	1800-6500KR/G/B		220-240VAC External	24W	/



OUTER DIMENSIONS & ACCESSORIES

6072L2-0.5M/1M

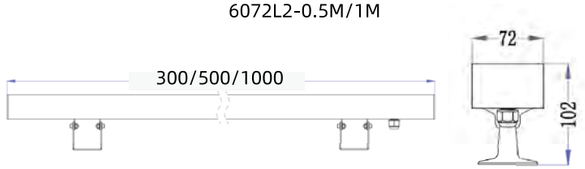


LED COLOUR TEMPERATURE

1800-6500K R/G/B

RGB 3IN1 / RGBW 4IN1

OPTICS



MATERIAL SPECIFICATIONS


Housing	6063# aluminum Powder-coated Black
Light source	OSRAM / EPISTAR
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2 / 0.5m H05RN-F 3*0.75mm2 0.5m H05RN-F 2x1.0+3*0.5mm2 Female&male connnector 0.5m H07RN-F 2x1.0mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
6072L2-0.5M	24*1W OSRAM	1800-6500KR/G/B	10°/15°/24°30°/ /36°/60°/10*30°/ 15*45°/10*60°/ 20°*40°	24VDC	24W	1390LM
	24*1W OSRAM	1800-6500KR/G/B		220-240VAC External	24W	1390LM
	24*1.5W EPISTAR	1800-6500KR/G/B		24VDC	36W	2080LM
	24*1.5W EPISTAR	1800-6500KR/G/B		220-240VAC External	36W	2080LM
	24*1.5W EPISTAR	1800-6500KR/G/B		24VDC DMX512	36W	2080LM
	24*2.5W OSRAM	1800-6500KR/G/B		24VDC DMX512	60W	1680LM
	24*3.5W OSRAM	1800-6500KR/G/B		24VDC DMX512	84W	2350LM
6072L2-1M	48*1W OSRAM	1800-6500KR/G/B	10°/15°/24°30°/ /36°/60°/10*30°/ 15*45°/10*60°/ 20°*40°	24VDC	48W	2780LM
	48*1W OSRAM	1800-6500KR/G/B		220-240VAC External	48W	2780LM
	48*1.5W EPISTAR	1800-6500KR/G/B		24VDC	72W	4180LM
	48*1.5W EPISTAR	1800-6500KR/G/B		220-240VAC External	72W	4180LM
	48*1W OSRAM	1800-6500KR/G/B		24VDC DMX512	48W	2780LM
	48*1.5W EPISTAR	1800-6500KR/G/B		24VDC DMX512	72W	4180LM
	48*2.2W OSRAM	RGB 3IN1		24VDC DMX512	108W	3140LM
	48*3W OSRAM	RGBW 4IN1		24VDC DMX512	144W	4180LM






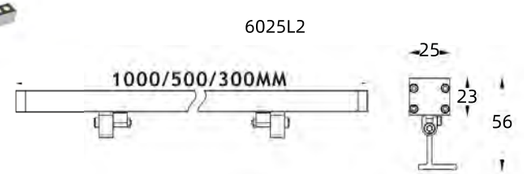

LED COLOUR TEMPERATURE

1800-6500K R/G/B

OPTICS



MATERIAL SPECIFICATIONS

Housing	6063# aluminum Powder-coated Black
Light source	OSRAM
Glass	Tempered glass
Power cable	0.25m H05RN-F 2x1.0mm2 Female&male connnector 0.25m H05RN-F 3*0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
6025L2-0.3M	12*0.8W OSRAM	1800-6500K R/G/B	15°/20°/30° /45°/10*65°	24VDC 220-240VAC External	10W	690LM
6025L2-0.5M	18*0.8W OSRAM	1800-6500K R/G/B	15°/20°/30° /45°/10*65°	24VDC 220-240VAC External	14W	1100LM
6025L2-1M	36*0.8W OSRAM	1800-6500K R/G/B	15°/20°/30° /45°/10*65°	24VDC 220-240VAC External	28W	2380LM

11


WATERPROOF CEILING LIGHT




OUTER DIMENSIONS & ACCESSORIES

SM11465B









SM15068B








SM20898B







LED COLOUR TEMPERATURE

2700-6500K

OPTICS



15° 24° 36° 60°

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black /Grey
Light source	CREE COB
Glass	Tempered glass
Power cable	0.5m H05RN-F 2x1.0mm2/ 0.5m H05RN-F 3*0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
SM11465B	1*15W CREE COB	2700-6500K	5°/8°/10°/30°/40°/ 60°/90°/10*45°/20*65°	12/24 VDC	15W	1200LM
	1*15W CREE COB	2700-6500K	5°/8°/10°/30°/40°/ 60°/90°/10*45°/20*65°	220-240VAC		
SM15068B	1*30W CREE COB	2700-6500K	12/24/36/65°	12/24 VDC	30W	3000LM
	1*30W CREE COB	2700-6500K	12/24/36/65°	220-240VAC		
SM20898B	4*12W CREE COB	2700-6500K	12/24/36/65°	12/24 VDC	45W	4050LM
	4*12W CREE COB	2700-6500K	12/24/36/65°	220-240VAC		




LED COLOUR TEMPERATURE


2200-6500K R/G/B/

OUTER DIMENSIONS & ACCESSORIES


SMS17090



SMS21090



OPTICS



15° 25° 40° 60°

MATERIAL SPECIFICATIONS

Housing	12#Die-cast aluminum Powder-coated Black /Grey
Light source	CREE/OSRAM
Glass	Tempered glass
Power cable	0.5m H07RN-F 2x1.0mm2 0.5m H05RN-F 3*0.75mm2
Operating temperature	-20℃~40℃
Dimmable support	Triac / PWM / 1-10V / Dali / DMX512
IP	67

TECHNICAL DATA

Item No.	LED	LED Color	Beam Angle	Input Voltage	Work Power（Ref.）	Lumen(LM)
SMS17090	12*2W CREE/OSRAM	2200-6500K R/G/B/	15°/25°/40°/60°/ 90°	24VDC	24W	1920LM
	12*2W CREE/OSRAM	2200-6500K R/G/B/	15°/25°/40°/60°/ 90°	220-240VAC	24W	
SMS21090	24*1.7W CREE/OSRAM	2200-6500K R/G/B/	15°/25°/40°/60°/ 90°	24VDC	40W	3200LM
	24*1.7W CREE/OSRAM	2200-6500K R/G/B/	15°/25°/40°/60°/ 90°	220-240VAC	40W	

12

AMBIENT LAMP

Solar energy waterproof Uv protection



Item Name

Portable Light

Product Dimension

Ø150*400mm (base:135x2.5mm, shell :D145X125),
box size :17.5x17.5x15.5cm



Key Specification

01 Charger:DC5V 1A, without adapter, USB line

02 ABS handle, Wood surface

03 Waterproof IP54 , With remote control

04 CE/RoHS/UL approval

05 PE plastic material (UV8,FDA)

06 Li battery 2000 mAh

07 6pcs RGB LED +4 warm LED(3000K), solor 0.7W



Item Name

Table lamp

Product Dimension

Ø24x45cm Light body :D24x20CM,
base :D200X2.8mm)



Key Specification

01 Charger:DC5V 1A, without adapter, USB line

02 Waterproof IP54 ,

03 6pcs warm LED(3000K), solor 1.2W

04 CE/RoHS/UL approval

05 PE plastic material (UV8,FDA)

06 Li battery 2000 mAh

07 solar Light switch and ON/OFF switch.



Item Name

LED Speaker

Product Dimension

Dimension : 200x200x290MM
light body :(D185X190)



Key Specification

01
Charger:DC5V 1A, without adapter, USB line 1.5m

02
PE plastic material (UV8,FDA)

03
RGB 16 color changing, 6pcs RGB LED 3'Specker

04
Li battery 2000 mAh

05
24 keys controler, remote contro 5M distance

06
Working time>8H, charge time< 5hours

07
Waterproof IP44, with Wood handheld

08
CE/RoHS/UL approval



Item Name

Table lamp

Product Dimension

Ø150*400mm (base:135x2.5mm,
shell :D145X125),box size :17.5x17.5x15.5cm



Key Specification

01
Li-ion battery 18650 2000mA/h

02
Outdoor use, IP44, CE&RoHS.

03
Light source: 3000k/3w; RGB /1W, With remote control

04
working time: Lighting about 8 hours while charging 4 hours.

05
Pull cord switch (ON /OFF/ Color Selection)

06
Li battery 2000 mAh

07
LED rechargeable , Include 1.m Type-c cable (Without Adapter) , Solor 0.7W


Item Name

Floor lamp

Product Dimension

Dimension: Ø300x1500mm

Light body (D300x150mm, base :D250X30mm)

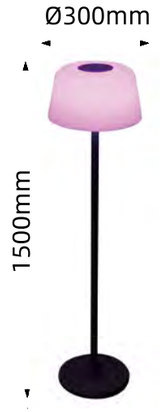

Key Specification

01

Charger:DC5V 1A, No adapter, with Typc usb Line 2M , solar 1W

02

6RGB+14pcs W led 3w, warm light(3000K) . With remote control

03

Li battery 2000 mAh

04

CE/RoHS/UL approval

05

Waterproof IP54 with iron foot, Detachable foot, D24X20 lamp, D25X2cm base

06

PE plastic material (UV8,FDA)


07

work time:RGB:20H, white light max power :4H , charge time 6H



FLOOD LIGHT AND STREET LIGHT



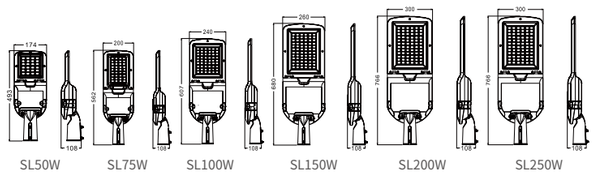

SL50W SL75W SL100W SL150W SL200W SL250W

SL

Product information


Power	**50W/75W/100W/150W/200W/250W**
Beam angle	60°/90°/120°/T2M
Input voltage	AC 100-240V
Input frequency	50/60Hz
System Luminous flux	Ra>70 160lm/W Ra>90 130lm/W
CRI	Ra＞70
Finish color	White+Titanium

Mode


Product Code	Power	lm/W	Luminance	Product Code	Power	lm/W	Luminance
SL50W	50W	160lm/W	8160lm	SL150W	150W	160lm/W	24320lm
SL75W	75W	160lm/W	1216lm	SL200W	200W	160lm/W	32480lm
SL100W	100W	160lm/W	16320lm	SL250W	250W	160lm/W	40320lm

Light distribution parameters


SL50W 50W 6500K Ra＞70 MT2




SL75W 75W 6500K Ra＞70 MT2




S100W 100W 6500K Ra＞70 MT2




SL150W 150W 6500K Ra＞70 MT2




SL200W 200W 6500K Ra＞70 MT2



SL250W 250W 6500K Ra＞70 MT2





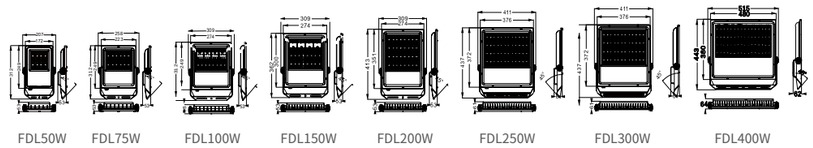

FDL50W FDL75W FDL100W FDL150W FDL200W FDL250W FDL300W FDL400W

FDL

Product information


Power	**50W/75W/100W/150W/200W/250W/300W/400W**
Beam angle	30°/60°/90°/120°/T2M/T3M 50*120° polarized light 30*90° polarized light
Input voltage	AC 100-240V
Input frequency	50/60Hz
System Luminous flux	Ra>70 160lm/W Ra>90 130lm/W
CRI	Ra＞70
Finish color	White+Titanium

Mode


Product Code	Power	lm/W	Luminance	Product Code	Power	lm/W	Luminance
SL50W	50W	160lm/W	8160lm	SL150W	150W	160lm/W	24320lm
SL75W	75W	160lm/W	1216lm	SL200W	200W	160lm/W	32480lm
SL100W	100W	160lm/W	16320lm	SL250W	250W	160lm/W	40320lm

Light distribution parameters


FDL50W 50W Ra＞70 120°




FDL75W 75W Ra＞70 120°




FDL100W 100W Ra＞70 120°




FDL150W 150W Ra＞70 120°




FDL200W 200W Ra>70 120°



FDL300W 300W Ra>70 120°



FDL400W 400W Ra>70 90°






SUNFLOWER SOLAR LIGHT

This product is widely used in gardens, parks, yards, and along pathways

• SUNFLOWER Solar Light is our latest outdoor lighting design, featuring
both a solar panel and DC charging functions. Made from die-cast aluminum, it offers excellent UV resistance and heat dissipation. The telescopic spike allows for tool-free installation and easy adjustment to the desired height

• During the day, the solar panel charges the battery, and the light
automatically turns on at night—no switch required. The light source is positioned beneath the lamp head to provide glare-free illumination.





UGR<19 · Flicker free · IP65

2700K · 3000K · 4000K

1800K-3000K · 2700K-6500K

Triac Dimming · Bluetooth · Zigbee

1~10V · DALI · PLC

GS20002

Product information


Power	**2W**
Charge Voltage	DC5V
Beam Angle	120°
Charging Time	3H
Working Hours	8H
CRI	Ra＞80/90/97
Finish color	Black

Product performance

Protection IP	IP65
Battery & Capacity	Lithium Battery 3.7V 1500mA
Lumen	280Lm
Light Fixture Material	Aluminium
Control	On/off automatically with the light sensor
Charging	Solar charging/Dc charging







UGR＜19 Flicker free IP65

2700K 3000K 4000K

1800K-3000K 2700K-6500K

Triac Dimming Bluetooth Zigbee

1~10V DALI PLC

GS20002S

Product information

Power	**2W**
Charge Voltage	DC5V
Beam Angle	120°
Charging Time	3H
Working Hours	8H
CRI	Ra＞80/90/97
Finish color	Black

Product performance

Protection IP	IP65
Battery & Capacity	Lithium Battery 3.7V 1500mA
Lumen	280Lm
Light Fixture Material	Aluminium
Control	On/off automatically with the light sensor
Charging	Solar charging/Dc charging